


**UTL** 尤提乐电气有限公司  
UTILITY ELECTRICAL CO.,LTD.

服务热线 **400-021-8088**

E-mail:[marketing@china-utl.com](mailto:marketing@china-utl.com)

Http://[www.china-utl.com](http://www.china-utl.com)

版本号 :2024.05

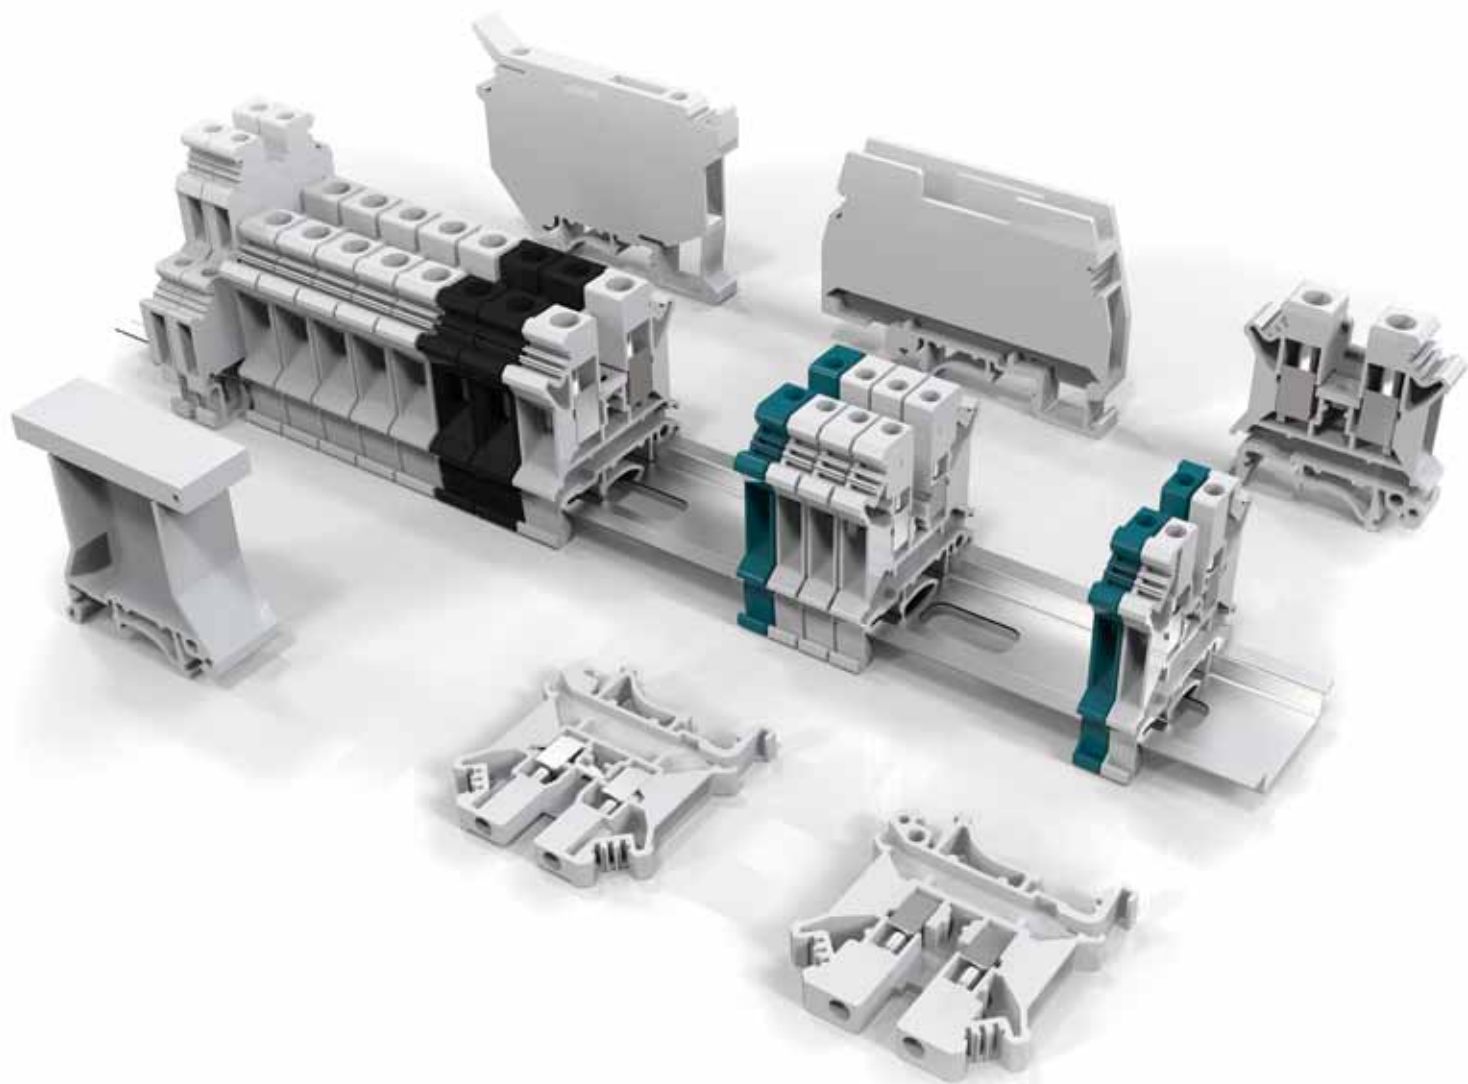

# Industrial Distribution Terminal Blocks

工业配电接线端子





The image features a teal background with a large, stylized white graphic element that resembles a thick, curved line or a partial circle. In the center of this graphic, the letters "UTL" are written in a bold, white, sans-serif font.

**UTL**



## 企业简介

尤提乐电气有限公司成立于 1990 年，是专业接线端子生产企业，是该行业里技术力量雄厚、成长迅速、极具规模化的企业。公司一贯坚持“以人为本，以市场为导向”的经营理念，在产品标准方面，尤提乐潜心研究了 IEC、UL、TUV、GB、CE、CCC、ROHS、REACH 等国内外相关标准，并按照这些标准自行编制了更为严格的企业标准，从产品的开发、模具的设计、原材料的采购、金属零部件的制作、塑料配件的成型，到成品组装以及品质检测、包装发货等，每个环节均由专业的人员按照相应的标准层层把关，以生产适销对路、应用于全球范围内工业自动化领域的产品为己任，积极追随、引进、借鉴国际知名品牌产品的技术，科技创新，锐意进取。目前公司生产的数十个系列，上千个规格的产品，为客户选型提供了丰富的产品保障。公司通过了德国莱茵 TUV ISO9001 质量管理体系及 ISO14001 环境体系认证，绝大部分产品通过了 UL、CUL、TUV、CCC、CE 认证，部分产品通过了 VDE 认证，所有产品均符合 Rohs 环保要求。

产品主要销往法国、俄罗斯、巴西、东南亚、港台等地区，作为一家以外销为主（出口 65%）的民营独资企业，尤提乐置身于国际市场，直接感受市场气息，当面倾听客户需求，不断提升产品设计、生产、经营、管理过程中的技术含量，对生产作业的全过程实施科学的管理。近年来“尤提乐”名声遍及大江南北，“尤提乐”的经营理念发挥得淋漓尽致、深得人心，“尤提乐”的服务颇得广大客户赞赏。“腾飞的尤提乐，骄傲的尤提乐人”，尤提乐人正是凭借先进的管理模式、雄厚的技术实力、完善的工艺制程、一流的检测设备和精湛的模具加工技术，以生产出高性价比的产品为前提，凭借卓越的销售团队、周密的销售网络、专业化的服务，赢得了开拓市场新篇章的今天。



## Introduction

---

Utility Electrical Co., Ltd, a professional manufacturer of all kinds of wire connection terminal blocks, was founded in 1990. UTL has grown into a leading manufacturer with strong R&D strength; rapid growth and large scale in this field.

The company has consistently adhered to the "people-oriented, market-oriented" business philosophy, product standards, UTILITY painstaking research of the IEC, UL, TUV, GB, CE, CCC, RoHS, REACH and other international and domestic standards for terminals, and in accordance with these standards preparing their own more stringent corporate standards, from the development, mold design, raw material procurement, production, plastic parts molding products, metal parts, to finished product assembly and quality testing, packaging, shipping, etc., each link are 'Checking at all levels' accordance with the appropriate standards by the professional staff to produce marketable, used worldwide industrial automation products as their responsibility to actively follow the introduction, learn technology, science and technology innovation internationally famous brand products, forge ahead. The company produced dozens of series, thousands of specifications of products for our customers to provide a rich selection of product protection. UTL has passed TUV Rheinland ISO9001 quality management system certification, the vast majority of products through the UL, CSA, CCC, CCS, CE certification, some products through the VDE certification, all products comply with Ro environmental requirements.

With the spirit of 'Pursuing Excellence, Innovating for Quality'. UTL always keeps the promise All best service for all customers'. UTL warmly welcome domestic and foreign customers to cooperate with us to make prosperous future.



## 匠心尤存 至臻致远

高品质是赢得市场的保证，而有效的现代化管理和质量体系是支撑高品质的前提。在产品标准方面，尤提乐潜心研究了 IEC、UL、CSA、GB、CE、CCC 等国际国内关于接线端子的标准，并按照这些标准自行编制了更为严格的企业标准，从产品的开发、模具的设计、原材料的采购、金属零部件的制作、塑料配件的成型，到成品组装以及品质检测、包装发货等，每个环节均由专业的人员按照相应的标准层层把关，以生产适销对路、应用于全球范围内工业自动化领域的产品为己任，积极追随、引进、借鉴国际知名品牌的技术，科技创新，锐意进取。目前公司生产的数十个系列，上千个规格的产品，为客户选型提供了丰富的产品保障。

High quality is the guarantee of winning the market, while effective modern management and quality system is the premise to support high quality. In terms of product standards, especially UTL has studied IEC, UL, CSA, GB, CE, CCC with great concentration and other international and domestic standards for wiring terminals, and according to these standards, The company has compiled stricter corporate standards, from product development, mold design, procurement of raw materials, production of metal parts, plastic parts. From the forming of parts, to the assembly of finished products, quality inspection, packaging and delivery, etc. Each link is checked by professional personnel according to the corresponding standards. To produce marketable products, used in the field of industrial automation worldwide products as their own responsibility, actively follow, introduce and learn from internationally renowned brand technology, technological innovation, and forge ahead. The company currently produces dozens of a series of products with thousands of specifications, providing a wealthy of choices for customers product guarantee.

# 目录

## CONTENTS



UPT 系列  
UPT Series  
03



JUT3 系列  
JUT3 Series  
93



JUT5 系列  
JUT5 Series  
116



JUT15 系列  
JUT15 Series  
31




JUT4 系列  
JUT4 Series  
107



JUT6 系列  
JUT6 Series  
117




JUT14 系列  
JUT14 Series  
39



JUT10 系列  
JUT10 Series  
108



JUT8 系列  
JUT8 Series  
119




JUT1 系列  
JUT1 Series  
51




JUT11 系列  
JUT11 Series  
109



附件  
Attachment  
120



JUK1 系列  
JUK1 Series  
71



JUT13 系列  
JUT13 Series  
114



JUT2 系列  
JUT2 Series  
82



JUT17 系列  
JUT17 Series  
115





# INDUSTRIAL DISTRIBUTION TERMINAL BLOCKS


## 工业配电接线端子


### 直插式

直插式接线端子 (综合环境首选) 直插式接线端子主要由外壳, 直插按钮, 簧导电片 4 部分组成。接线时, 无需使用任何工具, 将刚性导线直接插入, 柔导线需配备端头使用, 通过按压按钮可直接退出导线。接线效率高, 退线方便。最新的设计融合了前代接线端子的优点, 并集成了测试孔, 无需移除导线或者桥接件。并提供定制功能的种类。

### Push-in model

In line terminal block (preferred for comprehensive environment) In line terminal is mainly composed of four parts: shell, in line button, spring and conductive sheet. When wiring, it is not necessary to use any tools to directly insert rigid wires. Flexible wires need to be equipped with terminals for use. The wires can be directly exited by pressing the button. High wiring efficiency and convenient wire withdrawal. The latest design combines the advantages of the previous generation of terminal blocks, and integrates test holes without removing wires or bridge pieces. It also provides the types of customization functions.

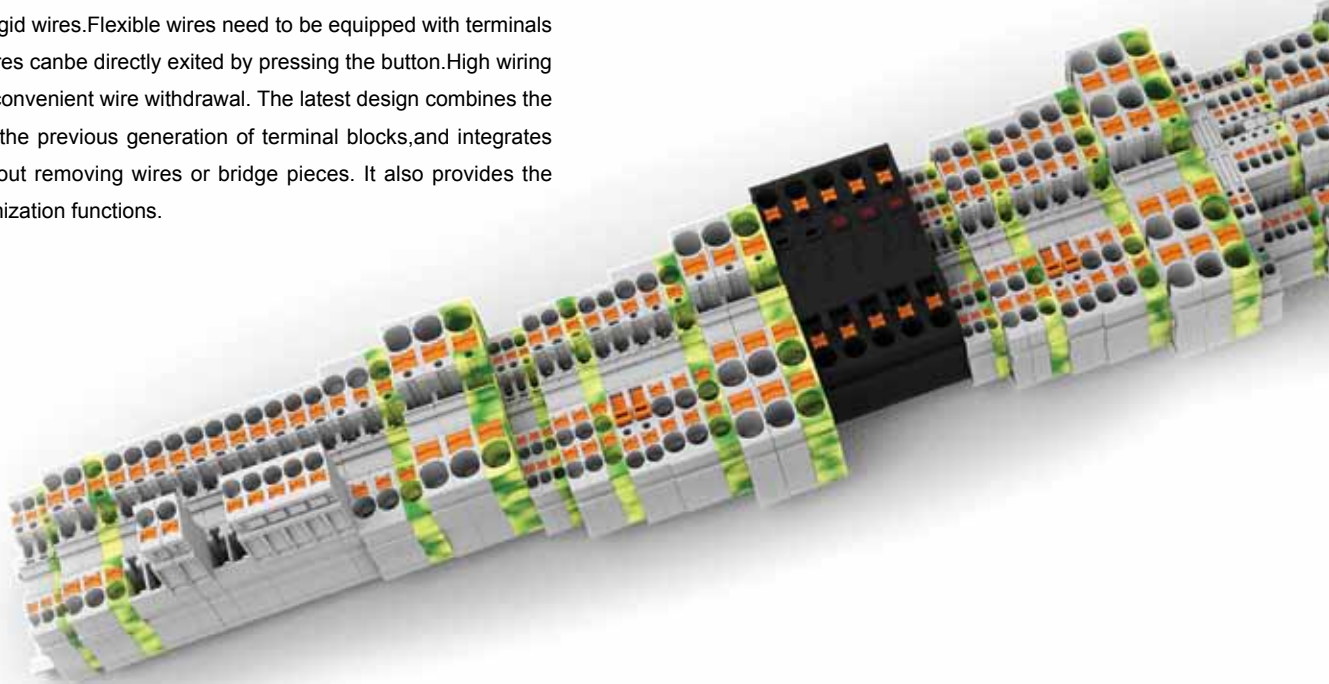

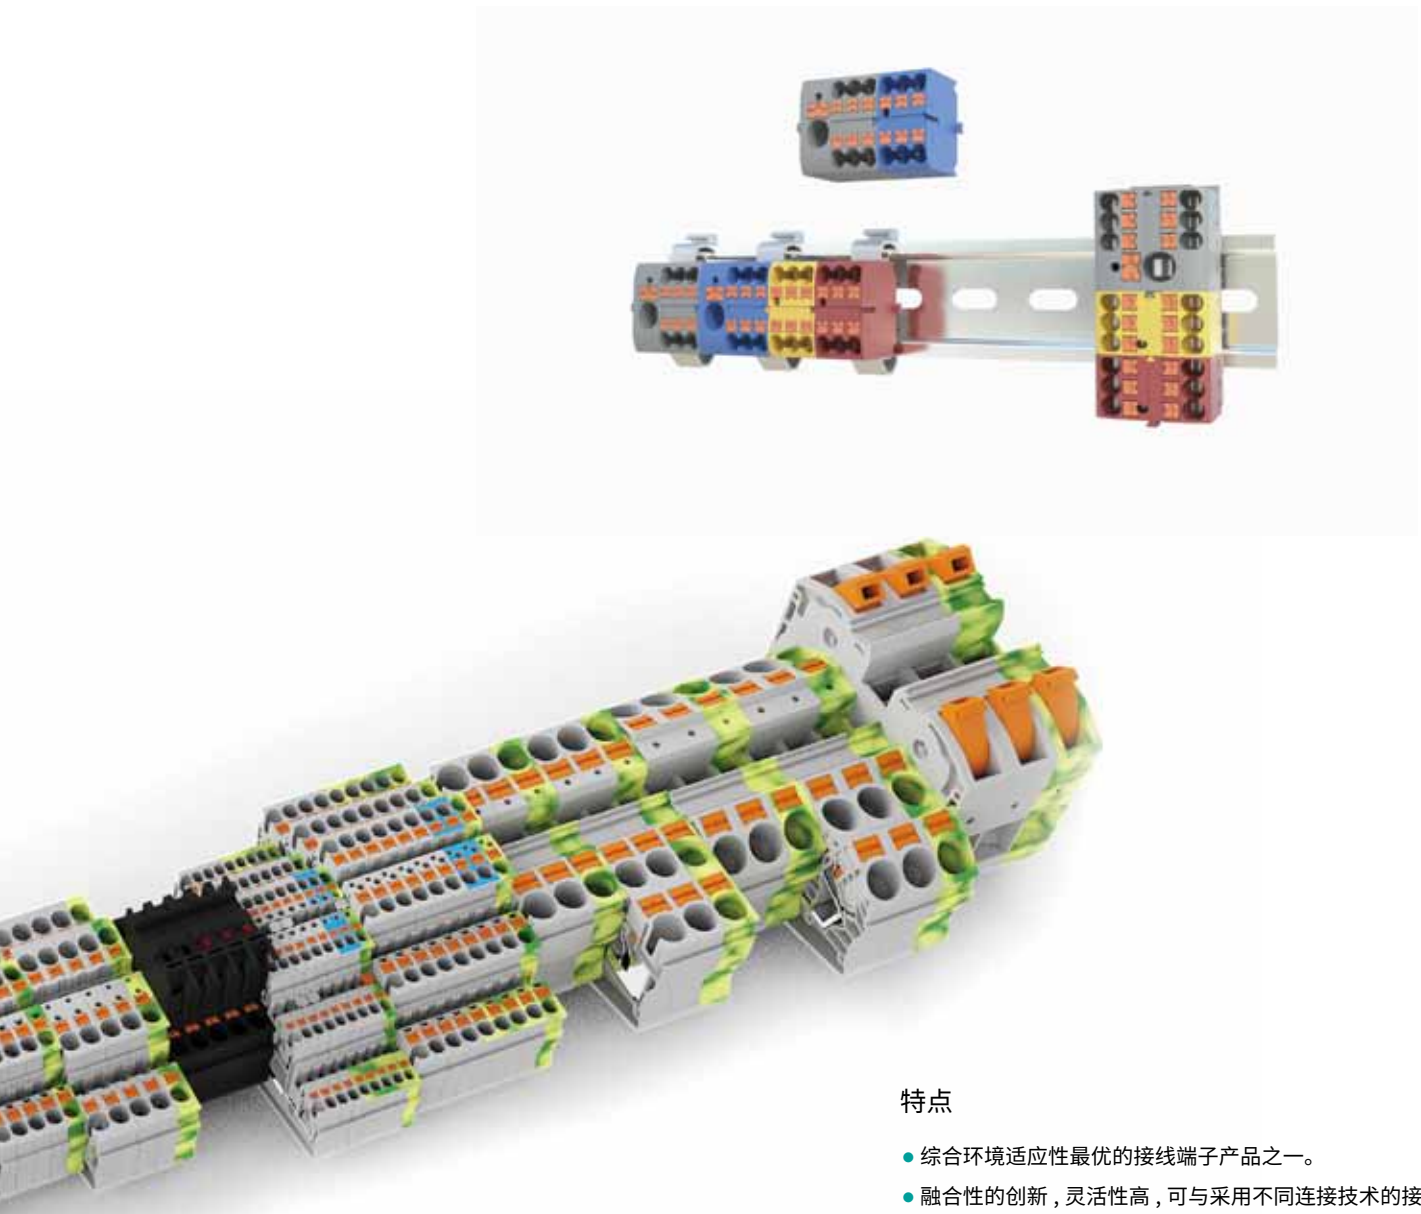

### 特点

- 综合环境适应性最优的接线端子产品之一。
- 融合性的创新，灵活性高，可与采用不同连接技术的接线端子随意组合。
- 桥接井设计与测试孔，使桥接更稳定测试更轻松。
- 具有丰富统一的配件库，方便记忆和使用，降低成本。

### Advantage

- One of the terminal blocks with the best comprehensive environmental adaptability.
- It is innovative and flexible, and can be freely combined with terminal blocks using different connection technologies.
- Bridging well design and test hole make bridging more stable and testing easier.
- It has a rich and unified accessories library, which is convenient for memory and use and reduces costs.

# Industrial Distribution Terminal Blocks

## Push-in terminal block

### 工业配电接线端子 - 直插式接线端子

**特点:**

采用不同连接技术的接线端子可随意组合，灵活性高  
 采用桥接并结构，桥接和测试更轻松  
 额外集成测试孔，无需移除导线或桥接件  
 采用统一的桥接、表示和测试配件，节约更多成本  
 丰富的数字数据

**Features:**

Terminal blocks with different connection technologies can be combined at will for greater flexibility  
 Bridge and test is easier with bridge well structure  
 Additional integrated test holes without removing wires or bridges  
 Additional cost savings with unified bridging, marking and test accessories  
 rich numbers



UPT

#### UPT-1.5

##### 直插式接线端子 Push-in terminal block

厚 / 宽 / 高 / 高	3.5/45/30.5/32			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:26-14	0.2-1.5	0.2-1.5	17.5	500

#### UPT-1.5PE

##### 直插式接线端子 Push-in terminal block

厚 / 宽 / 高 / 高	3.5/45/30.5/32			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )			
Rigid cable	Soft cable			
AWG:26-14	0.2-1.5	0.2-1.5		

#### 说明 Specification 简图 Schematic Drawing

直插式接线端子：可安装在 NS35 型导轨上  
 Push-in terminal block  
 Can be installed on tracks NS35 type

#### 型号 Model 订货号 Order Number

UPT-1.5	灰色 (GY)	3360142
	蓝色 (BE)	3360183
	灰色 (GY)-M101	3360214

#### 型号 Model 订货号 Order Number

UPT-1.5PE	黄 + 绿 (PE)	3360150
-----------	------------	---------

(1) 端板 End plate



G-UPT-1.5 3360143

G-UPT-1.5 3360143

(2) 插拔式桥接件：用于端子中央实现横向桥接  
 齿背绝缘处可标识可分：2-位、3-位、10-位  
 Insert-pull type bridging component: used  
 to realize crosswise bridging at center of  
 terminal, the mark of rail insulation can be  
 divided into: 2-bit, 3-bit, 10-bit.



FBS2-3.5 337003  
 FBS3-3.5 337010  
 FBS10-3.5 337002

FBS2-3.5 337003  
 FBS3-3.5 337010  
 FBS10-3.5 337002

(3) 螺丝刀 Screwdriver



STF0-0.4x2.5 3010113021

STF0-0.4x2.5 3010113021

(4) 扁平标记条：共 10 条，每条 10 位  
 可嵌入端子外侧标识槽进行标示。  
 Flat mark strip: 10 strips totally, 10 bits  
 per strip, it could be plugged in mark  
 groove of terminal outer side for marking.



ZB3 3010108197

ZB3 3010108197

(5) 标记条：有横向和竖向两种字体，10 位。  
 Mark bar: two character styles,  
 with horizontal and vertical  
 arrangements, ten spaced.



E/3 3010506001

E/3 3010506001

(6) 终端固定件：对端子排终端其固定件作  
 用。标记夹和标记条可卡在它上进行标识。  
 Terminal fixed component: Imposing  
 fixed function on terminal rows's  
 termination the, mark clam pand mark  
 strip can be blocked onto it for marking



# Industrial Distribution Terminal Blocks

## Push-in terminal block

### 工业配电接线端子 - 直插式接线端子



UPT

#### UPT-1.5/2

直插式接线端子 Push-in terminal block

#### UPT-1.5/2PE

直插式接线端子 Push-in terminal block

#### UPT-1.5/2L

直插式接线端子 Push-in terminal block

UPT-1.5/2					UPT-1.5/2PE					UPT-1.5/2L							
厚 / 宽 / 高		3.5/65.4/41.1/42.6			厚 / 宽 / 高		3.5/65.4/41.1/42.6			厚 / 宽 / 高		3.5/65.4/41.1/42.6					
Thickness/Width/Height					Thickness/Width/Height					Thickness/Width/Height							
		刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U			刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U			刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
		Rigid cable	Soft cable	(A)	(V)			Rigid cable	Soft cable	(A)	(V)			Rigid cable	Soft cable	(A)	(V)
AWG:26-14		0.2-1.5	0.2-1.5	16	500	AWG:26-14		0.2-1.5	0.2-1.5			AWG:26-14		0.2-1.5	0.2-1.5	16	500

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
UPT-1.5/2	灰色 (GY) 3360141 蓝色 (BE) 3360171	UPT-1.5/2PE	黄 + 绿 (PE) 3360151	UPT-1.5/2L	灰色 (GY) 3360192
G-UPT-1.5/2	3360157	G-UPT-1.5/2	3360157	G-UPT-1.5/2	3360157
FBS2-3.5	337003	FBS2-3.5	337003	FBS2-3.5	337003
FBS3-3.5	337010	FBS3-3.5	337010	FBS3-3.5	337010
FBS10-3.5	337002	FBS10-3.5	337002	FBS10-3.5	337002
STF0-0.4×2.5	3010113021	STF0-0.4×2.5	3010113021	STF0-0.4×2.5	3010113021
ZB3	3010108197	ZB3	3010108197	ZB3	3010108197
E/3	3010506001	E/3	3010506001	E/3	3010506001

# Industrial Distribution Terminal Blocks

## Push-in terminal block

工业配电接线端子 - 直插式接线端子



UPT

### UPT-1.5/1-2

直插式接线端子 Push-in terminal block

### UPT-1.5/2-2

直插式接线端子 Push-in terminal block

厚 / 宽 / 高	3.5/54.1/30.5/32			
Thickness/Width/Height	mm/mm/mm			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:26-14	0.2-1.5	0.2-1.5	17.5	500

厚 / 宽 / 高	3.5/63.2/30.5/32			
Thickness/Width/Height	mm/mm/mm			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:26-14	0.2-1.5	0.2-1.5	17.5	500

#### 说明 Specification 简图 Schematic Drawing

#### 型号 Model 订货号 Order Number

#### 型号 Model 订货号 Order Number

直插式接线端子：可安装在 NS35 型导轨上  
Push-in terminal block  
Can be installed on tracks NS35 type

UPT-1.5/1-2 灰色 (GY) 3360145

UPT-1.5/2-2  
灰色 (GY) 3360146  
蓝色 (BE) 3360182  
橙色 (OR) 3360188

(1) 端板 End plate



G-UPT-1.5/1-2 3360156

G-UPT-1.5/2-2 3360158

(2) 插拔式桥接件：用于端子中央实现横向桥接  
齿背绝缘处可标识可分：2-位、3-位、10-位  
Insert-pull type bridging component: used  
to realize crosswise bridging at center of  
terminal, the mark of rail insulation can be  
divided into: 2-bit, 3-bit, 10-bit.



FBS2-3.5 337003  
FBS3-3.5 337010  
FBS10-3.5 337002

FBS2-3.5 337003  
FBS3-3.5 337010  
FBS10-3.5 337002

(3) 螺丝刀 Screwdriver



STF0-0.4×2.5 3010113021

STF0-0.4×2.5 3010113021

(4) 扁平标记条：共 10 条，每条 10 位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits  
per strip, it could be plugged in mark  
groove of terminal outer side for marking.



(5) 标记条：有横向和竖向两种字体，10 位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



ZB3 3010108197

ZB3 3010108197

(6) 终端固定件：对端子排终端其固定件作  
用。标记夹和标记条可卡在其上进行标识。  
Terminal fixed component: Imposing  
fixed function on terminal rows's  
termination the mark clamp and mark  
strip can be blocked onto it for marking



E/3 3010506001

E/3 3010506001

# Industrial Distribution Terminal Blocks

## Push-in terminal block

### 工业配电接线端子 - 直插式接线端子



UPT-1.5/2K 直插式接线端子 Push-in terminal block					UPT-1.5/1-2PE 直插式接线端子 Push-in terminal block					UPT-1.5/2-2PE 直插式接线端子 Push-in terminal block					
厚 / 宽 / 高		3.5/86/41.1/42.6			厚 / 宽 / 高		3.5/54.1/30.5/32			厚 / 宽 / 高		3.5/63.2/30.5/32			
Thickness/Width/Height					Thickness/Width/Height					Thickness/Width/Height					
刚性导线 (mm <sup>2</sup> )		柔性导线 (mm <sup>2</sup> )		I	U	刚性导线 (mm <sup>2</sup> )		柔性导线 (mm <sup>2</sup> )		刚性导线 (mm <sup>2</sup> )		柔性导线 (mm <sup>2</sup> )			
Rigid cable		Soft cable		(A)	(V)	Rigid cable		Soft cable		Rigid cable		Soft cable			
AWG:26-14	0.2-1.5	0.2-1.5		9	400	AWG:26-14	0.2-1.5	0.2-1.5			AWG:26-14	0.2-1.5	0.2-1.5		
型号 Model	订货号 Order Number				型号 Model	订货号 Order Number				型号 Model	订货号 Order Number				
UPT-1.5/2K	灰色 (GY)	3360155				UPT-1.5/1-2PE	黄 + 绿 (PE)	3360152				UPT-1.5/2-2PE	黄 + 绿 (PE)	3360153	
G-UPT-1.5/2K	3360160				G-UPT-1.5/1-2	3360156				G-UPT-1.5/2-2	3360158				
FBS2-3.5	337003				FBS2-3.5	337003				FBS2-3.5	337003				
FBS3-3.5	337010				FBS3-3.5	337010				FBS3-3.5	337010				
FBS10-3.5	337002				FBS10-3.5	337002				FBS10-3.5	337002				
STF0-0.4×2.5	3010113021				STF0-0.4×2.5	3010113021				STF0-0.4×2.5	3010113021				
ZB3	3010108197				ZB3	3010108197				ZB3	3010108197				
E/3	3010506001				E/3	3010506001				E/3	3010506001				

UPT

# Industrial Distribution Terminal Blocks

## Push-in terminal block

工业配电接线端子 - 直插式接线端子



UPT

### UPT-1.5/3

直插式接线端子 Push-in terminal block

### UPT-1.5/3L

直插式接线端子 Push-in terminal block

厚 / 宽 / 高	3.5/97.3/51.7/53.2			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:26-14	0.2-1.5	0.2-1.5	15	500

厚 / 宽 / 高	3.5/97.3/51.7/53.2			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:26-14	0.2-1.5	0.2-1.5	15	500

#### 说明 Specification 简图 Schematic Drawing

#### 型号 Model 订货号 Order Number

#### 型号 Model 订货号 Order Number

直插式接线端子：可安装在 NS35 型导轨上  
Push-in terminal block  
Can be installed on tracks NS35 type

UPT-1.5/3 灰色 (GY) 3360149

UPT-1.5/3L 灰色 (GY) 3360191

(1) 端板 End plate



G-UPT-1.5/3 3360161

G-UPT-1.5/3 3360161

(2) 插拔式桥接件：用于端子中央实现横向桥接  
齿背绝缘处可标识可分：2-位、3-位、10-位  
Insert-pull type bridging component: used  
to realize crosswise bridging at center of  
terminal, the mark of rail insulation can be  
divided into: 2-bit, 3-bit, 10-bit.



FBS2-3.5 337003  
FBS3-3.5 337010  
FBS10-3.5 337002

FBS2-3.5 337003  
FBS3-3.5 337010  
FBS10-3.5 337002

(3) 螺丝刀 Screwdriver



STF0-0.4×2.5 3010113021

STF0-0.4×2.5 3010113021

(4) 扁平标记条：共 10 条，每条 10 位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits  
per strip, it could be plugged in mark  
groove of terminal outer side for marking.



(5) 标记条：有横向和竖向两种字体，10 位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



ZB3 3010108197

ZB3 3010108197

(6) 终端固定件：对端子排终端其固定件作  
用。标记夹和标记条可卡在上进行标识。  
Terminal fixed component: Imposing  
fixed function on terminal rows's  
termination the, mark clam pand mark  
strip can be blocked onto it for marking



E/3 3010506001

E/3 3010506001

# Industrial Distribution Terminal Blocks

## Push-in terminal block

工业配电接线端子 - 直插式接线端子



UPT

### UPT-1.5PE/L/L

直插式接线端子 Push-in terminal block

### UPT-1.5PE/L/N

直插式接线端子 Push-in terminal block

### UPT-1.5/3PE

直插式接线端子 Push-in terminal block

厚 / 宽 / 高 / 高	3.5/97.3/51.7/53.2			
Thickness/Width/Height/Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:26-14	0.2-1.5	0.2-1.5	15	500

厚 / 宽 / 高 / 高	3.5/97.3/51.7/53.2			
Thickness/Width/Height/Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:26-14	0.2-1.5	0.2-1.5	15	500

厚 / 宽 / 高 / 高	3.5/97.3/51.7/53.2			
Thickness/Width/Height/Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )			
Rigid cable	Soft cable			
AWG:26-14	0.2-1.5	0.2-1.5		

型号 Model	订货号 Order Number
----------	------------------

型号 Model	订货号 Order Number
----------	------------------

型号 Model	订货号 Order Number
----------	------------------

UPT-1.5PE/L/L	灰色 (GY) 3360193
---------------	-----------------

UPT-1.5PE/L/N	灰色 (GY) 3360194
---------------	-----------------

UPT-1.5/3PE	黄 + 绿 (PE) 3360154
-------------	--------------------

G-UPT-1.5/3	3360161
-------------	---------

G-UPT-1.5/3	3360161
-------------	---------

G-UPT-1.5/3	3360161
-------------	---------

FBS2-3.5	337003
FBS3-3.5	337010
FBS10-3.5	337002

FBS2-3.5	337003
FBS3-3.5	337010
FBS10-3.5	337002

FBS2-3.5	337003
FBS3-3.5	337010
FBS10-3.5	337002

STF0-0.4×2.5	3010113021
--------------	------------

STF0-0.4×2.5	3010113021
--------------	------------

STF0-0.4×2.5	3010113021
--------------	------------

ZB3	3010108197
-----	------------

ZB3	3010108197
-----	------------

ZB3	3010108197
-----	------------

E/3	3010506001
-----	------------

E/3	3010506001
-----	------------

E/3	3010506001
-----	------------



# Industrial Distribution Terminal Blocks

## Pusin-in terminal block

### 工业配电接线端子 - 直插式接线端子



UPT

#### UPT-2.5

直插式接线端子 Push-in terminal block

#### UPT-2.5PE

直插式接线端子 Push-in terminal block

厚 / 宽 / 高	5.2/48.6/35.5/36.8			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:26-12	0.2-4	0.2-4	24	800
最大负载电流: 28A (4mm <sup>2</sup> 刚性导线)				
Maximum load current: 28A(4mm <sup>2</sup> rigid wire)				

厚 / 宽 / 高	5.2/48.6/35.5/36.8			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )			
Rigid cable	Soft cable			
AWG:26-12	0.2-4	0.2-4		

#### 说明 Specification 简图 Schematic Drawing

直插式接线端子: 可安装在 NS35 型导轨上  
Push-in terminal block  
Can be installed on tracks NS35 type

型号 Model	订货号 Order Number
UPT-2.5	灰色 (GY) 3360001
	蓝色 (BE) 3360018
	红色 (RD) 3360123
	灰色 (GY) -M101 3360200

型号 Model	订货号 Order Number
UPT-2.5PE	黄 + 绿 (PE) 3360002

(1) 端板 End plate



G-UPT-2.5 3360008

G-UPT-2.5 3360008

(2) 插拔式桥接件: 用于端子中央实现横向桥接  
齿背绝缘处可标识可分: 2-位、3-位、10-位  
Insert-pull type bridging component: used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit, 3-bit, 10-bit.



JFBS2-2.5	3010503028
JFBS3-2.5	3010503032
JFBS10-2.5	3010503033

JFBS2-2.5	3010503028
JFBS3-2.5	3010503032
JFBS10-2.5	3010503033

(3) 螺丝刀 Screwdriver



STF0-0.4×2.5 3010113021

STF0-0.4×2.5 3010113021

(4) 扁平标记条: 共 10 条, 每条 10 位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.



ZBFM5 3010505002

ZBFM5 3010505002

(5) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



ZB5 3010108003

ZB5 3010108003

(6) 终端固定件: 对端子排终端其固定件作用。标记夹和标记条可卡在上进行标识。  
Terminal fixed component: Imposing fixed function on terminal rows's termination the, mark clam pand mark strip can be blocked onto it for marking



E/3 3010506001

E/3 3010506001

# Industrial Distribution Terminal Blocks

## Pusin-in terminal block

工业配电接线端子 - 直插式接线端子



UPT

UPT-2.5/2 直插式接线端子 Push-in terminal block					UPT-2.5/2-2 直插式接线端子 Push-in terminal block					UPT-2.5/2-2PE 直插式接线端子 Push-in terminal block					
厚 / 宽 / 高 / 高		5.2/68.4/46.1/47.6			厚 / 宽 / 高 / 高		5.2/72.4/35.5/36.8			厚 / 宽 / 高 / 高		5.2/72.4/35.5/36.8			
Thickness/Width/Height/ Height					Thickness/Width/Height/ Height					Thickness/Width/Height/ Height					
刚性导线 (mm <sup>2</sup> )		柔性导线 (mm <sup>2</sup> )		I	U	刚性导线 (mm <sup>2</sup> )		柔性导线 (mm <sup>2</sup> )		I	U	刚性导线 (mm <sup>2</sup> )		柔性导线 (mm <sup>2</sup> )	
Rigid cable		Soft cable		(A)	(V)	Rigid cable		Soft cable		(A)	(V)	Rigid cable		Soft cable	
AWG:26-12	0.2-4	0.2-4		24	800	AWG:26-12	0.2-4	0.2-4		24	800	AWG:26-12	0.2-4	0.2-4	
最大负载电流: 26A (4mm <sup>2</sup> 刚性导线) Maximum load current: 26A(4mm <sup>2</sup> rigid wire)					最大负载电流: 28A (4mm <sup>2</sup> 刚性导线) Maximum load current: 28A(4mm <sup>2</sup> rigid wire)										
型号 Model	订货号 Order	Number			型号 Model	订货号 Order	Number			型号 Model	订货号 Order	Number			
UPT-2.5/2	灰色 (GY)	3360005			UPT-2.5/2-2	灰色 (GY)	3360006			UPT-2.5/2-2PE	黄 + 绿 (PE)	3360007			
	蓝色 (BE)	3360119				红色 (RD)	3360125								
	红色 (RD)	3360124				橙色 (OR)	3360159								
	灰色 (GY) -M101	3360215				蓝色 (BE)	3360091								
G-UPT-2.5/2	3360010			G-UPT-2.5/2-2	3360011			G-UPT-2.5/2-2	3360011						
JFBS2-2.5	3010503028			JFBS2-2.5	3010503028			JFBS2-2.5	3010503028						
JFBS3-2.5	3010503032			JFBS3-2.5	3010503032			JFBS3-2.5	3010503032						
JFBS10-2.5	3010503033			JFBS10-2.5	3010503033			JFBS10-2.5	3010503033						
STF0-0.4×2.5	3010113021			STF0-0.4×2.5	3010113021			STF0-0.4×2.5	3010113021						
ZBFM5	3010505002			ZBFM5	3010505002			ZBFM5	3010505002						
ZB5	3010108003			ZB5	3010108003			ZB5	3010108003						
E/3	3010506001			E/3	3010506001			E/3	3010506001						

# Industrial Distribution Terminal Blocks

## Push-in terminal block

工业配电接线端子 - 直插式接线端子



UPT

### UPT-2.5/2PE

直插式接线端子 Push-in terminal block

### UPT-2.5/2L

直插式接线端子 Push-in terminal block

厚 / 宽 / 高	5.2/68.4/46.1/47.6	
Thickness/Width/Height/	Height	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	
Rigid cable	Soft cable	
AWG:26-12	0.2-4	0.2-4

厚 / 宽 / 高	5.2/68.4/46.1/47.6		
Thickness/Width/Height/	Height		
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
Rigid cable	Soft cable	(A)	(V)
AWG:26-12	0.2-4	0.2-4	24 800
最大负载电流: 26A (4mm <sup>2</sup> 刚性导线)			
Maximum load current: 26A(4mm <sup>2</sup> rigid wire)			

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
直插式接线端子: 可安装在 NS35 型导轨上 Push-in terminal block Can be installed on tracks NS35 type		UPT-2.5/2PE	黄 + 绿 (PE) 3360201	UPT-2.5/2L	灰色 (GY) 3360186
(1) 端板 End plate		G-UPT-2.5/2	3360010	G-UPT-2.5/2	3360010
(2) 插拔式桥接件: 用于端子中央实现横向桥接 齿背绝缘处可标识可分: 2-位、3-位、10-位 Insert-pull type bridging component: used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit, 3-bit, 10-bit.		JFBS2-2.5 JFBS3-2.5 JFBS10-2.5	3010503028 3010503032 3010503033	JFBS2-2.5 JFBS3-2.5 JFBS10-2.5	3010503028 3010503032 3010503033
(3) 螺丝刀 Screwdriver		STF0-0.4×2.5	3010113021	STF0-0.4×2.5	3010113021
(4) 扁平标记条: 共 10 条, 每条 10 位 可嵌入端子外侧标识槽进行标示。 Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.		ZBFM5	3010505002	ZBFM5	3010505002
(5) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		ZB5	3010108003	ZB5	3010108003
(6) 终端固定件: 对端子排终端其固定件作 用。标记夹和标记条可卡在它上进行标识。 Terminal fixed component: imposing fixed function on terminal rows's termination the, mark clam pand mark strip can be blocked onto it for marking		E/3	3010506001	E/3	3010506001

# Industrial Distribution Terminal Blocks

## Push-in terminal block

工业配电接线端子 - 直插式接线端子



UPT

### UPT-2.5/3PE

直插式接线端子 Push-in terminal block

厚 / 宽 / 高 / 高	5.2/102.2/56.5/58	
Thickness/Width/Height/ Height		
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	
Rigid cable	Soft cable	
AWG:26-12	0.2-4	0.2-4

### UPT-2.5/3

直插式接线端子 Push-in terminal block

厚 / 宽 / 高 / 高	5.2/102.2/56.5/58		
Thickness/Width/Height/ Height			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
Rigid cable	Soft cable	(A)	(V)
AWG:26-12	0.2-4	0.2-4	20 500
最大负载电流: 24A (4mm <sup>2</sup> 刚性导线)			
Maximum load current: 24A(4mm <sup>2</sup> rigid wire)			

### UPT-2.5-PE/3L

直插式接线端子 Push-in terminal block

厚 / 宽 / 高 / 高	5.2/99.4/91.1/92.6		
Thickness/Width/Height/ Height			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
Rigid cable	Soft cable	(A)	(V)
AWG:26-12	0.2-4	0.2-4	20 500

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
UPT-2.5/3	黄 + 绿 (PE) 3360116	UPT-2.5/3	灰色 (GY) 3360115	UPT-2.5/3	灰色 (GY) 3360198
G-UPT-2.5/3	3360148	G-UPT-2.5/3	3360148	G-UPT-2.5/3	3360148
JFBS2-2.5	3010503028	JFBS2-2.5	3010503028	JFBS2-2.5	3010503028
JFBS3-2.5	3010503032	JFBS3-2.5	3010503032	JFBS3-2.5	3010503032
JFBS10-2.5	3010503033	JFBS10-2.5	3010503033	JFBS10-2.5	3010503033
STF0-0.4×2.5	3010113021	STF0-0.4×2.5	3010113021	STF0-0.4×2.5	3010113021
ZBFM5	3010505002	ZBFM5	3010505002	ZBFM5	3010505002
ZB5	3010108003	ZB5	3010108003	ZB5	3010108003
E/3	3010506001	E/3	3010506001	E/3	3010506001

# Industrial Distribution Terminal Blocks

## Pusin-in terminal block

工业配电接线端子 - 直插式接线端子



UPT

### UPT-2.5/3L 直插式接线端子 Push-in terminal block

### UPT-2.5/1-2K 直插式接线端子 Push-in terminal block

厚 / 宽 / 高 / 高	5.2/102.2/56.5/58			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:26-12	0.2-4	0.2-4	20	500
最大负载电流: 24A (4mm <sup>2</sup> 刚性导线)				
Maximum load current: 24A(4mm <sup>2</sup> rigid wire)				

厚 / 宽 / 高 / 高	5.2/73.7/35.5/36.8			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:26-12	0.2-4	0.2-4	20	400
最大负载电流: 20A (2.5mm <sup>2</sup> 刚性导线)				
Maximum load current: 20A(2.5mm <sup>2</sup> rigid wire)				

#### 说明 Specification 简图 Schematic Drawing

直插式接线端子: 可安装在 NS35 型导轨上  
Push-in terminal block  
Can be installed on tracks NS35 type

#### 型号 Model 订货号 Order Number

UPT-2.5/3L 灰色 (GY) 3360195

#### 型号 Model 订货号 Order Number

UPT-2.5/1-2K 灰色 (GY) 3360166

(1) 端板 End plate



G-UPT-2.5/3 3360148

G-UPT-2.5/1-2K 3360218

(2) 插拔式桥接件: 用于端子中央实现横向桥接  
齿背绝缘处可标识分: 2-位、3-位、10-位  
Insert-pull type bridging component: used  
to realize crosswise bridging at center of  
terminal, the mark of rail insulation can be  
divided into: 2-bit, 3-bit, 10-bit.



JFBS2-2.5 3010503028  
JFBS3-2.5 3010503032  
JFBS10-2.5 3010503033

JFBS2-2.5 3010503028  
JFBS3-2.5 3010503032  
JFBS10-2.5 3010503033

(3) 螺丝刀 Screwdriver



STF0-0.4×2.5 3010113021

STF0-0.4×2.5 3010113021

(4) 扁平标记条: 共 10 条, 每条 10 位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits  
per strip, it could be plugged in mark  
groove of terminal outer side for marking.



ZBFM5 3010505002

ZBFM5 3010505002

(5) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



ZB5 3010108197

ZB5 3010108003

(6) 终端固定件: 对端子排终端其固定件作  
用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing  
fixed function on terminal rows's  
termination the, mark clam pand mark  
strip can be blocked onto it for marking



E/3 3010506001

E/3 3010506001

# Industrial Distribution Terminal Blocks

## Push-in terminal block

工业配电接线端子 - 直插式接线端子



UPT

### UPT-2.5/K

直插式接线端子 Push-in terminal block

厚 / 宽 / 高 / 高	5.2/61.9/35.3/36.8			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:26-12	0.2-4	0.2-4	20	400
最大负载电流: 20A (2.5mm <sup>2</sup> 刚性导线)				
Maximum load current: 20A(2.5mm <sup>2</sup> rigid wire)				

### UPT-2.5/1P

直插式接线端子 Push-in terminal block

厚 / 宽 / 高 / 高	5.2/48.6/35.5/36.8			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:26-12	0.2-4	0.2-4	24	500
最大负载电流: 24A (4mm <sup>2</sup> 刚性导线)				
Maximum load current: 24A(4mm <sup>2</sup> rigid wire)				

### UPP-H2.5

直插式接线端子 Push-in terminal block

厚 / 宽 / 高 / 高	5.2/16/40.2			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:26-12	0.2-4	0.2-2.5	24	500
最大负载电流: 24A (4mm <sup>2</sup> 刚性导线)				
Maximum load current: 24A(4mm <sup>2</sup> rigid wire)				

型号 Model	订货号 Order Number
UPT-2.5/K	灰色 (GY) 3360162

型号 Model	订货号 Order Number
UPT-2.5/1P	灰色 (GY) 3360131

型号 Model	订货号 Order Number
UPP-H2.5	灰色 (GY) 3360130

单件件: 两面凹接口设计, 可单个使用

G-UPT-2.5K	3360219
JFBS2-2.5	3010503028
JFBS3-2.5	3010503032
JFBS10-2.5	3010503033

G-UPT-2.5/1P	3360132
JFBS2-2.5	3010503028
JFBS3-2.5	3010503032
JFBS10-2.5	3010503033

STF0-0.4×2.5	3010113021
--------------	------------

STF0-0.4×2.5	3010113021
--------------	------------

ZBFM5	3010505002
-------	------------

ZBFM5	3010505002
-------	------------

ZB5	3010108003
-----	------------

ZB5	3010108003
-----	------------

E/3	3010506001
-----	------------

E/3	3010506001
-----	------------



### UPP-H2.5/N

直插式接线端子 Push-in terminal block

厚 / 宽 / 高 / 高	5.2/16/40.2			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
0.2-4	0.2-2.5	24	500	
最大负载电流: 24A (4mm <sup>2</sup> 刚性导线)				
Maximum load current: 24A(4mm <sup>2</sup> rigid wire)				

型号 Model	订货号 Order Number
----------	------------------

组合件: 一面凸口, 一面凹口, 搭配单件件组合使用

# Industrial Distribution Terminal Blocks

## Push-in terminal block

工业配电接线端子 - 直插式接线端子



UPT

### UPT-2.5/1-2

直插式接线端子 Push-in terminal block

### UPT-2.5/1-2PE

直插式接线端子 Push-in terminal block

UPT-2.5/1-2				UPT-2.5/1-2PE			
厚 / 宽 / 高		5.2/60.4/35.5/36.8		厚 / 宽 / 高		5.2/60.4/35.5/36.8	
Thickness/Width/Height		mm/mm/mm		Thickness/Width/Height		mm/mm/mm	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
Rigid cable	Soft cable	(A)	(V)	Rigid cable	Soft cable	(A)	(V)
AWG:26-12	0.2-4	0.2-4	24 800	AWG:26-12	0.2-4	0.2-4	
最大负载电流: 28A (4mm <sup>2</sup> 刚性导线)							
Maximum load current: 28A(4mm <sup>2</sup> rigid wire)							

#### 说明 Specification 简图 Schematic Drawing

直插式接线端子: 可安装在 NS35 型导轨上  
Push-in terminal block  
Can be installed on tracks NS35 type

#### 型号 Model 订货号 Order Number

UPT-2.5/1-2 灰色 (GY) 3360163

#### 型号 Model 订货号 Order Number

UPT-2.5/1-2PE 灰色 (GY) 3360202

(1) 端板 End plate



G-UPT-2.5/1-2 3360220

G-UPT-2.5/1-2 3360220

(2) 插拔式桥接件: 用于端子中央实现横向桥接  
齿背绝缘处可标识可分: 2-位、3-位、10-位  
Insert-pull type bridging component: used  
to realize crosswise bridging at center of  
terminal, the mark of rail insulation can be  
divided into: 2-bit, 3-bit, 10-bit.



JFBS2-2.5 3010503028  
JFBS3-2.5 3010503032  
JFBS10-2.5 3010503033

JFBS2-2.5 3010503028  
JFBS3-2.5 3010503032  
JFBS10-2.5 3010503033

(3) 螺丝刀 Screwdriver



STF0-0.4×2.5 3010113021

STF0-0.4×2.5 3010113021

(4) 扁平标记条: 共 10 条, 每条 10 位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits  
per strip, it could be plugged in mark  
groove of terminal outer side for marking.



ZBFM5 3010505002

ZBFM5 3010505002

(5) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



ZB5 3010108197

ZB5 3010108003

(6) 终端固定件: 对端子排终端其固定件作  
用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing  
fixed function on terminal rows's  
termination the, mark clam pand mark  
strip can be blocked onto it for marking



E/3 3010506001

E/3 3010506001

# Industrial Distribution Terminal Blocks

## Push-in terminal block

工业配电接线端子 - 直插式接线端子



UPT

UPT-2.5PE/L/L 直插式接线端子 Push-in terminal block					UPT-2.5PE/L/N 直插式接线端子 Push-in terminal block					UPT-4 直插式接线端子 Push-in terminal block					
厚 / 宽 / 高 / 高		5.2/102.2/56.5/58			厚 / 宽 / 高 / 高		5.2/102.2/56.5/58			厚 / 宽 / 高 / 高		6.2/55.8/35.3/36.8			
Thickness/Width/Height/ Height					Thickness/Width/Height/ Height					Thickness/Width/Height/ Height					
刚性导线 (mm <sup>2</sup> )		柔性导线 (mm <sup>2</sup> )		I	U	刚性导线 (mm <sup>2</sup> )		柔性导线 (mm <sup>2</sup> )		刚性导线 (mm <sup>2</sup> )		柔性导线 (mm <sup>2</sup> )		I	U
Rigid cable		Soft cable		(A)	(V)	Rigid cable		Soft cable		Rigid cable		Soft cable		(A)	(V)
AWG:26-12	0.2-4	0.2-4		20	500	AWG:26-12	0.2-4	0.2-4		无电气参数		AWG:24-10	0.2-6	0.2-6	
最大负载电流: 26A (4mm <sup>2</sup> 刚性导线)					最大负载电流: 24A (4mm <sup>2</sup> 刚性导线)					最大负载电流: 36A (6mm <sup>2</sup> 刚性导线)					
Maximum load current: 26A(4mm <sup>2</sup> rigid wire)					Maximum load current: 24A(4mm <sup>2</sup> rigid wire)					Maximum load current: 36A(6mm <sup>2</sup> rigid wire)					
型号 Model	订货号 Order		Number		型号 Model	订货号 Order		Number		型号 Model	订货号 Order		Number		
UPT-2.5PE/L/L	灰色 (GY)		3360196		UPT-2.5PE/L/N	灰色 (GY)		3360197		UPT-4	灰色 (GY)		3360003		
											蓝色 (BE)		3360114		
											红色 (RD)		3360126		
											灰色 (GY) -M101		3360213		
G-UPT-2.5/3	3360148				G-UPT-2.5/3	3360148				G-UPT-4	3360009				
JFBS2-2.5	3010503028				JFBS2-2.5	3010503028				JFBS2-4	3010503034				
JFBS3-2.5	3010503032				JFBS3-2.5	3010503032				JFBS3-4	3010503035				
JFBS10-2.5	3010503033				JFBS10-2.5	3010503033				JFBS10-4	3010503036				
STF0-0.4×2.5	3010113021				STF0-0.4×2.5	3010113021				STF2-0.8×4	3010113025				
ZBFM5	3010505002				ZBFM5	3010505002				ZBFM6	3010505003				
ZB5	3010108003				ZB5	3010108003				ZB6	3010108002				
E/3	3010506001				E/3	3010506001				E/3	3010506001				



# Industrial Distribution Terminal Blocks

## Push-in terminal block

### 工业配电接线端子 - 直插式接线端子



UPT

#### UPT-4PE

直插式接线端子 Push-in terminal block

#### UPT-4/1-2

直插式接线端子 Push-in terminal block

UPT-4PE			UPT-4/1-2			
直插式接线端子 Push-in terminal block			直插式接线端子 Push-in terminal block			
厚 / 宽 / 高	高		厚 / 宽 / 高	高		
Thickness/Width/Height	Height		Thickness/Width/Height	Height		
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )		刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I U
	Rigid cable	Soft cable		Rigid cable	Soft cable	(A) (V)
AWG:24-10	0.2-6	0.2-6	AWG:24-10	0.2-6	0.2-6	32 800
取决于 6mm <sup>2</sup> 刚性导线的最大负载电流 Depends on the maximum load current of 6mm <sup>2</sup> rigid wire			最大负载电流: 36A (6mm <sup>2</sup> 刚性导线) Maximum load current: 36A(6mm <sup>2</sup> rigid wire)			

#### 说明 Specification 简图 Schematic Drawing

直插式接线端子：可安装在 NS35 型导轨上  
Push-in terminal block  
Can be installed on tracks NS35 type

#### 型号 Model 订货号 Order Number

UPT-4PE 黄 + 绿 (PE) 3360004

#### 型号 Model 订货号 Order Number

UPT-4/1-2 灰色 (GY) 3360203

(1) 端板 End plate



G-UPT-4 3360009

G-UPT-4/1-2 3360221

(2) 插拔式桥接件：用于端子中央实现横向桥接  
齿背绝缘处可标识可分：2-位、3-位、10-位  
Insert-pull type bridging component: used  
to realize crosswise bridging at center of  
terminal, the mark of rail insulation can be  
divided into: 2-bit, 3-bit, 10-bit.



JFBS2-4 3010503034  
JFBS3-4 3010503035  
JFBS10-4 3010503036

JFBS2-4 3010503034  
JFBS3-4 3010503035  
JFBS10-4 3010503036

(3) 螺丝刀 Screwdriver



STF2-0.8x4 3010113025

STF2-0.8x4 3010113025

(4) 扁平标记条：共 10 条，每条 10 位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits  
per strip, it could be plugged in mark  
groove of terminal outer side for marking.



ZBFM6 3010505003

ZBFM6 3010505003

(5) 标记条：有横向和竖向两种字体，10 位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



ZB6 3010108002

ZB6 3010108002

(6) 终端固定件：对端子排终端其固定件作  
用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing  
fixed function on terminal rows's  
termination the, mark clam pand mark  
strip can be blocked onto it for marking




E/3 3010506001

E/3 3010506001

# Industrial Distribution Terminal Blocks

## Push-in terminal block

工业配电接线端子 - 直插式接线端子



UPT-4/1-2PE 直插式接线端子 Push-in terminal block			UPT-4/2 直插式接线端子 Push-in terminal block					UPT-4/2L 直插式接线端子 Push-in terminal block				
厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height			厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height					厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) Rigid cable Soft cable			刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) I U Rigid cable Soft cable (A) (V)					刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) I U Rigid cable Soft cable (A) (V)				
AWG:24-10 0.2-6 0.2-6			AWG:24-10 0.2-6 0.2-6 28 500					AWG:24-10 0.2-6 0.2-6 30 500				
最大负载电流: 32A (6mm <sup>2</sup> 刚性导线) Maximum load current: 32A(6mm <sup>2</sup> rigid wire)			最大负载电流: 32A (6mm <sup>2</sup> 刚性导线) Maximum load current: 32A(6mm <sup>2</sup> rigid wire)					最大负载电流: 32A (6mm <sup>2</sup> 刚性导线) Maximum load current: 32A(6mm <sup>2</sup> rigid wire)				
型号 Model	订货号 Order	Number	型号 Model	订货号 Order	Number	型号 Model	订货号 Order	Number	型号 Model	订货号 Order	Number	
UPT-4/1-2PE	灰色 (GY)	3360204	UPT-4/2	灰色 (GY)	3360117	UPT-4/2L	灰色 (GY)	3360199				
G-UPT-4/1-2		3360221	G-UPT-4/2		3360147	G-UPT-4/2		3360147				
JFBS2-4		3010503034	JFBS2-4		3010503034	JFBS2-4		3010503034				
JFBS3-4		3010503035	JFBS3-4		3010503035	JFBS3-4		3010503035				
JFBS10-4		3010503036	JFBS10-4		3010503036	JFBS10-4		3010503036				
STF2-0.8×4		3010113025	STF2-0.8×4		3010113025	STF2-0.8×4		3010113025				
ZBFM6		3010505003	ZBFM6		3010505003	ZBFM6		3010505003				
ZB6		3010108002	ZB6		3010108002	ZB6		3010108002				
E/3		3010506001	E/3		3010506001	E/3		3010506001				

UPT

# Industrial Distribution Terminal Blocks

## Pusin-in terminal block

工业配电接线端子 - 直插式接线端子



UPT

### UPT-4/2PE

直插式接线端子 Push-in terminal block

### UPT-4/2-2

直插式接线端子 Push-in terminal block

UPT-4/2PE			UPT-4/2-2			
直插式接线端子 Push-in terminal block			直插式接线端子 Push-in terminal block			
厚 / 宽 / 高	高		厚 / 宽 / 高	高		
Thickness/Width/Height/	Height		Thickness/Width/Height/	Height		
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )		刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I U
	Rigid cable	Soft cable		Rigid cable	Soft cable	(A) (V)
AWG:24-10	0.2-6	0.2-6	AWG:24-10	0.2-6	0.2-6	32 800
最大负载电流: 36A (6mm <sup>2</sup> 刚性导线)						
Maximum load current: 36A(6mm <sup>2</sup> rigid wire)						

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
直插式接线端子: 可安装在 NS35 型导轨上 Push-in terminal block Can be installed on tracks NS35 type		UPT-4/2PE	灰色 (GY) 3360118	UPT-4/2-2	灰色 (GY) 3360101 蓝色 (BE) 3360122 红色 (RD) 3360129
(1) 端板 End plate		G-UPT-4/2	3360147	G-UPT-4/2-2	3360055
(2) 插拔式桥接件: 用于端子中央实现横向桥接 齿背绝缘处可标识可分: 2-位、3-位、10-位 Insert-pull type bridging component: used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit, 3-bit, 10-bit.		JFBS2-4 JFBS3-4 JFBS10-4	3010503034 3010503035 3010503036	JFBS2-4 JFBS3-4 JFBS10-4	3010503034 3010503035 3010503036
(3) 螺丝刀 Screwdriver		STF2-0.8×4	3010113025	STF2-0.8×4	3010113025
(4) 扁平标记条: 共 10 条, 每条 10 位 可嵌入端子外侧标识槽进行标示。 Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.		ZBFM6	3010505003	ZBFM6	3010505003
(5) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		ZB6	3010108002	ZB6	3010108002
(6) 终端固定件: 对端子排终端其固定件作 用。标记夹和标记条可卡在它上进行标识。 Terminal fixed component: Imposing fixed function on terminal rows's termination the, mark clam pand mark strip can be blocked onto it for marking		E/3	3010506001	E/3	3010506001

# Industrial Distribution Terminal Blocks

## Push-in terminal block

工业配电接线端子 - 直插式接线端子



### UPT-4/2-2PE

直插式接线端子 Push-in terminal block

### UPT-4RD

直插式接线端子 Push-in terminal block

### UPT-4RD/LED24

直插式接线端子 Push-in terminal block

UPT

UPT-4/2-2PE			UPT-4RD				UPT-4RD/LED24					
直插式接线端子 Push-in terminal block			直插式接线端子 Push-in terminal block				直插式接线端子 Push-in terminal block					
厚 / 宽 / 高 / 高			厚 / 宽 / 高 / 高				厚 / 宽 / 高 / 高					
Thickness/Width/Height/ Height			Thickness/Width/Height/ Height				Thickness/Width/Height/ Height					
刚性导线 (mm <sup>2</sup> )		柔性导线 (mm <sup>2</sup> )	刚性导线 (mm <sup>2</sup> )		柔性导线 (mm <sup>2</sup> )	I	U	刚性导线 (mm <sup>2</sup> )		柔性导线 (mm <sup>2</sup> )	I	U
Rigid cable		Soft cable	Rigid cable		Soft cable	(A)	(V)	Rigid cable		Soft cable	(A)	(V)
AWG:24-10	0.2-6	0.2-6	AWG:24-10	0.2-6	0.2-6	6.3	500	AWG:24-10	0.2-6	0.2-6	6.3	24
最大负载电流: 6.3A (6mm <sup>2</sup> 刚性导线)			最大负载电流: 6.3A (6mm <sup>2</sup> 刚性导线)				最大负载电流: 6.3A (6mm <sup>2</sup> 刚性导线)					
Maximum load current: 6.3A(6mm <sup>2</sup> rigid wire)			Maximum load current: 6.3A(6mm <sup>2</sup> rigid wire)				Maximum load current: 6.3A(6mm <sup>2</sup> rigid wire)					

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
UPT-4/2-2PE	黄 + 绿 (PE) 3360054	UPT-4RD	黑色 (BK) 3360102	UPT-4RD/LED24	黑色 (BK) 3360100
G-UPT-4/2-2	3360055	G-UPT-4RD	3360108	G-UPT-4RD	3360108
JFBS2-4	3010503034	JFBS2-4	3010503034	JFBS2-4	3010503034
JFBS3-4	3010503035	JFBS3-4	3010503035	JFBS3-4	3010503035
JFBS10-4	3010503036	JFBS10-4	3010503036	JFBS10-4	3010503036
STF2-0.8×4	3010113025	STF2-0.8×4	3010113025	STF2-0.8×4	3010113025
ZBFM6	3010505003	ZBFM6	3010505003	ZBFM6	3010505003
ZB6	3010108002	ZB6	3010108002	ZB6	3010108002
E/3	3010506001	E/3	3010506001	E/3	3010506001

# Industrial Distribution Terminal Blocks

## Push-in terminal block

### 工业配电接线端子 - 直插式接线端子



UPT

#### UPT-4RD/LED60

直插式接线端子 Push-in terminal block

#### UPT-4RD/LA250

直插式接线端子 Push-in terminal block

厚 / 宽 / 高	6.2/55.8/63.3/ 64.8			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:24-10	0.2-6	0.2-6	6.3	60
最大负载电流: 6.3A (6mm <sup>2</sup> 刚性导线)				
Maximum load current: 6.3A(6mm <sup>2</sup> rigid wire)				

厚 / 宽 / 高	6.2/55.8/63.3/ 64.8			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:24-10	0.2-6	0.2-6	6.3	250
最大负载电流: 6.3A (6mm <sup>2</sup> 刚性导线)				
Maximum load current: 6.3A(6mm <sup>2</sup> rigid wire)				

#### 说明 Specification 简图 Schematic Drawing

直插式接线端子: 可安装在 NS35 型导轨上  
Push-in terminal block  
Can be installed on tracks NS35 type

#### 型号 Model 订货号 Order Number

UPT-4RD/LED60 黑色 (BK) 3360181

#### 型号 Model 订货号 Order Number

UPT-4RD/LA250 黑色 (BK) 3360174

(1) 端板 End plate



G-UPT-4RD 3360108

G-UPT-4RD 3360108

(2) 插拔式桥接件: 用于端子中央实现横向桥接  
齿背绝缘处可标识可分: 2-位、3-位、10-位  
Insert-pull type bridging component: used  
to realize crosswise bridging at center of  
terminal, the mark of rail insulation can be  
divided into: 2-bit, 3-bit, 10-bit.



JFBS2-4 3010503034  
JFBS3-4 3010503035  
JFBS10-4 3010503036

JFBS2-4 3010503034  
JFBS3-4 3010503035  
JFBS10-4 3010503036

(3) 螺丝刀 Screwdriver



STF2-0.8×4 3010113025

STF2-0.8×4 3010113025

(4) 扁平标记条: 共 10 条, 每条 10 位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits  
per strip, it could be plugged in mark  
groove of terminal outer side for marking.



ZBFM6 3010505003

ZBFM6 3010505003

(5) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



ZB6 3010108002

ZB6 3010108002

(6) 终端固定件: 对端子排终端其固定件作  
用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing  
fixed function on terminal rows's  
termination the, mark clam pand mark  
strip can be blocked onto it for marking



E/3 3010506001

E/3 3010506001

# Industrial Distribution Terminal Blocks

## Pusin-in terminal block

工业配电接线端子 - 直插式接线端子



UPT

### UPT-4RD/C

直插式接线端子 Push-in terminal block

厚 / 宽 / 高 / 高	8.2/67.8/41.5/43			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:24-10	0.2-6	0.2-6	6.3	500
最大负载电流: 6.3A (6mm <sup>2</sup> 刚性导线)				
Maximum load current: 6.3A(6mm <sup>2</sup> rigid wire)				

### UPT-4RD/C/LA250

直插式接线端子 Push-in terminal block

厚 / 宽 / 高 / 高	8.2/67.8/41.5/43			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:24-10	0.2-6	0.2-6	6.3	250
最大负载电流: 6.3A (6mm <sup>2</sup> 刚性导线)				
Maximum load current: 6.3A(6mm <sup>2</sup> rigid wire)				

### UPT-4RD/C/LED24

直插式接线端子 Push-in terminal block

厚 / 宽 / 高 / 高	8.2/67.8/41.5/43			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:24-10	0.2-6	0.2-6	6.3	24
最大负载电流: 6.3A (6mm <sup>2</sup> 刚性导线)				
Maximum load current: 6.3A(6mm <sup>2</sup> rigid wire)				

型号 Model 订货号 Order Number

UPT-4RD/C 黑色 (BK) 3360167

G-UPT-4RD/C 3360187

STF2-0.8×4 3010113025

ZBFM6 3010505003

ZB6 3010108002

E/3 3010506001

型号 Model 订货号 Order Number

UPT-4RD/C/LA250 黑色 (BK) 3360168

G-UPT-4RD/C 3360187

STF2-0.8×4 3010113025

ZBFM6 3010505003

ZB6 3010108002

E/3 3010506001

型号 Model 订货号 Order Number

UPT-4RD/C/LED24 黑色 (BK) 3360169

G-UPT-4RD/C 3360187

STF2-0.8×4 3010113025

ZBFM6 3010505003

ZB6 3010108002

E/3 3010506001

# Industrial Distribution Terminal Blocks

## Push-in terminal block

### 工业配电接线端子 - 直插式接线端子



UPT

#### UPT-4RD/C/LED60

直插式接线端子 Push-in terminal block

#### UPT-6

直插式接线端子 Push-in terminal block

厚 / 宽 / 高	8.2/67.8/41.5/43			
Thickness/Width/Height	mm/mm/mm			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:24-10	0.2-6	0.2-6	6.3	60
最大负载电流: 6.3A (6mm <sup>2</sup> 刚性导线)				
Maximum load current: 6.3A(6mm <sup>2</sup> rigid wire)				

厚 / 宽 / 高	8.2/57.7/42.2/43.7			
Thickness/Width/Height	mm/mm/mm			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:20-8	0.5-10	0.5-10	41	1000
最大负载电流: 52A (6mm <sup>2</sup> 刚性导线)				
Maximum load current: 52A(6mm <sup>2</sup> rigid wire)				

#### 说明 Specification 简图 Schematic Drawing

直插式接线端子: 可安装在 NS35 型导轨上  
Push-in terminal block  
Can be installed on tracks NS35 type

#### 型号 Model 订货号 Order Number

UPT-4RD/C/LED60	黑色 (BK)	3360170
-----------------	---------	---------

#### 型号 Model 订货号 Order Number

UPT-6	灰色 (GY)	3360012
	蓝色 (BE)	3360120
	红色 (RD)	3360127

(1) 端板 End plate



G-UPT-4RD/C	3360187
-------------	---------

G-UPT-6	3360016
---------	---------

(2) 插拔式桥接件: 用于端子中央实现横向桥接  
齿背绝缘处可标识可分: 2-位、3-位、10-位  
Insert-pull type bridging component: used  
to realize crosswise bridging at center of  
terminal, the mark of rail insulation can be  
divided into: 2-bit, 3-bit, 10-bit.



JFBS2-6	3010503037
JFBS3-6	3010503042
JFBS4-6	3010503068
JFBS5-6	3010503116
JFBS10-6	3010503048

JFBS2-6	3010503037
JFBS3-6	3010503042
JFBS4-6	3010503068
JFBS5-6	3010503116
JFBS10-6	3010503048

(3) 螺丝刀 Screwdriver



STF2-0.8×4	3010113025
------------	------------

STF2-0.8×4	3010113025
------------	------------

(4) 扁平标记条: 共 10 条, 每条 10 位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits  
per strip, it could be plugged in mark  
groove of terminal outer side for marking.



ZBFM6	3010505003
-------	------------

ZBFM8	3010505004
-------	------------

(5) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



ZB6	3010108002
-----	------------

ZB8	3010108004
-----	------------

(6) 终端固定件: 对端子排终端其固定件作  
用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing  
fixed function on terminal rows's  
termination the mark clam pand mark  
strip can be blocked onto it for marking



E/3	3010506001
-----	------------

E/3	3010506001
-----	------------

# Industrial Distribution Terminal Blocks

## Pusin-in terminal block

工业配电接线端子 - 直插式接线端子



UPT

### UPT-6PE

直插式接线端子 Push-in terminal block

### UPT-6/1-2

直插式接线端子 Push-in terminal block

### UPT-6/1-2PE

直插式接线端子 Push-in terminal block

厚 / 宽 / 高 / 高	8.2/57.7/42.2/43.7	
Thickness/Width/Height/ Height		
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	
Rigid cable	Soft cable	
AWG:20-8	0.5-10	0.5-10

厚 / 宽 / 高 / 高	8.2/74.1/42.2/43.7	
Thickness/Width/Height/ Height		
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I U
Rigid cable	Soft cable	(A) (V)
AWG:20-8	0.5-10	0.5-10 41 1000

厚 / 宽 / 高 / 高	8.2/74.1/42.2/43.7	
Thickness/Width/Height/ Height		
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	
Rigid cable	Soft cable	
AWG:20-8	0.5-10	0.5-10

最大负载电流: 52A (10mm<sup>2</sup> 刚性导线)  
Maximum load current: 52A(10mm<sup>2</sup> rigid wire)



型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
UPT-6PE	黄 + 绿 (PE) 3360013	UPT-6/1-2	灰色 (GY) 3360112	UPT-6/1-2PE	黄 + 绿 (PE) 3360113
G-UPT-6	3360016	G-UPT-6/1-2	3360144	G-UPT-6/1-2	3360144
JFBS2-6	3010503037	JFBS2-6	3010503037	JFBS2-6	3010503037
JFBS3-6	3010503042	JFBS3-6	3010503042	JFBS3-6	3010503042
JFBS4-6	3010503068	JFBS4-6	3010503068	JFBS4-6	3010503068
JFBS5-6	3010503116	JFBS5-6	3010503116	JFBS5-6	3010503116
JFBS10-6	3010503048	JFBS10-6	3010503048	JFBS10-6	3010503048
STF2-0.8×4	3010113025	STF2-0.8×4	3010113025	STF2-0.8×4	3010113025
ZBFM8	3010505004	ZBFM8	3010505004	ZBFM8	3010505004
ZB8	3010108004	ZB8	3010108004	ZB8	3010108004
E/3	3010506001	E/3	3010506001	E/3	3010506001



# Industrial Distribution Terminal Blocks

## Pusin-in terminal block

### 工业配电接线端子 - 直插式接线端子



UPT

#### UPT-6/2-2

直插式接线端子 Push-in terminal block

#### UPT-6/2-2PE

直插式接线端子 Push-in terminal block

厚 / 宽 / 高 8.2/90.5/42.2/43.7  
 Thickness/Width/Height/ Height  
 刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>) I U  
 Rigid cable Soft cable (A) (V)  
 AWG:20-8 0.5-10 0.5-10 41 1000  
 最大负载电流: 52A (6mm<sup>2</sup> 刚性导线)  
 Maximum load current: 52A(6mm<sup>2</sup> rigid wire)



厚 / 宽 / 高 8.2/90.5/42.2/43.7  
 Thickness/Width/Height/ Height  
 刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
 Rigid cable Soft cable  
 AWG:20-8 0.5-10 0.5-10

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
直插式接线端子: 可安装在 NS35 型导轨上 Push-in terminal block Can be installed on tracks NS35 type		UPT-6/2-2	灰色 (GY) 3360103	UPT-6/2-2PE	黄 + 绿 (PE) 3360104
(1) 端板 End plate		G-UPT-6/2-2	3360109	G-UPT-6/2-2	3360109
(2) 插拔式桥接件: 用于端子中央实现横向桥接 齿背绝缘处可标识分: 2-位、3-位、10-位 Insert-pull type bridging component: used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit, 3-bit, 10-bit.		JFBS2-6 JFBS3-6 JFBS4-6 JFBS5-6 JFBS10-6	3010503037 3010503042 3010503068 3010503116 3010503048	JFBS2-6 JFBS3-6 JFBS4-6 JFBS5-6 JFBS10-6	3010503037 3010503042 3010503068 3010503116 3010503048
(3) 螺丝刀 Screwdriver		STF2-0.8×4	3010113025	STF2-0.8×4	3010113025
(4) 扁平标记条: 共 10 条, 每条 10 位 可嵌入端子外侧标识槽进行标示。 Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.		ZBFM8	3010505004	ZBFM8	3010505004
(5) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		ZB8	3010108004	ZB8	3010108004
(6) 终端固定件: 对端子排终端其固定件作 用。标记夹和标记条可卡在它上进行标识。 Terminal fixed component: Imposing fixed function on terminal rows's termination the, mark clam pand mark strip can be blocked onto it for marking		E/3	3010506001	E/3	3010506001

# Industrial Distribution Terminal Blocks

## Push-in terminal block

工业配电接线端子 - 直插式接线端子



UPT

UPT-10 直插式接线端子 Push-in terminal block				UPT-10PE 直插式接线端子 Push-in terminal block				UPT-10/1-2 直插式接线端子 Push-in terminal block			
厚 / 宽 / 高 / 高		10.2/67.7/49.6/51.1		厚 / 宽 / 高 / 高		10.2/67.7/49.6/51.1		厚 / 宽 / 高 / 高		10.2/88.9/49.6/51.5	
Thickness/Width/Height/ Height				Thickness/Width/Height/ Height				Thickness/Width/Height/ Height			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
Rigid cable	Soft cable	(A)	(V)	Rigid cable	Soft cable	(A)	(V)	Rigid cable	Soft cable	(A)	(V)
AWG:20-6	0.5-16	0.5-16	57 1000	AWG:20-6	0.5-16	0.5-16		AWG:20-6	0.5-16	0.5-16	57 1000
最大负载电流: 70A (16mm <sup>2</sup> 刚性导线)				最大负载电流: 70A (16mm <sup>2</sup> 刚性导线)				最大负载电流: 70A (16mm <sup>2</sup> 刚性导线)			
Maximum load current: 70A(16mm <sup>2</sup> rigid wire)				Maximum load current: 70A(16mm <sup>2</sup> rigid wire)				Maximum load current: 70A(16mm <sup>2</sup> rigid wire)			
型号 Model	订货号 Order	Number		型号 Model	订货号 Order	Number		型号 Model	订货号 Order	Number	
UPT-10	灰色 (GY)	3360014		UPT-10PE	黄 + 绿 (PE)	3360015		UPT-10/1-2	灰色 (GY)	3360105	
	蓝色 (BE)	3360121			蓝色 (BE)	3360190					
	红色 (RD)	3360128									
G-UPT-10	3360017		G-UPT-10	3360017		G-UPT-10/1-2	3360107				
JFBS2-10-M02	3010503122		JFBS2-10-M02	3010503122		JFBS2-10-M02	3010503122				
JFBS3-10-M02	3010503123		JFBS3-10-M02	3010503123		JFBS3-10-M02	3010503123				
JFBS10-10-M02	3010503133		JFBS10-10-M02	3010503133		JFBS10-10-M02	3010503133				
ZB10	3010108005		ZB10	3010108005		ZB10	3010108005				
E/3	3010506001		E/3	3010506001		E/3	3010506001				

# Industrial Distribution Terminal Blocks

## Push-in terminal block

### 工业配电接线端子 - 直插式接线端子



UPT

#### UPT-10/1-2PE

直插式接线端子 Push-in terminal block

#### UPT-16

直插式接线端子 Push-in terminal block

UPT-10/1-2PE			UPT-16			
直插式接线端子 Push-in terminal block			直插式接线端子 Push-in terminal block			
厚 / 宽 / 高	10.2/88.9/49.6/51.1		厚 / 宽 / 高	12.2/75.4/52.6/54.1		
Thickness/Width/Height	mm/mm/mm		Thickness/Width/Height	mm/mm/mm		
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )		刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I U
	Rigid cable	Soft cable		Rigid cable	Soft cable	(A) (V)
AWG:20-6	0.5-16	0.5-16	AWG:20-4	0.5-25	0.5-25	76 1000
			最大负载电流: 85A (25mm <sup>2</sup> 刚性导线)			
			Maximum load current: 85A(25mm <sup>2</sup> rigid wire)			

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
直插式接线端子: 可安装在 NS35 型导轨上 Push-in terminal block Can be installed on tracks NS35 type		UPT-10/1-2PE	黄 + 绿 (PE) 3360106	UPT-16	灰色 (GY) 3360205
(1) 端板 End plate		G-UPT-10/1-2	3360107	G-UPT-16	3360222
(2) 插拔式桥接件: 用于端子中央实现横向桥接 齿背绝缘处可标识可分: 2-位、3-位、10-位 Insert-pull type bridging component: used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit, 3-bit, 10-bit.		JFBS2-10-M02 3010503122 JFBS3-10-M02 3010503123 JFBS10-10-M02 3010503133		JFBS2-16 3010503082	
(3) 螺丝刀 Screwdriver					
(4) 扁平标记条: 共 10 条, 每条 10 位 可嵌入端子外侧标识槽进行标示。 Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.					
(5) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		ZB10 3010108005		ZB12 3010108128	
(6) 终端固定件: 对端子排终端其固定件作 用。标记夹和标记条可卡在它上进行标识。 Terminal fixed component: Imposing fixed function on terminal rows's termination the, mark clam pand mark strip can be blocked onto it for marking		E/3 3010506001		E/3 3010506001	

# Industrial Distribution Terminal Blocks

## Pusin-in terminal block

工业配电接线端子 - 直插式接线端子



<b>UPT-16PE</b> 直插式接线端子 Push-in terminal block			<b>UPT-16/1-2</b> 直插式接线端子 Push-in terminal block					<b>UPT-16/1-2PE</b> 直插式接线端子 Push-in terminal block		
厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height			厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height					厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height		
刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) Rigid cable Solf cable			刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) I U Rigid cable Solf cable (A) (V)					刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) Rigid cable Solf cable		
AWG:20-4	0.5-25	0.5-25	AWG:20-4	0.5-25	0.5-25	76	1000	AWG:20-6	0.5-25	0.5-25
			最大负载电流: 85A (25mm <sup>2</sup> 刚性导线) Maximum load current: 85A(25mm <sup>2</sup> rigid wire)							
型号 Model	订货号 Order Number		型号 Model	订货号 Order Number		型号 Model	订货号 Order Number			
UPT-16PE	黄 + 绿 (PE) 3360206		UPT-16/1-2	灰色 (GY) 3360207		UPT-16/1-2PE	黄 + 绿 (PE) 3360208			
G-UPT-16	3360222		G-UPT-16/1-2	3360223		G-UPT-16/1-2	3360223			
JFBS2-16	3010503082		JFBS2-16	3010503082		JFBS2-16	3010503082			
ZB12	3010108128		ZB12	3010108128		ZB12	3010108128			
E/3	3010506001		E/3	3010506001		E/3	3010506001			

UPT

# Industrial Distribution Terminal Blocks

## Push-in terminal block

工业配电接线端子 - 直插式接线端子



UPT

### UPT-35

直插式接线端子 Push-in terminal block

### UPT-35PE

直插式接线端子 Push-in terminal block

UPT-35				UPT-35PE			
直插式接线端子 Push-in terminal block				直插式接线端子 Push-in terminal block			
厚 / 宽 / 高		16/91.6/76.2/77.7		厚 / 宽 / 高		16/91.6/76.2/77.7	
Thickness/Width/Height		Thickness/Width/Height		Thickness/Width/Height		Thickness/Width/Height	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
Rigid cable	Soft cable	(A)	(V)	Rigid cable	Soft cable	(A)	(V)
AWG:12-2	2.5-35	2.5-35	125 1000	AWG:12-2	2.5-35	2.5-35	
最大负载电流: 125A (35mm <sup>2</sup> 刚性导线)				Maximum load current: 125A(35mm <sup>2</sup> rigid wire)			

#### 说明 Specification 简图 Schematic Drawing

直插式接线端子: 可安装在 NS35 型导轨上  
Push-in terminal block  
Can be installed on tracks NS35 type

#### 型号 Model 订货号 Order Number

UPT-35 灰色 (GY) 3360209

#### 型号 Model 订货号 Order Number

UPT-35PE 黄 + 绿 (PE) 3360210

(1) 端板 End plate



(2) 插拔式桥接件: 用于端子中央实现横向桥接  
齿背绝缘处可标识可分: 2-位、3-位、10-位  
Insert-pull type bridging component: used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit, 3-bit, 10-bit.



JFBS2-35 3010503083

JFBS2-35 3010503083

(3) 螺丝刀 Screwdriver



(4) 扁平标记条: 共 10 条, 每条 10 位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.



(5) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



ZB16 3010108150

ZB16 3010108150

(6) 终端固定件: 对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing fixed function on terminal rows's termination, the mark clam and mark strip can be blocked onto it for marking



E/3 3010506001

E/3 3010506001

# Industrial Distribution Terminal Blocks

## Pusin-in terminal block

工业配电接线端子 - 直插式接线端子



### UPTU-35/4\*6/6\*2.5/GY

电位分配端子 Potential distribution terminal

厚 / 宽 / 高 / 高 16.3/110.4/47.4/48.9

Thickness/Width/Height/ Height

刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>) I U

Rigid cable Soft cable (A) (V)

AWG:24-12 0.2-4 0.2-2.5 24 1000

### UPTU-35/4\*10/GY

电位分配端子 Potential distribution terminal

厚 / 宽 / 高 / 高 19.4/79.9/48.8/50.3

Thickness/Width/Height/ Height

刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>) I U

Rigid cable Soft cable (A) (V)

AWG:20-6 0.5-10 0.5-10 57 1000

UPT

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
UPTU-35/4*6/6*2.5 灰色 (GY)	3360209	UPTU-35/4*10	
JFBS2-10	3010503081	JFBS2-10	3010503081
ZB16	3010108150	ZB16	3010108150
E/3	3010506001	E/3	3010506001

# Industrial Distribution Terminal Blocks

## Power distribution block series

### 工业配电接线端子 - 配电块系列

#### 特点:

1. 采用免工具直插式连接, 节省接线时间
2. 外观小巧, 可节省大量空间
3. 多位直通模块采用榫槽结合设计, 模块化程度高, 可轻松并排安装
4. 支持 DIN 导轨安装、直插安装或自黏式安装, 使用更灵活
5. 即连即用, 无需手动桥接即可快速安装

#### Features:

1. Tool-free in-line connection, saving wiring time
2. Small appearance, can save a lot of space
3. The multi-position straight-through module adopts the tongue-and-groove joint design, which has a high degree of modularity. Easy side-by-side installation
4. Support DIN rail installation, direct installation or self-adhesive installation, more flexible use
5. Ready to use, quick installation without manual bridging



#### JUT15-4x2.5-F 直插式配电块端子 Push-in power distribution block terminal

厚 / 宽 / 高	45.5/10.8/31.1/38.6 (平行导轨)			
Thickness/Width/Height	mm/mm/mm			
主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
Rigid cable	Solf cable	(A)	(V)	
支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )		
刚 :AWG:26-12	Rigid cable	Solf cable		
柔 :AWG:26-14	0.2-4	0.2-2.5	24	690
最大负载电流: 32A(4mm <sup>2</sup> 刚性导线)				
Maximum load current: 32A(4mm <sup>2</sup> rigid wire)				

#### JUT15-4x2.5-P 直插式配电块端子 Push-in power distribution block terminal

厚 / 宽 / 高	28.8/58.5/32.5/40 (垂直导轨)			
Thickness/Width/Height	mm/mm/mm/mm			
主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
Rigid cable	Solf cable	(A)	(V)	
支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )		
刚 :AWG:26-12	Rigid cable	Solf cable		
柔 :AWG:26-14	0.2-4	0.2-2.5	24	690
最大负载电流: 32A (4mm <sup>2</sup> 刚性导线)				
Maximum load current: 32A(4mm <sup>2</sup> rigid wire)				

#### 说明 Specification 简图 Schematic Drawing

直插式接线端子: 可安装在 NS35 型导轨上  
Push-in power distribution block terminal  
Can be installed on tracks NS35 type

#### 型号 Model

#### 订货号 Order Number

JUT15-4x2.5 灰色 (GY) 3011701022

#### 型号 Model

#### 订货号 Order Number

JUT15-4x2.5 灰色 (GY) 3011701022

(1) 导轨脚: 用于直插式配电块平行连接 ns 35 型导轨。  
Guide rail feet: used to connect the ns 35 type guide rail in parallel with their-line power distribution block.



F-NS35

3011701015

F-NS35

3011701015

(2) 导轨座: 用于直插式配电块垂直连接 ns 35 型导轨, 同时适配 ns 15 型导轨。  
Guide rail seat: It is used to connect the ns 35-shaped guide rail vertically with the in-line power distribution block, and it is also suitable for the ns 15-shaped guide rail.



PAD-NS15/35

3011701016

PAD-NS15/35

3011701016

(3) 插拔式桥接件: 用于端子中央实现横向桥接, 齿背绝缘处可标识可分: 2-位。  
Insert-pull type bridging component: used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit.



JFBS2-2.5

3010503028

JFBS2-2.5

3010503028

(4) 螺丝刀 Screwdriver



STF0-0.4x2.5

3010113021

STF0-0.4x2.5

3010113021

(5) 终端固定件: 对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing fixed function on terminal rows's termination, the mark clam and mark strip can be blocked onto it for marking



JUT15-F

3011701044

JUT15-F

3011701044

# Industrial Distribution Terminal Blocks

## Power distribution block series

### 工业配电接线端子 - 配电块系列



#### JUT15-6-4x2.5-F 直插式配电块端子 Push-in power distribution block terminal

厚 / 宽 / 高 / 高 45.5/20.5/31.1/38.6 (平行导轨)  
Thickness/Width/Height/ Height

主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:20-8	Rigid cable	Soft cable	(A)	(V)
柔: AWG:20-10	0.5-10	0.5-6	41	690

最大负载电流: 57A (10mm<sup>2</sup> 刚性导线)  
Maximum load current: 57A(10mm<sup>2</sup> rigid wire)

支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:26-12	Rigid cable	Soft cable		
柔: AWG:26-14	0.2-4	0.2-2.5	24	690

最大负载电流: 32A (4mm<sup>2</sup> 刚性导线)  
Maximum load current: 32A(4mm<sup>2</sup> rigid wire)

#### JUT15-6-4x2.5-P 直插式配电块端子 Push-in power distribution block terminal

厚 / 宽 / 高 / 高 28.8/58.5/32.5/40 (垂直导轨)  
Thickness/Width/Height/ Height

主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:20-8	Rigid cable	Soft cable	(A)	(V)
柔: AWG:20-10	0.5-10	0.5-6	41	690

最大负载电流: 57A (10mm<sup>2</sup> 刚性导线)  
Maximum load current: 57A(10mm<sup>2</sup> rigid wire)

支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:26-12	Rigid cable	Soft cable		
柔: AWG:26-14	0.2-4	0.2-2.5	24	690

最大负载电流: 32A (4mm<sup>2</sup> 刚性导线)  
Maximum load current: 32A(4mm<sup>2</sup> rigid wire)

#### JUT15-6x2.5-F 直插式配电块端子 Push-in power distribution block terminal

厚 / 宽 / 高 / 高 19.5/45.5/31.1/38.6 (平行导轨)  
Thickness/Width/Height/ Height

主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:20-8	Rigid cable	Soft cable	(A)	(V)
柔: AWG:20-10	0.5-10	0.5-6	41	690

最大负载电流: 57A (10mm<sup>2</sup> 刚性导线)  
Maximum load current: 57A(10mm<sup>2</sup> rigid wire)

支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:26-12	Rigid cable	Soft cable		
柔: AWG:26-14	0.2-4	0.2-2.5	24	690

最大负载电流: 32A (4mm<sup>2</sup> 刚性导线)  
Maximum load current: 32A(4mm<sup>2</sup> rigid wire)

JUT15

型号 Model	订货号 Order Number
JUT15-6-4x2.5	灰色(GY) 3011701024 红色(RD) 3011701050

型号 Model	订货号 Order Number
JUT15-4x2.5	灰色(GY) 3011701024 红色(RD) 3011701050

型号 Model	订货号 Order Number
JUT15-6x2.5	灰色(GY) 3011701003 红色(RD) 3011701051

F-NS35	3011701015
--------	------------

F-NS35	3011701015
--------	------------

F-NS35	3011701015
--------	------------

PAD-NS15/35	3011701016
-------------	------------

PAD-NS15/35	3011701016
-------------	------------

PAD-NS15/35	3011701016
-------------	------------

JFBS2-2.5	3010503028
-----------	------------

JFBS2-2.5	3010503028
-----------	------------

JFBS2-2.5	3010503028
-----------	------------

STF0-0.4x2.5	3010113021
--------------	------------

STF0-0.4x2.5	3010113021
--------------	------------

STF0-0.4x2.5	3010113021
--------------	------------

JUT15-F	3011701044
---------	------------

JUT15-F	3011701044
---------	------------

JUT15-F	3011701044
---------	------------



# Industrial Distribution Terminal Blocks

## Power distribution block series

工业配电接线端子 - 配电块系列



JUT15

### JUT15-6x2.5-P 直插式配电块端子

#### Push-in power distribution block terminal

厚 / 宽 / 高	28.8/58.5/32.5/40 (垂直导轨)			
Thickness/Width/Height	mm/mm/mm/mm (Vertical Guide Rail)			
主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
	Rigid cable	Soft cable	(A)	(V)
支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )		
刚:AWG:26-12	Rigid cable	Soft cable		
柔:AWG:26-14	0.2-4	0.2-2.5	24	690
最大负载电流: 32A(4mm <sup>2</sup> 刚性导线)				
Maximum load current: 32A(4mm <sup>2</sup> rigid wire)				

### JUT15-6-6x2.5-F 直插式配电块端子

#### Push-in power distribution block terminal

厚 / 宽 / 高	29.2/45.5/31.1/38.6 (平行导轨)			
Thickness/Width/Height	mm/mm/mm/mm (Parallel Guide Rail)			
主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
	Rigid cable	Soft cable	(A)	(V)
刚:AWG:20-8	0.5-10	0.5-6	41	690
最大负载电流: 57A (10mm <sup>2</sup> 刚性导线)				
Maximum load current: 57A(10mm <sup>2</sup> rigid wire)				
支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )		
刚:AWG:26-12	Rigid cable	Soft cable		
柔:AWG:26-14	0.2-4	0.2-2.5	24	690
最大负载电流: 32A (4mm <sup>2</sup> 刚性导线)				
Maximum load current: 32A(4mm <sup>2</sup> rigid wire)				

#### 说明 Specification 简图 Schematic Drawing

直插式接线端子: 可安装在 NS35 型导轨上  
Push-in power distribution block terminal  
Can be installed on tracks NS35 type

#### 型号 Model 订货号 Order Number

JUT15-6x2.5	灰色 (GY)	3011701003
	红色 (RD)	3011701051

#### 型号 Model 订货号 Order Number

JUT15-6-6x2.5	灰色 (GY)	3011701006
	红色 (RD)	3011701009
	蓝色 (BE)	3011701012

(1) 导轨脚: 用于直插式配电块平行连接 ns 35 型导轨。  
Guide rail feet: used to connect the ns 35 type guide rail in parallel with their-line power distribution block.



F-NS35	3011701015
--------	------------

F-NS35	3011701015
--------	------------

(2) 导轨座: 用于直插式配电块垂直连接 ns 35 型导轨, 同时适配 ns 15 型导轨。  
Guide rail seat: It is used to connect the ns 35-shaped guide rail vertically with the in-line power distribution block, and it is also suitable for the ns 15-shaped guide rail.



PAD-NS15/35	3011701016
-------------	------------

PAD-NS15/35	3011701016
-------------	------------

(3) 插拔式桥接件: 用于端子中央实现横向桥接, 齿背绝缘处可标识可分: 2-位。  
Insert-pull type bridging component: used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit.



JFBS2-2.5	3010503028
-----------	------------

JFBS2-2.5	3010503028
-----------	------------

(4) 螺丝刀 Screwdriver



STF0-0.4x2.5	3010113021
--------------	------------

STF0-0.4x2.5	3010113021
--------------	------------

(5) 终端固定件: 对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: imposing fixed function on terminal rows's termination, the mark clam and mark strip can be blocked onto it for marking



JUT15-F	3011701044
---------	------------

JUT15-F	3011701044
---------	------------

# Industrial Distribution Terminal Blocks

## Power distribution block series

### 工业配电接线端子 - 配电块系列



#### JUT15-6-6x2.5-P 直插式配电块端子 Push-in power distribution block terminal

厚 / 宽 / 高 / 高 45.5/20.5/31.1/38.6 (垂直导轨)  
Thickness/Width/Height/Height

主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:20-8	Rigid cable	Soft cable	(A)	(V)
柔: AWG:20-10	0.5-10	0.5-6	41	690

最大负载电流: 57A (10mm<sup>2</sup> 刚性导线)  
Maximum load current: 57A(10mm<sup>2</sup> rigid wire)

支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:26-12	Rigid cable	Soft cable		
柔: AWG:26-14	0.2-4	0.2-2.5	24	690

最大负载电流: 32A (4mm<sup>2</sup> 刚性导线)  
Maximum load current: 32A(4mm<sup>2</sup> rigid wire)

#### JUT15-10x2.5-F 直插式配电块端子 Push-in power distribution block terminal

厚 / 宽 / 高 / 高 45.5/26.4/31.1/38.6 (平行导轨)  
Thickness/Width/Height/Height

主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:20-8	Rigid cable	Soft cable	(A)	(V)
柔: AWG:20-10	0.5-10	0.5-6	41	690

最大负载电流: 57A (10mm<sup>2</sup> 刚性导线)  
Maximum load current: 57A(10mm<sup>2</sup> rigid wire)

支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:26-12	Rigid cable	Soft cable		
柔: AWG:26-14	0.2-4	0.2-2.5	24	690

最大负载电流: 32A (4mm<sup>2</sup> 刚性导线)  
Maximum load current: 32A(4mm<sup>2</sup> rigid wire)

#### JUT15-10x2.5-P 直插式配电块端子 Push-in power distribution block terminal

厚 / 宽 / 高 / 高 28.8/58.5/32.5/30.5 (平行导轨)  
Thickness/Width/Height/Height

主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:20-8	Rigid cable	Soft cable	(A)	(V)
柔: AWG:20-10	0.5-10	0.5-6	41	690

最大负载电流: 57A (10mm<sup>2</sup> 刚性导线)  
Maximum load current: 57A(10mm<sup>2</sup> rigid wire)

支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:26-12	Rigid cable	Soft cable		
柔: AWG:26-14	0.2-4	0.2-2.5	24	690

最大负载电流: 32A (4mm<sup>2</sup> 刚性导线)  
Maximum load current: 32A(4mm<sup>2</sup> rigid wire)

JUT15

型号 Model	订货号 Order Number
JUT15-6-6x2.5	灰色 (GY) 3011701006
	红色 (RD) 3011701009
	蓝色 (BE) 3011701012

型号 Model	订货号 Order Number
JUT15-10x2.5	灰色 (GY) 3011701023
	红色 (RD) 3011701046
	蓝色 (BE) 3011701047

型号 Model	订货号 Order Number
JUT15-10x2.5	灰色 (GY) 3011701023
	红色 (RD) 3011701046
	蓝色 (BE) 3011701047

F-NS35	3011701015
--------	------------

F-NS35	3011701015
--------	------------

F-NS35	3011701015
--------	------------

PAD-NS15/35	3011701016
-------------	------------

PAD-NS15/35	3011701016
-------------	------------

PAD-NS15/35	3011701016
-------------	------------

JFBS2-2.5	3010503028
-----------	------------

JFBS2-2.5	3010503028
-----------	------------

JFBS2-2.5	3010503028
-----------	------------

STF0-0.4x2.5	3010113021
--------------	------------

STF0-0.4x2.5	3010113021
--------------	------------

STF0-0.4x2.5	3010113021
--------------	------------

JUT15-F	3011701044
---------	------------

JUT15-F	3011701044
---------	------------

JUT15-F	3011701044
---------	------------

# Industrial Distribution Terminal Blocks

## Power distribution block series

### 工业配电接线端子 - 配电块系列



JUT15

#### JUT15-6-10x2.5-F 直插式配电块端子 Push-in power distribution block terminal

厚 / 宽 / 高 / 高	45.5/36.1/31.1/38.6 (平行导轨)			
Thickness/Width/Height/ 高	Height			
主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:20-8	Rigid cable	Soft cable	(A)	(V)
柔: AWG:20-10	0.5-10	0.5-6	41	690
最大负载电流: 57A (10mm <sup>2</sup> 刚性导线)				
Maximum load current: 57A (10mm <sup>2</sup> rigid wire)				
支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )		
刚: AWG:26-12	Rigid cable	Soft cable		
柔: AWG:26-14	0.2-4	0.2-2.5	24	690
最大负载电流: 32A (4mm <sup>2</sup> 刚性导线)				
Maximum load current: 32A (4mm <sup>2</sup> rigid wire)				

#### JUT15-6-10x2.5-P 直插式配电块端子 Push-in power distribution block terminal

厚 / 宽 / 高 / 高	28.8/58.5/32.5/40 (垂直导轨)			
Thickness/Width/Height/ 高	Height			
主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:20-8	Rigid cable	Soft cable	(A)	(V)
柔: AWG:20-10	0.5-10	0.5-6	41	690
最大负载电流: 57A (10mm <sup>2</sup> 刚性导线)				
Maximum load current: 57A (10mm <sup>2</sup> rigid wire)				
支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )		
刚: AWG:26-12	Rigid cable	Soft cable		
柔: AWG:26-14	0.2-4	0.2-2.5	24	690
最大负载电流: 32A (4mm <sup>2</sup> 刚性导线)				
Maximum load current: 32A (4mm <sup>2</sup> rigid wire)				

#### 说明 Specification 简图 Schematic Drawing

直插式接线端子: 可安装在 NS35 型导轨上  
Push-in power distribution block terminal  
Can be installed on tracks NS35 type

#### 型号 Model 订货号 Order Number

JUT15-6-10x2.5 灰色 (GY) 3011701025

#### 型号 Model 订货号 Order Number

JUT15-6-10x2.5 灰色 (GY) 3011701025

(1) 导轨脚: 用于直插式配电块平行连接 ns 35 型导轨。  
Guide rail feet: used to connect the ns 35 type guide rail in parallel with their-line power distribution block.



F-NS35 3011701015

F-NS35 3011701015

(2) 导轨座: 用于直插式配电块垂直连接 ns 35 型导轨, 同时适配 ns 15 型导轨。  
Guide rail seat: It is used to connect the ns 35-shaped guide rail vertically with the in-line power distribution block, and it is also suitable for the ns 15-shaped guide rail.



PAD-NS15/35 3011701016

PAD-NS15/35 3011701016

(3) 插拔式桥接件: 用于端子中央实现横向桥接, 齿背绝缘处可标识可分: 2-位。  
Insert-pull type bridging component: used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit.



JFBS2-2.5 3010503028

JFBS2-2.5 3010503028

(4) 螺丝刀 Screwdriver



STF0-0.4x2.5 3010113021

STF0-0.4x2.5 3010113021

(5) 终端固定件: 对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing fixed function on terminal rows's termination, the mark clam pand mark strip can be blocked onto it for marking



JUT15-F 3011701044

JUT15-F 3011701044

# Industrial Distribution Terminal Blocks

## Power distribution block series

### 工业配电接线端子 - 配电块系列



#### JUT15-6-12x2.5-F 直插式配电块端子 Push-in power distribution block terminal

厚 / 宽 / 高 / 高 44.8/45.3/31.1/38.6 (平行导轨)  
Thickness/Width/Height/Height

主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:20-8	Rigid cable	Soft cable	(A)	(V)
柔: AWG:20-10	0.5-10	0.5-6	41	690

最大负载电流: 57A (10mm<sup>2</sup> 刚性导线)  
Maximum load current: 57A(10mm<sup>2</sup> rigid wire)

支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:26-12	Rigid cable	Soft cable		
柔: AWG:26-14	0.2-4	0.2-2.5	24	690

最大负载电流: 32A (4mm<sup>2</sup> 刚性导线)  
Maximum load current: 32A(4mm<sup>2</sup> rigid wire)

#### JUT15-6-12x2.5-P 直插式配电块端子 Push-in power distribution block terminal

厚 / 宽 / 高 / 高 28.8/58.5/32.5/30.5 (垂直导轨)  
Thickness/Width/Height/Height

主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:20-8	Rigid cable	Soft cable	(A)	(V)
柔: AWG:20-10	0.5-10	0.5-6	41	690

最大负载电流: 57A (10mm<sup>2</sup> 刚性导线)  
Maximum load current: 57A(10mm<sup>2</sup> rigid wire)

支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:26-12	Rigid cable	Soft cable		
柔: AWG:26-14	0.2-4	0.2-2.5	24	690

最大负载电流: 32A (4mm<sup>2</sup> 刚性导线)  
Maximum load current: 32A(4mm<sup>2</sup> rigid wire)

#### JUT15-12x2.5-F 直插式配电块端子 Push-in power distribution block terminal

厚 / 宽 / 高 / 高 35.1/45.5/31.1/38.6 (平行导轨)  
Thickness/Width/Height/Height

主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:20-8	Rigid cable	Soft cable	(A)	(V)
柔: AWG:20-10	0.5-10	0.5-6	41	690

最大负载电流: 57A (10mm<sup>2</sup> 刚性导线)  
Maximum load current: 57A(10mm<sup>2</sup> rigid wire)

支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
刚: AWG:26-12	Rigid cable	Soft cable		
柔: AWG:26-14	0.2-4	0.2-2.5	24	690

最大负载电流: 32A (4mm<sup>2</sup> 刚性导线)  
Maximum load current: 32A(4mm<sup>2</sup> rigid wire)

JUT15

型号 Model	订货号 Order Number
JUT15-6-12x2.5	灰色 (GY) 3011701007
	红色 (RD) 3011701010
	蓝色 (BE) 3011701013

型号 Model	订货号 Order Number
JUT15-6-10x2.5	灰色 (GY) 3011701007
	红色 (RD) 3011701010
	蓝色 (BE) 3011701013

型号 Model	订货号 Order Number
JUT15-12x2.5	灰色 (GY) 3011701004
	蓝色 (BE) 3011701045

F-NS35	3011701015
--------	------------

F-NS35	3011701015
--------	------------

F-NS35	3011701015
--------	------------

PAD-NS15/35	3011701016
-------------	------------

PAD-NS15/35	3011701016
-------------	------------

PAD-NS15/35	3011701016
-------------	------------

JFBS2-2.5	3010503028
-----------	------------

JFBS2-2.5	3010503028
-----------	------------

JFBS2-2.5	3010503028
-----------	------------

STF0-0.4x2.5	3010113021
--------------	------------

STF0-0.4x2.5	3010113021
--------------	------------

STF0-0.4x2.5	3010113021
--------------	------------

JUT15-F	3011701044
---------	------------

JUT15-F	3011701044
---------	------------

JUT15-F	3011701044
---------	------------

# Industrial Distribution Terminal Blocks

## Power distribution block series

工业配电接线端子 - 配电块系列



JUT15

### JUT15-12x2.5-P 直插式配电块端子

#### Push-in power distribution block terminal

厚 / 宽 / 高	28.8/58.5/32.5/40 (垂直导轨)			
Thickness/Width/Height	mm/mm/mm			
主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
	Rigid cable	Soft cable	(A)	(V)
支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )		
刚:AWG:26-12	Rigid cable	Soft cable		
柔:AWG:26-14	0.2-4	0.2-2.5	24	690
最大负载电流: 32A(4mm <sup>2</sup> 刚性导线)				
Maximum load current: 32A(4mm <sup>2</sup> rigid wire)				

### JUT15-6-18x2.5-F 直插式配电块端子

#### Push-in power distribution block terminal

厚 / 宽 / 高	60.4/45.5/31.1/38.6 (平行导轨)			
Thickness/Width/Height	mm/mm/mm			
主线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
	Rigid cable	Soft cable	(A)	(V)
刚:AWG:20-8	0.5-10	0.5-6	41	690
最大负载电流: 57A (10mm <sup>2</sup> 刚性导线)				
Maximum load current: 57A(10mm <sup>2</sup> rigid wire)				
支线	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )		
刚:AWG:26-12	Rigid cable	Soft cable		
柔:AWG:26-14	0.2-4	0.2-2.5	24	690
最大负载电流: 32A (4mm <sup>2</sup> 刚性导线)				
Maximum load current: 32A(4mm <sup>2</sup> rigid wire)				

#### 说明 Specification 简图 Schematic Drawing

直插式接线端子: 可安装在 NS35 型导轨上  
Push-in power distribution block terminal  
Can be installed on tracks NS35 type

#### 型号 Model 订货号 Order Number

JUT15-12x2.5	灰色 (GY) 蓝色 (BE)	3011701004 3011701045
--------------	--------------------	--------------------------

#### 型号 Model 订货号 Order Number

JUT15-6-18x2.5	灰色 (GY) 红色 (RD) 蓝色 (BE)	3011701008 3011701011 3011701014
----------------	-------------------------------	--

(1) 导轨脚: 用于直插式配电块平行连接 ns 35 型导轨。  
Guide rail feet: used to connect the ns 35 type guide rail in parallel with their-line power distribution block.



F-NS35	3011701015
--------	------------

F-NS35	3011701015
--------	------------

(2) 导轨座: 用于直插式配电块垂直连接 ns 35 型导轨, 同时适配 ns 15 型导轨。  
Guide rail seat: It is used to connect the ns 35-shaped guide rail vertically with the in-line power distribution block, and it is also suitable for the ns 15-shaped guide rail.



PAD-NS15/35	3011701016
-------------	------------

PAD-NS15/35	3011701016
-------------	------------

(3) 插拔式桥接件: 用于端子中央实现横向桥接, 齿背绝缘处可标识可分: 2-位。  
Insert-pull type bridging component: used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit.



JFBS2-2.5	3010503028
-----------	------------

JFBS2-2.5	3010503028
-----------	------------

(4) 螺丝刀 Screwdriver



STF0-0.4x2.5	3010113021
--------------	------------

STF0-0.4x2.5	3010113021
--------------	------------

(5) 终端固定件: 对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing fixed function on terminal rows's termination, the mark clam and mark strip can be blocked onto it for marking



JUT15-F	3011701044
---------	------------

JUT15-F	3011701044
---------	------------

# Industrial Distribution Terminal Blocks

## Power distribution block series

工业配电接线端子 - 配电块系列



**JUT15-6-18x2.5-P** 直插式配电块端子  
Push-in power distribution block terminal

厚 / 宽 / 高 / 高 28.8/61.3/32.5/40 (垂直导轨)  
Thickness/Width/Height/Height  
主线 刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>) I U  
刚 :AWG:20-8 Rigid cable Soft cable (A) (V)  
柔 :AWG:20-10 0.5-10 0.5-6 41 690  
最大负载电流: 57A (10mm<sup>2</sup> 刚性导线)  
Maximum load current: 57A(10mm<sup>2</sup> rigid wire)  
支线 刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
刚 :AWG:26-12 Rigid cable Soft cable  
柔 :AWG:26-14 0.2-4 0.2-2.5 24 690  
最大负载电流: 32A (4mm<sup>2</sup> 刚性导线)  
Maximum load current: 32A(4mm<sup>2</sup> rigid wire)

型号 Model	订货号 Order Number
JUT15-6-18x2.5	灰色 (GY) 3011701008
	红色 (RD) 3011701011
	蓝色 (BE) 3011701014

**JUT15-18x2.5-F** 直插式配电块端子  
Push-in power distribution block terminal

厚 / 宽 / 高 / 高 50.7/45.5/31.1/38.6 (平行导轨)  
Thickness/Width/Height/Height  
主线 刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>) I U  
刚 :AWG:20-8 Rigid cable Soft cable (A) (V)  
柔 :AWG:20-10 0.5-10 0.5-6 41 690  
支线 刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
刚 :AWG:26-12 Rigid cable Soft cable  
柔 :AWG:26-14 0.2-4 0.2-2.5 24 690  
最大负载电流: 32A (4mm<sup>2</sup> 刚性导线)  
Maximum load current: 32A(4mm<sup>2</sup> rigid wire)

型号 Model	订货号 Order Number
JUT15-18x2.5	灰色 (GY) 3011701005
	红色 (RD) 3011701042
	蓝色 (BE) 3011701043

**JUT15-18x2.5-P** 直插式配电块端子  
Push-in power distribution block terminal

厚 / 宽 / 高 / 高 28.8/58.5/32.5/40 (垂直导轨)  
Thickness/Width/Height/Height  
主线 刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>) I U  
刚 :AWG:20-8 Rigid cable Soft cable (A) (V)  
柔 :AWG:20-10 0.5-10 0.5-6 41 690  
支线 刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
刚 :AWG:26-12 Rigid cable Soft cable  
柔 :AWG:26-14 0.2-4 0.2-2.5 24 690  
最大负载电流: 32A (4mm<sup>2</sup> 刚性导线)  
Maximum load current: 32A(4mm<sup>2</sup> rigid wire)

型号 Model	订货号 Order Number
JUT15-18x2.5	灰色 (GY) 3011701005
	红色 (RD) 3011701042
	蓝色 (BE) 3011701043

JUT15

F-NS35 3011701015

F-NS35 3011701015

F-NS35 3011701015

PAD-NS15/35 3011701016

PAD-NS15/35 3011701016

PAD-NS15/35 3011701016

JFBS2-2.5 3010503028

JFBS2-2.5 3010503028

JFBS2-2.5 3010503028

STF0-0.4x2.5 3010113021

STF0-0.4x2.5 3010113021

STF0-0.4x2.5 3010113021

JUT15-F 3011701044

JUT15-F 3011701044

JUT15-F 3011701044



**F-NS35**  
导轨脚 Rail foot

**PAD-NS15/35**  
导轨座 Rail seat

**JUT15-F**  
终端固定件 Terminal fixture

型号 Model	订货号 Order Number
JUT15-F-NS35	3011701015

型号 Model	订货号 Order Number
JUT15-PAD-NS15/35	3011701016

型号 Model	订货号 Order Number
JUT15-F-NS35	3011701044

# Industrial Distribution Terminal Blocks

## Spring type terminal series

### 工业配电接线端子 - 弹簧类接线端子系列



本系列端子默认颜色: 深灰色 (DK/GY)  
支持客户定制颜色

#### 特点

1. 单股导线 (多股导线沾锡或加冷压头) 直接插入;
2. 较螺钉端子接线时间节省 70%;
3. 震动环境防松脱

#### Advantage:

1. Solid wire plug-in connection;
2. Save 70% operation time than screw type connector;
3. Anti-vibration shock, antiloosening.

#### JUT14-1.5/DK/GY 二导线贯通接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高	4.2/53.5/35.6/43.1			
Thickness/Width/Height	mm/mm/mm/mm			
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
	Rigid cable	Soft cable	(A)	(V)
	24-14	24-16	17.5	800
IEC 60947-7-1				

#### JUT14-1.5/2-2 四导线贯通接线端子 Four-lead through-type wiring terminal

厚 / 宽 / 高	4.2/70.9/32.5/40			
Thickness/Width/Height	mm/mm/mm/mm			
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
	Rigid cable	Soft cable	(A)	(V)
	24-16	24-14	15	600
IEC 60947-7-1				

JUT14

#### 说明 Specification 简图 Schematic Drawing

弹簧型接线端子: 可安装在 NS35 型导轨上。  
Spring clip type terminal block  
Can be installed on tracks NS35 type.

(1) 插拔式桥接件: 用于端子中央实现横向桥接  
齿背绝缘处可标识可分: 2-位、3-位、10-位  
Insert-pull type bridging component: used  
to realize crosswise bridging at center of  
terminal, the mark of rail insulation can be  
divided into: 2-bit, 3-bit, 10-bit.



(2) 分组隔板: 用于端子组间的视角  
及电气隔离。  
Segment spacer: for visual and electric  
separation between neighboring  
terminal groups.



(3) 扁平标记条: 共 10 条, 每条 10 位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits  
per strip, it could be plugged in mark  
groove of terminal outer side for marking.



(4) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



(5) 终端固定件: 对端子排终端其固定件作  
用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing  
fixed function on terminal rows's  
termination the, mark clamp and mark  
strip can be blocked onto it for marking



#### 型号 Model 订货号 Order Number

JUT14-1.5	深灰色 (DK/GY) 蓝色 (BE)	3011601023 3011601032
FBS2-1.5		3010503029
FBS3-1.5		3010503030
FBS10-1.5		3010503031

JAP14-2.5 3011601031

ZBFM4 3010505001

ZB4 3010108001

E/3 3010506001

#### 型号 Model 订货号 Order Number

JUT14-1.5/2-2	深灰色 (DK/GY)	3011601053
FBS2-1.5		3010503029
FBS3-1.5		3010503030
FBS10-1.5		3010503031

ZBFM4 3010505001

ZB4 3010108001

E/3 3010506001

# Industrial Distribution Terminal Blocks

## Spring type terminal series

工业配电接线端子 - 弹簧类接线端子系列



**JUT14-2.5/DK/GY** 二导线贯通接线端子  
Two-lead through-type wiring terminal

**JUT14-2.5/1-2/DK/GY** 三导线贯通接线端子  
Three-lead through-type wiring terminal

**JUT14-2.5/2-2/DK/GY** 四导线贯通接线端子  
Four-lead through-type wiring terminal

厚 / 宽 / 高 / 高	5.2/53.5/35.6/43.1			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
24-16	24-14	24	800	
IEC 60947-7-1				

厚 / 宽 / 高 / 高	5.2/67.5/35.6/43.1			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
24-16	24-14	24	800	
IEC 60947-7-1				

厚 / 宽 / 高 / 高	5.2/81.5/35.6/43.1			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
24-16	24-14	24	800	
IEC 60947-7-1				

JUT14

型号 Model	订货号 Order Number
JUT14-2.5	深灰色 (DK/GY) 3011601005 蓝色 (BE) 3011601033 深灰色 (DK/GY) 3011601021 -M101
FBS2-2.5	3010503028
FBS3-2.5	3010503032
FBS10-2.5	3010503033
JAP14-2.5	3011601031
ZBFM5	3010505002
ZB5	3010108003
E/3	3010506001

型号 Model	订货号 Order Number
JUT14-2.5/1-2	深灰色 (DK/GY)3011601040
FBS2-2.5	3010503028
FBS3-2.5	3010503032
FBS10-2.5	3010503033
ZBFM5	3010505002
ZB5	3010108003
E/3	3010506001

型号 Model	订货号 Order Number
JUT14-2.5/2-2	深灰色 (DK/GY) 3011601006 蓝色 (BE) 3011601048 深灰色 (DK/GY) 3011601019 -M101
FBS2-2.5	3010503028
FBS3-2.5	3010503032
FBS10-2.5	3010503033
JAP14-2.5/2-2	3011601022
ZBFM5	3010505002
ZB5	3010108003
E/3	3010506001



# Industrial Distribution Terminal Blocks

## Spring type terminal series

### 工业配电接线端子 - 弹簧类接线端子系列



本系列端子默认颜色: 深灰色 (DK/GY)  
支持客户定制颜色

#### 特点

1. 单股导线 (多股导线沾锡或加冷压头) 直接插入;
2. 较螺钉端子接线时间节省 70%;
3. 震动环境防松脱

#### Advantage:

1. Solid wire plug-in connection;
2. Save 70% operation time than screw type connector;
3. Anti-vibration shock, antiloosening.

#### JUT14-2.5/2/DK/GY 四导线贯通接线端子 Four-lead through-type wiring terminal

厚 / 宽 / 高	5.2/78.3/47.5/55			
Thickness/Width/Height	mm/mm/mm			
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
	Rigid cable	Soft cable	(A)	(V)
	24-12	24-14	24	800
IEC 60947-7-1				

#### JUT14-2.5/3/DK/GY 六导线贯通接线端子 Six-lead through-type wiring terminal

厚 / 宽 / 高	5.2/117.1/56/63.5			
Thickness/Width/Height	mm/mm/mm			
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
	Rigid cable	Soft cable	(A)	(V)
	24-12	24-14	24	800
IEC 60947-7-1				

JUT14

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
弹簧型接线端子: 可安装在 NS35 型导轨上。 Spring clip type terminal block Can be installed on tracks NS35 type.	JUT14-2.5/2	深灰色 (DK/GY) 3011601013 蓝色 (BE) 3011601034 红色 (RD) 3011601049	JUT14-2.5/3	深灰色 (DK/GY) 3011601046
(1) 插拔式桥接件: 用于端子中央实现横向桥接 齿背绝缘处可标识可分: 2-位、3-位、10-位 Insert-pull type bridging component: used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit, 3-bit, 10-bit.	FBS2-2.5 FBS3-2.5 FBS10-2.5	3010503028 3010503032 3010503033	FBS2-2.5 FBS3-2.5 FBS10-2.5	3010503028 3010503032 3010503033
(2) 分组隔板: 用于端子组间的视角 及电气隔离。 Segment spacer: for visual and electric separation between neighboring terminal groups.	JAP14-2.5/2	3011601030		
(3) 扁平标记条: 共 10 条, 每条 10 位 可嵌入端子外侧标识槽进行标示。 Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.	ZBFM5	3010505002	ZBFM5	3010505002
(4) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	ZB5	3010108003	ZB5	3010108003
(5) 终端固定件: 对端子排终端其固定件作 用。标记夹和标记条可卡在它上进行标识。 Terminal fixed component: Imposing fixed function on terminal rows's termination the, mark clamp and mark strip can be blocked onto it for marking	E/3	3010506001	E/3	3010506001

# Industrial Distribution Terminal Blocks

## Spring type terminal series

工业配电接线端子 - 弹簧类接线端子系列



**JUT14-4/DK/GY** 二导线贯通接线端子  
Two-lead through-type wiring terminal

**JUT14-4/1-2/DK/GY** 三导线贯通接线端子  
Three-lead through-type wiring terminal

**JUT14-4/2-2/DK/GY** 四导线贯通接线端子  
Four-lead through-type wiring terminal

厚 / 宽 / 高 / 高	6.2/53.5/35.6/43.1			
Thickness/Width/Height/Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
24-10	24-12	32	800	
IEC 60947-7-1				

厚 / 宽 / 高 / 高	6.2/67.5/35.6/43.1			
Thickness/Width/Height/Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
24-12	24-14	32	800	
IEC 60947-7-1				

厚 / 宽 / 高 / 高	6.2/81.5/35.6/43.1			
Thickness/Width/Height/Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
24-10	24-12	32	800	
IEC 60947-7-1				

JUT14

型号 Model	订货号 Order Number
----------	------------------

JUT14-4	深灰色 (DK/GY)-M101	3011601020
	蓝色 (BE)	3011601035
	红色 (RD)	3011601051
	黄色 (YE)	3011601052
	黑色 (BK)	3011601054

型号 Model	订货号 Order Number
----------	------------------

JUT14-4/1-2	深灰色 (DK/GY)	3011601042
	蓝色 (BE)	3011601062

型号 Model	订货号 Order Number
----------	------------------

JUT14-4/2-2	深灰色 (DK/GY)	3011601001
-------------	-------------	------------

FBS2-4	3010503034
FBS3-4	3010503035
FBS10-4	3010503036

FBS2-4	3010503034
FBS3-4	3010503035
FBS10-4	3010503036

FBS2-4	3010503034
FBS3-4	3010503035
FBS10-4	3010503036

JAP14-2.5	3011601031
-----------	------------

JAP14-2.5/2-2	3011601022
---------------	------------

ZBFM6	3010505002
-------	------------

ZBFM6	3010505002
-------	------------

ZBFM6	3010505002
-------	------------

ZB6	3010108003
-----	------------

ZB6	3010108003
-----	------------

ZB6	3010108003
-----	------------

E/3	3010506001
-----	------------

E/3	3010506001
-----	------------

E/3	3010506001
-----	------------

# Industrial Distribution Terminal Blocks

## Spring type terminal series

### 工业配电接线端子 - 弹簧类接线端子系列



本系列端子默认颜色: 深灰色 (DK/GY)  
支持客户定制颜色

#### 特点

1. 单股导线 (多股导线沾锡或加冷压头) 直接插入;
2. 较螺钉端子接线时间节省 70%;
3. 震动环境防松脱

#### Advantage:

1. Solid wire plug-in connection;
2. Save 70% operation time than screw type connector;
3. Anti-vibration shock, antiloosening.

#### JUT14-4/2/DK/GY 四导线贯通接线端子

##### Four-lead through-type wiring terminal

厚 / 宽 / 高	6.2/78.3/47.5/55			
Thickness/Width/Height	mm/mm/mm			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
24-10	24-12	32	800	
IEC 60947-7-1				

#### JUT14-6/DK/GY 二导线贯通接线端子

##### Two-lead through-type wiring terminal

厚 / 宽 / 高	8.2/61.2/41.2/48.7			
Thickness/Width/Height	mm/mm/mm			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
24-8	24-10	40	800	
IEC 60947-7-1				

JUT14

#### 说明 Specification 简图 Schematic Drawing

弹簧型接线端子: 可安装在 NS35 型导轨上。  
Spring clip type terminal block  
Can be installed on tracks NS35 type.

(1) 插拔式桥接件: 用于端子中央实现横向桥接  
齿背绝缘处可标识可分: 2-位、3-位、10-位  
Insert-pull type bridging component: used  
to realize crosswise bridging at center of  
terminal, the mark of rail insulation can be  
divided into: 2-bit, 3-bit, 10-bit.



(2) 分组隔板: 用于端子组间的视角  
及电气隔离。  
Segment spacer: for visual and electric  
separation between neighboring  
terminal groups.



(3) 扁平标记条: 共 10 条, 每条 10 位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits  
per strip, it could be plugged in mark  
groove of terminal outer side for marking.



(4) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



(5) 终端固定件: 对端子排终端其固定件作  
用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing  
fixed function on terminal rows's  
termination the, mark clamp and mark  
strip can be blocked onto it for marking



#### 型号 Model 订货号 Order Number

JUT14-4/2 深灰色 (DK/GY) 3011601015  
蓝色 (BE) 3011601038

FBS2-4 3010503034  
FBS3-4 3010503035  
FBS10-4 3010503036

ZBFM6 3010505002

ZB6 3010108003

E/3 3010506001

#### 型号 Model 订货号 Order Number

JUT14-6 深灰色 (DK/GY) 3011601025  
蓝色 (BE) 3011601039

FBS2-6 3010503037  
FBS3-6 3010503042  
FBS10-6 3010503048

ZBFM8 3010505004

ZB8 3010108004

E/3 3010506001

# Industrial Distribution Terminal Blocks

## Spring type terminal series

工业配电接线端子 - 弹簧类接线端子系列



**JUT14-6/1-2/DK/GY** 三导线贯通接线端子  
Three-lead through-type wiring terminal

**JUT14-10/DK/GY** 二导线贯通接线端子  
Two-lead through-type wiring terminal

厚 / 宽 / 高	8.2/78/41.7/49.2			
Thickness/Width/Height	mm/mm/mm/mm			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
24-8	24-10	40	800	
IEC 60947-7-1				

厚 / 宽 / 高	10.2/69/50.25/57.75			
Thickness/Width/Height	mm/mm/mm/mm			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
16-6	16-6	57	800	
IEC 60947-7-1				

JUT14

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUT14-6/1-2	深灰色 (DK/GY) 3011601002	JUT14-10	深灰色 (DK/GY) 3011601044
FBS2-6	3010503037	JFBS2-10	3010503081
FBS3-6	3010503042	JFBS10-10	3010503117
FBS10-6	3010503048		
ZBFM8	3010505004		
ZB8	3010108004	ZB10	3010108005
E/3	3010506001	E/3	3010506001

# Industrial Distribution Terminal Blocks

## Spring type terminal series

### 工业配电接线端子 - 弹簧类接线端子系列



本系列端子默认颜色：黄绿两色（PE）

#### 特点

1. 单股导线（多股导线沾锡或加冷压头）直接插入；
2. 较螺钉端子接线时间节省 70%；
3. 震动环境防松脱

#### Advantage:

1. Solid wire plug-in connection;
2. Save 70% operation time than screw type connector;
3. Anti-vibration shock, antiloosening.

#### JUT14-1.5PE

#### 二导线贯通接线端子

#### Two-lead through-type wiring terminal

厚 / 宽 / 高 / 高 4.2/64.92/34/41.5

Thickness/Width/Height/ Height

刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)

Rigid cable Soft cable

24-14 24-16

IEC 60947-7-2

#### JUT14-2.5PE

#### 二导线贯通接线端子

#### Two-lead through-type wiring terminal

厚 / 宽 / 高 / 高 5.2/53.5/35.6/43.1

Thickness/Width/Height/ Height

刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)

Rigid cable Soft cable

24-12 24-14

IEC 60947-7-2

JUT14

#### 说明 Specification 简图 Schematic Drawing

弹簧型接线端子：可安装在 NS35 型导轨上。  
Spring clip type terminal block  
Can be installed on tracks NS35 type.

#### 型号 Model 订货号 Order Number

JUT14-1.5PE 黄 + 绿 (PE) 3011601024

#### 型号 Model 订货号 Order Number

JUT14-2.5PE 黄 + 绿 (PE) 3011601008

(1) 插拔式桥接件：用于端子中央实现横向桥接  
齿背绝缘处可标识可分：2-位、3-位、10-位  
Insert-pull type bridging component: used  
to realize crosswise bridging at center of  
terminal, the mark of rail insulation can be  
divided into: 2-bit, 3-bit, 10-bit.



FBS2-1.5 3010503029  
FBS3-1.5 3010503030  
FBS10-1.5 3010503031

FBS2-2.5 3010503028  
FBS3-2.5 3010503032  
FBS10-2.5 3010503033

(2) 分组隔板：用于端子组间的视角  
及电气隔离。  
Segment spacer: for visual and electric  
separation between neighboring  
terminal groups.



JAP14-2.5 3011601031

JAP14-2.5 3011601031

(3) 扁平标记条：共 10 条，每条 10 位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits  
per strip, it could be plugged in mark  
groove of terminal outer side for marking.



ZBFM4 3010505001

ZBFM5 3010505002

(4) 标记条：有横向和竖向两种字体，10 位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



ZB4 3010108001

ZB5 3010108003

(5) 终端固定件：对端子排终端其固定件作  
用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing  
fixed function on terminal rows's  
termination the, mark clamp and mark  
strip can be blocked onto it for marking



E/3 3010506001

E/3 3010506001

# Industrial Distribution Terminal Blocks

## Spring type terminal series

工业配电接线端子 - 弹簧类接线端子系列



**JUT14-2.5/1-2/PE** 三导线贯通接线端子  
Three-lead through-type wiring terminal

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 5.2/6.7.5/35.6/43.1  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
24-12 24-14  
IEC 60947-7-2

**JUT14-2.5/2-2/PE** 四导线贯通接线端子  
Four-lead through-type wiring terminal

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 5.2/8.1.5/35.6/43.1  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
24-12 24-14  
IEC 60947-7-2

**JUT14-4PE** 二导线贯通接线端子  
Two-lead through-type wiring terminal

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 6.2/5.3.5/35.6/43.1  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
24-10 24-12  
IEC 60947-7-2

JUT14

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUT14-2.5/1-2/PE 黄 + 绿 (PE)	3011601041	JUT14-2.5/2-2/PE 黄 + 绿 (PE)	3011601009	JUT14-4PE 黄 + 绿 (PE)	3011601010
FBS2-2.5	3010503028	FBS2-2.5	3010503028	FBS2-4	3010503034
FBS3-2.5	3010503032	FBS3-2.5	3010503032	FBS3-4	3010503035
FBS10-2.5	3010503033	FBS10-2.5	3010503033	FBS10-4	3010503036
		JAP14-2.5/2-2	3011601022	JAP14-2.5	3011601031
ZBFM5	3010505002	ZBFM5	3010505002	ZBFM6	3010505002
ZB5	3010108003	ZB5	3010108003	ZB6	3010108003
E/3	3010506001	E/3	3010506001	E/3	3010506001

# Industrial Distribution Terminal Blocks

## Spring type terminal series

### 工业配电接线端子 - 弹簧类接线端子系列



本系列端子默认颜色：黄绿两色（PE）

#### 特点

1. 单股导线（多股导线沾锡或加冷压头）直接插入；
2. 较螺钉端子接线时间节省 70%；
3. 震动环境防松脱

#### Advantage:

1. Solid wire plug-in connection;
2. Save 70% operation time than screw type connector;
3. Anti-vibration shock, antiloosening.

#### JUT14-4/1-2PE 三导线贯通接线端子 Three-lead through-type wiring terminal

厚 / 宽 / 高	6.2/67.5/35.6/43.1
Thickness/Width/Height	Height
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )
Rigid cable	Soft cable
24-12	24-14
IEC 60947-7-2	

#### JUT14-4/2-2PE 四导线贯通接线端子 Four-lead through-type wiring terminal

厚 / 宽 / 高	6.2/81.5/35.6/43.1
Thickness/Width/Height	Height
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )
Rigid cable	Soft cable
24-10	24-12
IEC 60947-7-2	

JUT14

#### 说明 Specification 简图 Schematic Drawing

弹簧型接线端子：可安装在 NS35 型导轨上。  
Spring clip type terminal block  
Can be installed on tracks NS35 type.

#### 型号 Model 订货号 Order Number

JUT14-4/1-2PE 黄 + 绿 (PE) 3011601043

#### 型号 Model 订货号 Order Number

JUT14-4/2-2PE 黄 + 绿 (PE) 3011601003

(1) 插拔式桥接件：用于端子中央实现横向桥接  
齿背绝缘处可标识可分：2-位、3-位、10-位  
Insert-pull type bridging component: used  
to realize crosswise bridging at center of  
terminal, the mark of rail insulation can be  
divided into: 2-bit, 3-bit, 10-bit.



FBS2-4 3010503034  
FBS3-4 3010503035  
FBS10-4 3010503036

FBS2-4 3010503034  
FBS3-4 3010503035  
FBS10-4 3010503036

(2) 分组隔板：用于端子组间的视角  
及电气隔离。  
Segment spacer: for visual and electric  
separation between neighboring  
terminal groups.



JAP14-2.5/2-2 3011601022

(3) 扁平标记条：共 10 条，每条 10 位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits  
per strip, it could be plugged in mark  
groove of terminal outer side for marking.



ZBFM6 3010505002

ZBFM6 3010505002

(4) 标记条：有横向和竖向两种字体，10 位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



ZB6 3010108003

ZB6 3010108003

(5) 终端固定件：对端子排终端其固定件作  
作用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing  
fixed function on terminal rows's  
termination the, mark clamp and mark  
strip can be blocked onto it for marking



E/3 3010506001

E/3 3010506001

# Industrial Distribution Terminal Blocks

## Spring type terminal series

工业配电接线端子 - 弹簧类接线端子系列



<p><b>JUT14-6PE</b>      二导线贯通接线端子 Two-lead through-type wiring terminal</p>	<p><b>JUT14-6/1-2PE</b>      三导线贯通接线端子 Three-lead through-type wiring terminal</p>	<p><b>JUT14-10PE</b>      二导线贯通接线端子 Two-lead through-type wiring terminal</p>
--	--	---

<p>厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height      8.2/61.2/41.2/48.7</p> <p>刚性导线 (mm<sup>2</sup>)    柔性导线 (mm<sup>2</sup>) Rigid cable          Soft cable</p> <p>24-8                  24-10</p> <p>IEC 60947-7-2</p>	<p>厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height      8.2/7/41.7/49.2</p> <p>刚性导线 (mm<sup>2</sup>)    柔性导线 (mm<sup>2</sup>) Rigid cable          Soft cable</p> <p>24-8                  24-10</p> <p>IEC 60947-7-2</p>	<p>厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height      10.2/69/50.25/57.75</p> <p>刚性导线 (mm<sup>2</sup>)    柔性导线 (mm<sup>2</sup>) Rigid cable          Soft cable</p> <p>16-6                  16-6</p> <p>IEC 60947-7-2</p>
---	--	---

JUT14

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUT14-6PE	黄 + 绿 (PE)    3011601026	JUT14-6/1-2PE	黄 + 绿 (PE)    3011601004	JUT14-10PE	黄 + 绿 (PE)    3011601045
FBS2-6	3010503037	FBS2-6	3010503037	JFBS2-10	3010503081
FBS3-6	3010503042	FBS3-6	3010503042	JFBS10-10	3010503117
FBS10-6	3010503048	FBS10-6	3010503048		
ZBFM8	3010505004	ZBFM8	3010505004		
ZB8	3010108004	ZB8	3010108004	ZB10	3010108005
E/3	3010506001	E/3	3010506001	E/3	3010506001



# INDUSTRIAL DISTRIBUTION TERMINAL BLOCKS


## 工业配电接线端子



### 螺钉类

端子一般主要有外壳，螺钉，压线框和导电片 4 大部分组成，接线时通过上紧螺钉，带动压线框向上移动，从而将导线与导电片紧密连接，是市面上最通用，应用最广泛的接线端子。外观美观大方；同时配备齐全的附件；端板，分组隔板，联络件，固定件，标记条等；可使用 U 型和 G 型两种导轨；接线可靠，安装方便，接线容量齐全。

### Screw model

This model terminal block mainly consists of 4 parts including shell, bolt, line-pressing frame, and conducting strip. When the bolt is tightened, the line-pressing frame will move upward, and the wire and conducting strip will get pressed and close contact. It is the most common and most widely used terminal block in the market. It has a nice appearance. It is also equipped with a complete set of accessory parts including the end plate, group separator, contact part, fixing part and tag etc. It fits 2 types of tracks: U type and G type. The line connecting is reliable, the installation is easy, and the connecting capacity is complete.

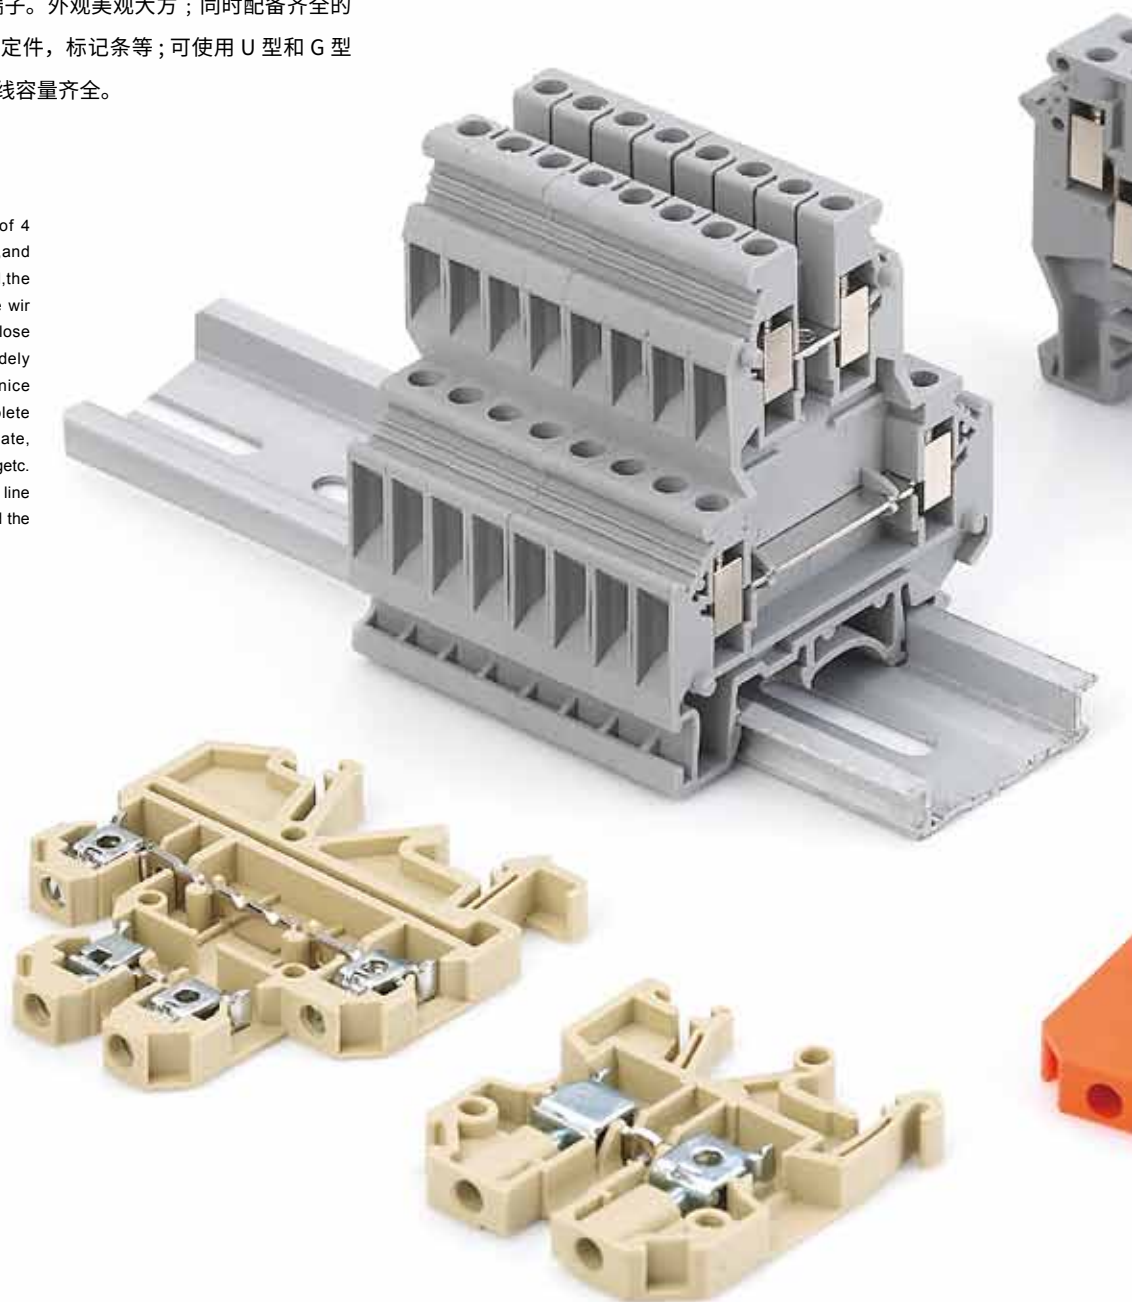

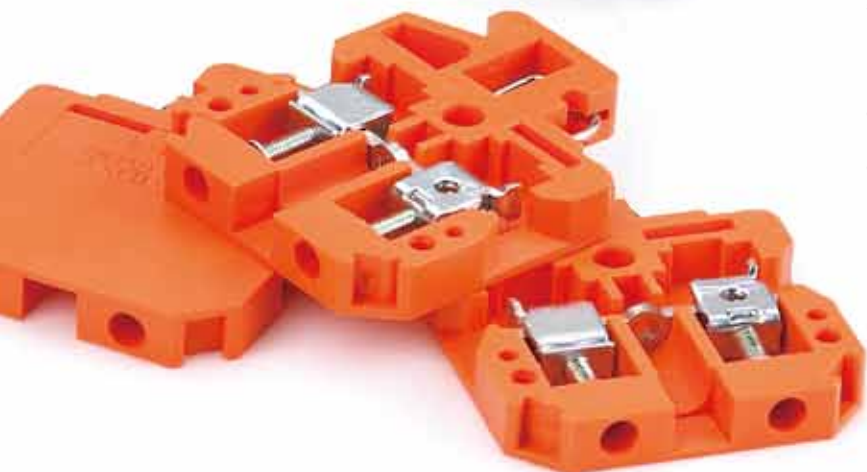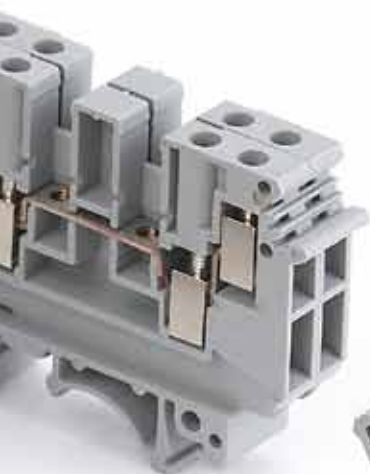

## 特点

- 端子具有通用安装脚能方便快速的安装在 U 型导轨 NS35 及 G 型导轨 NS32 上；
- 封闭型的螺钉引导孔即方便螺丝刀操作，又可防止螺丝旋松后跌落机外；
- 电位分配可通过接入端子中央的中心联络件或插入锥形接线孔的边插联络件来实现；
- 对多个截面的端子配备了通用附件，如：端板、分组隔板、隔片等；
- 绝缘外壳采用机械强度高、电气特性好、弹性极佳的进口工程塑料—聚酰胺（尼龙）66；
- 顶部二端采用白色标记采列，可实现统一标识。

## Advantage

- Terminal with universal mounting foot can conveniently and quickly installed in the U type guide rail NS35 and G type guide rail NS32;
- Screw closed guide hole is convenient screwdriver operation, and can prevent the screw loosening after dropping machine;
- Potential distribution by an access terminal central center contact piece or inserted into a conical connecting hole edge inserted contact element to realize;
- Terminal for a plurality of section is equipped with universal accessories, such as: end plate, separating plate, septa etc.;
- Insulated shell of high mechanical strength, good electrical properties, imported engineering plastics extremely flexible spear amides adopt (nylon)66;
- The top two ends are lined with white markings for uniform identification

# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)



本系列端子默认颜色: 灰色 (GY)  
支持客户定制颜色

### JUT1-1.5/GY

厚 / 宽 / 高	4.2/42.5/42/49.5		
Thickness/Width/Height	mm/mm/mm		
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)
Rigid cable	Soft cable		
AWG:26-16	0.14-1.5	0.14-1.5	17.5 500
最大负载电流: 17.5A (1.5mm <sup>2</sup> 刚性导线)			
Maximum load current:17.5A(1.5mm <sup>2</sup> rigid wire)			
IEC 60947-7-1			

JUT1

#### 实用特征

端子具有通用安装脚能方便快速的安装在 U 型导轨 NS35 及 G 型导轨 NS32 上;

封闭型的螺钉引导孔即方便螺丝刀操作, 又可防止螺丝旋松后跌落机外;

电位分配可通过接入端子中央的中心联络件或插入锥形接线孔的边插联络件来实现;

对多个截面的端子配备了通用附件, 如: 端板、分组隔板、隔片等;

绝缘外壳采用机械强度高、电气特性好、弹性极佳的进口工程塑料—聚酰胺 (尼龙) 66;

顶部二端采用白色标记采列, 可实现统一标识。

#### Features:

Terminals with general-purpose mounting feet, which enables quick installation on U shaped track NS35 and G shaped track NS32;

Closed bolt leading hole will not only facilitate operation of screwdrivers, also prevent the bolt from dropping out;

Electric potential distribution is realized by either connecting central adaptor to the center of terminal or inserting a side adaptor to the cone jack;

General auxiliaries, such as end plate, segment spacer, and spacer, are attached for terminal with multiple sections;

The insulating shell is made of imported engineering plastic-polyamide(Nylon)66, which is of high mechanical intensity, good electric property, and super flexibility;

Two ends on the top with white marking system to realize uniformed sign.


#### 说明 Specification 简图 Schematic Drawing

端子带通用安装在 NS32 型, 或 NS35 型导轨上。  
Terminal: with general-purpose mounting feet, can be installed on tracks NS32 or NS35

(1) 端板 End plate




(2) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。  
Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit



(3) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。  
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



(4) 绝缘隔片: 用于相邻联络件的电气隔离; 可事后插入; 不占导轨任何空间。  
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.



(5) 分组隔片: 用于端子组间的视角及电气隔离。  
Segment spacer: for visual and electric separation between neighboring terminal groups.



(6) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



(7) 标记夹: 用来对端子排进行标示, 卡在终端固定件上, 高度可调, 书写面积: 44x7 (JUT1 系列通用)  
Mark clip: for identification of terminals insert to terminal fastener, with adjustable height and writing area of 44x7 mm<sup>2</sup> (general used for JUT1 series)




(8) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定作用 (JUT1 系列作用)  
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT1 series)



型号 Model	订货号 Order Number
JUT1-1.5	灰色 (GY) 3010101001 米色 (CM) 3010101056 蓝色 (BE) 3010101171
G-JUT1-1.5/2.5B	3010102001
JEB2-1.5	3010103033
JEB3-1.5	3010103034
JEB10-1.5	3010103001
JAP	3010107001
ZB4	3010108001
KLM-A	3010109001
E/1	3010110001

# Industrial Distribution Terminal Blocks Screw type(Universal)

工业配电接线端子 - 螺钉类 (通用型)



**JUT1-2.5B/GY**

**JUT1-2.5/GY**

**JUT1-2.5/2-2/GY**

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	6.2/42.5/42/49.5			
刚性导线 (mm <sup>2</sup> ) Rigid cable	柔性导线 (mm <sup>2</sup> ) Soft cable	I (A)	U (V)	
0.2-4	0.2-2.5	32	690	
IEC 60947-7-1				

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	5.2/42.5/47/54.5			
刚性导线 (mm <sup>2</sup> ) Rigid cable	柔性导线 (mm <sup>2</sup> ) Soft cable	I (A)	U (V)	
0.2-4	0.2-2.5	24	800	
最大负载电流: 32A (4mm <sup>2</sup> 刚性导线) Maximum load current: 32A (4mm <sup>2</sup> rigid wire)				
IEC 60947-7-1				

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	5.2/42.5/47/54.5			
刚性导线 (mm <sup>2</sup> ) Rigid cable	柔性导线 (mm <sup>2</sup> ) Soft cable	I (A)	U (V)	
0.2-4	0.2-2.5	24	500	
IEC 60947-7-1				

JUT1

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUT1-2.5B	灰色 (GY)	3010101002	JUT1-2.5	灰色 (GY)	3010101003
	蓝色 (BE)	3010101072		蓝色 (BE)	3010101057
	灰色 (GY) -M10	3010101198		黑色 (BK)	3010101228
				棕色 (BR)	3010101334
		黄色 (YL)		3010101351	
G-JUT1-1.5/2.5B	3010102001	G-JUT1-2.5/10	3010102002	G-JUT1-2.5/10	
JFB2-4	3010103016	JFB2-2.5	3010103013	JFB2-4	3010103016
JFB3-4	3010103017	JFB3-2.5	3010103014	JFB3-4	3010103017
JFB10-4	3010103002	JFB10-2.5	3010103003	JFB10-4	3010103002
JEB2-4	3010104005	JEB2-2.5	3010104002	JEB2-4	3010104005
JEB3-4	3010104006	JEB3-2.5	3010104003	JEB3-4	3010104006
JEB10-4	3010104007	JEB10-2.5	3010104004	JEB10-4	3010104007
JS-KK3	3010106001	JS-K	3010106002	JS-K	3010106002
JAP	3010107001	JAP	3010107001	JAP	3010107001
ZB6	3010108002	ZB5	3010108003	ZB6	3010108002
KLM-A	3010109001	KLM-A	3010109001	KLM-A	3010109001
E/1	3010110001	E/1	3010110001	E/1	3010110001

# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)



### JUT1-4/GY

厚 / 宽 / 高	6.2/42.5/47/54.5		
Thickness/Width/Height	6.2/42.5/47/54.5		
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
Rigid cable	Soft cable	(A)	(V)
AWG:24-10	0.2-6	0.2-4	32 800
最大负载电流: 41A (6mm <sup>2</sup> 刚性导线)			
Maximum load current:41A(6mm <sup>2</sup> rigid wire)			
IEC 60947-7-1			

JUT1

### 说明 Specification 简图 Schematic Drawing

端子带通用安装在 NS32 型, 或 NS35 型导轨上。  
Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35

型号 Model	订货号 Order Number
JUT1-4	灰色 (GY) 3010101004
	蓝色 (BE) 3010101059
	黑色 (BK) 3010101073
	绿色 (GN) 3010101074
	白色 (MT) 3010101141
	红色 (RD) 3010101142

(1) 端板 End plate



G-JUT1-2.5/10 3010102002

(2) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。  
Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit




JFB2-4 3010103016  
JFB3-4 3010103017  
JFB10-4 3010103002

(3) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。  
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



JEB2-4 3010104005  
JEB3-4 3010104006  
JEB10-4 3010104007

(4) 绝缘隔片: 用于相邻联络件的电气隔离; 可事后插入; 不占导轨任何空间。  
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.



JS-K 3010106002

(5) 分组隔片: 用于端子组间的视角及电气隔离。  
Segment spacer: for visual and electric separation between neighboring terminal groups.



JAP 3010107001

(6) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



ZB6 3010108002

(7) 标记夹: 用来对端子排进行标示, 卡在终端固定件上, 高度可调, 书写面积: 44x7 (JUT1 系列通用)  
Mark clip: for identification of terminals insert to terminal fastener, with adjustable height and writing area of 44x7 mm<sup>2</sup> (general used for JUT1 series)



KLM-A 3010109001

(8) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定件作用 (JUT1 系列作用)  
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT1 series)



E/1 3010110001

# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)

可断电型接线端子分试验型接线端子和开关型接线端子。

Cut-off type wiring terminal is divided into test type wiring terminal and switch type wiring terminal

开关型接线端子：采用闸刀形式进行线路的通断操作，以便在线路检修和测量中迅速找故障并在无电压的情况下检修。该端子接触电阻小，载流量达 16A，闸刀钮用鲜橙标记，清晰醒目。

Switch-type wiring terminal: adopting switch-knife way to execute on-off operation of wire, which can find out obstacle fast in the process of wire impair and measurement, additionally, the examination and impair could be conducted under case of non-voltage. The contacted resistance of this terminal is small and the load current quantity can achieve 16A, the switch-knife is marked with fresh-orange and very clear.



JUT1

		JUT1-4/1-2/GY 一进二出接线端子 One-in two-out wiring terminal				JUT1-4K/GY 开关型接线端子 Switch-type wiring terminal			
		厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height		6.2/50.5/47/54.5		厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height		6.2/51/58.5/66	
		刚性导线 (mm <sup>2</sup> ) Rigid cable		柔性导线 (mm <sup>2</sup> ) Soft cable		刚性导线 (mm <sup>2</sup> ) Rigid cable		柔性导线 (mm <sup>2</sup> ) Soft cable	
		I U (A) (V)		I U (A) (V)		I U (A) (V)		I U (A) (V)	
		AWG:24-12 IEC 60947-7-1		02-4 02-4		AWG:24-12 IEC 60947-7-1		0.2-4 0.2-4	
说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
端子带通用安装在 NS32 型, 或 NS35 型导轨上。 Terminal:with general-purpose mounting feet,can be installed on tracks NS32 or NS35		JUT1-4/1-2	灰色 (GY)	3010101034	JUT1-4K	灰色 (GY)	3010101038		
(1) 端板 End plate		G-JUT1-4/1-2		3010102011					
(2) 中心联络件：用于端子中央，四线横向桥接，可分 2-位、3-位、5-位、10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into:2-digit,3-digit,5-digit,and 10-digit		JFB2-4 JFB3-4 JFB10-4		3010103016 3010103017 3010103002					
(3) 边插式联络件：全绝缘 2 位；全绝缘 3 位；全绝缘 10 位。 Side adaptor:Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.		JEB2-4 JEB3-4 JEB10-4		3010104005 3010104006 3010104007	JEB2-4 JEB3-4 JEB10-4		3010104005 3010104006 3010104007		
(4) 绝缘隔片：用于相邻联络件的电气隔离；可事后插入；不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.		JS-K JS-KK3		3010106002					
(5) 标记条：有横向和竖向两种字体，10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		ZB6		3010108002	ZB6		3010108002		

# Industrial Distribution Terminal Blocks Screw type(Universal)

工业配电接线端子 - 螺钉类 (通用型)






JUT1

### JUT1-4/2-2/GY 二进二出接线端子 Two-in two-out wiring terminal

### JUT1-4/2-2K/GY 双进双出开关型接线端子 Two-in two-out Switch-type wiring terminal

厚 / 宽 / 高 / 高	6.2/63.5/47/54.5			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:24-12	0.2-4	0.2-4	32	690
IEC 60947-7-1				

厚 / 宽 / 高 / 高	6.2/63.5/47/54.5			
Thickness/Width/Height/ Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:24-12	0.2-4	0.2-4	16	690
IEC 60947-7-1				

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
<p>端子带通用安装在 NS32 型, 或 NS35 型导轨上。 Terminal:with general-purpose mounting feet,can be installed on tracks NS32 or NS35</p>	JUT1-4/2-2	灰色 (GY) 蓝色 (BE)	JUT1-4/2-2K	灰色 (GY)
		3010101033 3010101077		3010101037
(1) 端板 End plate	G-JUT1-4/2-2	3010102010	G-JUT1-4/2-2	3010102010
<p>(2) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into:2-digit,3-digit,5-digit,and 10-digit</p> 	JFB2-4 JFB3-4 JFB10-4	3010103016 3010103017 3010103002		
<p>(3) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。 Side adaptor:Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.</p>	JEB2-4 JEB3-4 JEB10-4	3010104005 3010104006 3010104007	JEB2-4 JEB3-4 JEB10-4	3010104005 3010104006 3010104007
<p>(4) 绝缘隔片: 用于相邻联络件的电气隔离; 可事后插入; 不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.</p> 	JS-KK3	3010106001		
<p>(5) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.</p> 	ZB6	3010108002	ZB6	3010108002

# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)

由于从 JUT1-2.5 到 JUT1-10 所有端子的外型轮廓相同, 所以分组隔板或端板等附件都能通用。

For the terminals appearance out-line from JUT1-2.5 to JUT1-10 are same, so the grouping or header and other attachments could be universally used.



JUT1-6/GY

JUT1-6S/GY

JUT1-6/GY				JUT1-6S/GY			
厚 / 宽 / 高		8.2/42.5/47/54.5		厚 / 宽 / 高		8.2/72/51.5/59	
Thickness/Width/Height		↓ ↓ ↓ Height		Thickness/Width/Height		↓ ↓ ↓ Height	
刚性导线 (mm <sup>2</sup> )		柔性导线 (mm <sup>2</sup> )		刚性导线 (mm <sup>2</sup> )		柔性导线 (mm <sup>2</sup> )	
Rigid cable		Soft cable		Rigid cable		Soft cable	
AWG:24-8		0.2-10		AWG:20-8		0.5-10	
最大负载电流: 57A (10mm <sup>2</sup> 刚性导线)		0.2-6		IEC 60947-7-1		0.5-6	
Maximum load current:57A(10mm <sup>2</sup> rigid wire)		41 800				41 400	
IEC 60947-7-1							

JUT1

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
端子带通用安装在 NS32 型, 或 NS35 型导轨上。 Terminal:with general-purpose mounting feet, can be installed on tracks NS32 or NS35		JUT1-6	灰色 (GY) 3010101005 蓝色 (BE) 3010101060 棕色 (BR) 3010101336 灰色 (GY)-M101 3010101200 红色 (RD)-M101 3010101338 绿色 (GN)-M101 3010101339 蓝色 (YE)-M101 3010101340 黑色 (BK)-M101 3010101344 橙色 (OR)-M101 3010101356	JUT1-6S	灰色 (GY) 3010101041 红色 (RD) 3010101223 黄色 (YL) 3010101353 灰色 (GY)-M101 3010101216
(1) 端板 End plate		G-JUT1-2.5/10	3010102002	G-JUT1-6S	3010102014
(2) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into:2-digit,3-digit,5-digit,and 10-digit		JFB2-6 JFB3-6 JFB10-6	3010103022 3010103023 3010103005	JFB10-6S/S(短) JFB10-6S/L(长)	3010103048 3010103049
(3) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。 Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.		JEB2-6 JEB3-6 JEB10-6	3010104008 3010104009 3010104010	JEB2-6 JEB3-6 JEB10-6	3010104008 3010104009 3010104010
(4) 绝缘隔片: 用于相邻联络件的电气隔离; 可事后插入; 不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.		JS-K	3010106002		
(5) 分组隔片: 用于端子组间的视角及电气隔离。 Segment spacer: for visual and electric separation between neighboring terminal groups.		JAP	3010107001	JAP/6S	3010107004
(6) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		ZB8	3010108004	ZB8	3010108004
(7) 标记夹: 用来对端子排进行标示, 卡在终端固定件上, 高度可调, 书写面积: 44x7 (JUT1 系列通用) Mark clip: for identification of terminals insert to terminal fastener, with adjustable height and writing area of 44x7 mm <sup>2</sup> (general used for JUT1 series)		KLM-A	3010109001		
(8) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定件作用 (JUT1 系列作用) Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination(universal for JUT1 series)		E/1	3010110001		



# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)



JUT1-10/GY

JUT1-10/2/GY

厚 / 宽 / 高	10.2/42.5/47/54.5			
Thickness/Width/Height	10.2/42.5/47/54.5			
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
	Rigid cable	Soft cable	(A)	(V)
AWG:20-6	0.5-16	0.5-10	57	800
最大负载电流: 76A (16mm <sup>2</sup> 刚性导线)	Maximum load current:76A(16mm <sup>2</sup> rigid wire)			
IEC 60947-7-1	IEC 60947-7-1			

厚 / 宽 / 高	10.2/77.7/71.8/73			
Thickness/Width/Height	10.2/77.7/71.8/73			
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
	Rigid cable	Soft cable	(A)	(V)
AWG:20-6	0.5-16	0.5-10	57	500
最大负载电流: 76A (16mm <sup>2</sup> 刚性导线)	Maximum load current:76A(16mm <sup>2</sup> rigid wire)			
IEC 60947-7-1	IEC 60947-7-1			

JUT1

### 说明 Specification 简图 Schematic Drawing

端子带通用安装在 NS32 型, 或 NS35 型导轨上。  
Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35

型号 Model	订货号 Order Number
JUT1-10	灰色 (GY) 3010101006 蓝色 (BE) 3010101061 棕色 (BR) 3010101337 黄色 (YL) 3010101354

型号 Model	订货号 Order Number
JUT1-10/2	

(1) 端板 End plate



G-JUT1-2.5/10	3010102002
---------------	------------

G-JUT1-2.5/10	
---------------	--

(2) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。  
Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit



JFB2-10	3010103024
JFB3-10	3010103025
JFB10-10	3010103006

JFB2-10	3010103024
JFB3-10	3010103025
JFB10-10	3010103006


(3) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。  
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



JEB2-10	3010104011
JEB3-10	3010104012
JEB10-10	3010104013

JEB2-10	3010104011
JEB3-10	3010104012
JEB10-10	3010104013

(4) 绝缘隔片: 用于相邻联络件的电气隔离; 可事后插入; 不占导轨任何空间。  
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.



JSK	3010106002
-----	------------

JSK	3010106002
-----	------------

(5) 分组隔片: 用于端子组间的视角及电气隔离。  
Segment spacer: for visual and electric separation between neighboring terminal groups.



JAP	3010107001
-----	------------

JAP	3010107001
-----	------------

(6) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



ZB10	3010108005
------	------------

ZB10	3010108005
------	------------

(7) 标记夹: 用来对端子排进行标示, 卡在终端固定件上, 高度可调, 书写面积: 44x7 (JUT1 系列通用)  
Mark clip: for identification of terminals insert to terminal fastener, with adjustable height and writing area of 44x7 mm<sup>2</sup> (general used for JUT1 series)



KLM-A	3010109001
-------	------------

KLM-A	3010109001
-------	------------

(8) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定作用 (JUT1 系列作用)  
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT1 series)



E/1	3010110001
-----	------------

E/1	3010110001
-----	------------

# Industrial Distribution Terminal Blocks

## Spring type terminal series

工业配电接线端子 - 弹簧类接线端子系列



### JUT1-16/GY

### JUT1-35/GY

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 12.2/42.5/54/61.5

刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>) I U  
Rigid cable Soft cable (A) (V)

AWG:12-4 2.5-25 4-16 76 800

最大负载电流: 101A (25mm<sup>2</sup> 刚性导线)  
Maximum load current:101A(25mm<sup>2</sup> rigid wire)  
IEC 60947-7-1

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 15.2/50/62/69.5

刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>) I U  
Rigid cable Soft cable (A) (V)

AWG:14-2 2.5-35 2.5-35 125 1000

最大负载电流: 125A (35mm<sup>2</sup> 刚性导线)  
Maximum load current:125A(35mm<sup>2</sup> rigid wire)  
IEC 60947-7-1

型号 Model	订货号 Order Number
JUT1-16	灰色 (GY) 3010101007
	蓝色 (BE) 3010101062
	黑色 (BK) 3010101224
	棕色 (OR) 3010101225
	红色 (RD) 3010101341
	绿色 (GN) 3010101342
黄色 (YE) 3010101343	

型号 Model	订货号 Order Number
JUT1-35	灰色 (GY) 3010101008
	蓝色 (BE) 3010101063
	米黄色 (CM) 3010101115
	灰色 (GY)-M101 3010101208

G-JUT1-16 3010102003

封闭型外壳, 不用端板。  
Sealed outer-case, don't need end plate

JFB2-16 3010103026  
JFB3-16 3010103027  
JFB10-16 3010103007

JFB2-35 3010103008  
JFB3-35 3010103009  
JFB10-35 3010103012

JEB2-16 3010104014  
JEB3-16 3010104015  
JEB10-16 3010104001

JEB2-35 3010104016  
JEB3-35 3010104017  
JEB10-35 3010104018

JSK 3010106002

JSK 3010106002

JAP 3010107001

ZB12 3010108128

ZB16 3010108150

KLM-A 3010109001

KLM-A 3010109001

E/1 3010110001

E/1 3010110001

JUT1

# Industrial Distribution Terminal Blocks Screw type(Universal)








## 工业配电接线端子 - 螺钉类 (通用型)



### JUT1-35B/GY

厚 / 宽 / 高	15.2/56/52/59.5		
Thickness/Width/Height	15.2/56/52/59.5		
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I U
	Rigid cable	Soft cable	(A) (V)
AWG:14-2	2.5-35	2.5-35	125 800
IEC 60947-7-1			

JUT1

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number
端子带通用安装在 NS32 型, 或 NS35 型导轨上。 Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35		JUT1-35B	灰色 (GY) 3010101022
(1) 中心联络件: 用于端子中央, 实现横向桥接, 螺钉头带绝缘圈, 桥前需将外壳的隔片打通。 Central adaptor: used at the center of terminal to realize crosswise bridging, and the screw head has insulation circle, the outer-case isolation slices should be get through before bridging	2 位  3 位 	JFB2-35 JFB3-35 JFB10-35	3010103008 3010103009 3010103012
(2) 边插式联络件: 全绝缘。插入压线框中, 并安装在端子绝缘外壳上。 Side adaptor: The whole-insulation is inserted into wire-pressing frame, additionally, it should be blocked onto terminal's insulation outer-case.	2 位  3 位 	JEB2-35 JEB3-35 JEB10-35	3010104016 3010104017 3010104018
(3) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定作用 (JUT1 系列通用) Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT1 series)		E/1	3010110001
(4) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		ZB16	3010108150
(5) 标记端子: 用来对端子排进行标示, 可安装在 型, 或 型导轨上, 端子带插入式标记条, 书写面积: 44×17mm <sup>2</sup> (标记端子 JUT1 系列产品通用) Mark terminal: used to mark terminal row, it can be installed on the type and type track, the terminal owns inserted type mark strip with writing area of 44×17 mm <sup>2</sup> (universal for series product with JUT1 mark terminal)		JUT1-B1	3010101054

# Industrial Distribution Terminal Blocks Screw type(Universal)

工业配电接线端子 - 螺钉类 (通用型)








JUT1-50/GY

JUT1-95/GY

厚 / 宽 / 高	20.2/71.3/77.2/84.7			
Thickness/Width/Height	20.2/71.3/77.2/84.7			
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
	Rigid cable	Soft cable	(A)	(V)
AWG:6-0	16-50	25-50	150	1000
最大负载电流: 150A (50mm <sup>2</sup> 刚性导线)				
Maximum load current:150A(50mm <sup>2</sup> rigid wire)				
IEC 60947-7-1				

厚 / 宽 / 高	26/83.6/91.6/99.1			
Thickness/Width/Height	26/83.6/91.6/99.1			
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
	Rigid cable	Soft cable	(A)	(V)
AWG:24-10	25-95	35-95	232	1000
最大负载电流: 232A				
Maximum load current:232A				
IEC 60947-7-1				

JUT1

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
<p>端子带通用安装在 NS32 型, 或 NS35 型导轨上。 Terminal:with general-purpose mounting feet,can be installed on tracks NS32 or NS35</p>	JUT1-50	灰色 (GY) 蓝色 (BE)	JUT1-95	灰色 (GY) 蓝色 (BE)
<p>(1) 中心联络件: 用于端子中央, 实现横向桥接, 螺钉头带绝缘圈, 桥前需将外壳的隔片打通。 Central adaptor:used at the center of terminal to realize crosswise bridging, and the screw head has insylation circle, the outer-case isolation slices should be get through before bridging</p>  <p>2 位</p>  <p>3 位</p>	JFB2-50 JFB3-50 JFB10-35	3010103010 3010103011 3010103032		
<p>(2) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定件作用 (JUT1 系列通用) Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination(universal for JUT1 series)</p> 	E/1	3010110001	E/1	3010110001
<p>(3) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.</p> 	ZB16	3010108150	ZB10	3010108150
<p>(4) 标记端子: 用来对端子排进行标示, 可安装在 型, 或 型导轨上, 端子带插入式标记条, 书写面积: 44×17mm<sup>2</sup> (标记端子 JUT1 系列产品通用) Mark terminal: used to mark terminal row, it can be installed on the type and type track, the terminal owns inserted typemark strip with writing area of 44×17 mm<sup>2</sup>(universal for series product with JUT1 mark terminal)</p> 	JUT1-B1	3010101054	JUT1-B1	3010101054

# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)



### JUT1-150/GY

### JUT1-240/GY

厚 / 宽 / 高	31.6/101/112.5/120			
Thickness/Width/Height	31.6/101/112.5/120			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:2-300	35-150	50-150	309	1000
最大负载电流: 309A (150mm <sup>2</sup> 刚性导线)				
Maximum load current:309A(150mm <sup>2</sup> rigid wire)				
IEC 60947-7-1				

厚 / 宽 / 高	26/83.6/91.6/99.1			
Thickness/Width/Height	26/83.6/91.6/99.1			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:00-500	70-240	70-240	415	1000
最大负载电流: 415A (240mm <sup>2</sup> 刚性导线)				
Maximum load current:415A(240mm <sup>2</sup> rigid wire)				
IEC 60947-7-1				

JUT1

#### 说明 Specification 简图 Schematic Drawing

端子带通用安装在 NS32 型, 或 NS35 型导轨上。  
Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35

(1) 中心联络件: 用于端子中央, 实现横向桥接, 螺钉头带绝缘圈, 桥前需将外壳的隔片打通。  
Central adaptor: used at the center of terminal to realize crosswise bridging, and the screw head has insulation circle, the outer-case isolation slices should be get through before bridging



(2) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定件作用 (JUT1 系列通用)  
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT1 series)



(3) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



(4) 标记端子: 用来对端子排进行标识, 可安装在 型, 或 型导轨上, 端子带插入式标记条, 书写面积: 44×17mm<sup>2</sup> (标记端子 JUT1 系列产品通用)  
Mark terminal: used to mark terminal row, it can be installed on the type and type track, the terminal owns inserted type mark strip with writing area of 44×17 mm<sup>2</sup> (universal for series product with JUT1 mark terminal)



#### 型号 Model 订货号 Order Number

JUT1-150	灰色 (GY)	3010101011
	蓝色 (BE)	3010101065

E/1	3010110001
-----	------------

ZB16	3010108150
------	------------

JUT1-B1	3010101054
---------	------------

#### 型号 Model 订货号 Order Number

JUT1-240	灰色 (GY)	3010101012
	蓝色 (BE)	3010101135

E/1	3010110001
-----	------------

ZB16	3010108150
------	------------

JUT1-B1	3010101054
---------	------------

# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)



JUT1 双层接线端子：具有通用端子在相同的空间位置上两倍的接线容量，其上下两层在位置上错开了2.5 mm 的空间，不仅在视觉上条理分明，同时在上层接线的情况下，螺丝刀能在下层区域内很方便的完成接线作业。

JUT1 double-layer wiring terminal: it owns twice wiring capacity of universal terminal at the same space position, its upper-lower two storey has 2.5 mm space staggered, therefore, not only is the visual angle clear, but also the screwdriver can simply finish wiring operation at lower space in case of being connected in upper levels.

### JUT1-2.5/2/GY

#### 双层接线端子 Double-layer type wiring terminal

厚 / 宽 / 高	5.2/56/62/69.5	
Thickness/Width/Height	5.2/56/62/69.5	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I U
Rigid cable	Soft cable	(A) (V)
AWG:24-12	0.2-4	0.2-2.5 24 500
IEC 60947-7-1		

### JUT1-2.5/2L/GY

#### 双层互连接线端子 Double-layer interconnection terminal

厚 / 宽 / 高	5.2/56/62/69.5	
Thickness/Width/Height	5.2/56/62/69.5	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I U
Rigid cable	Soft cable	(A) (V)
AWG:24-12	0.2-4	0.2-2.5 24 500
IEC 60947-7-1		

JUT1

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
端子带通用安装在 NS32 型, 或 NS35 型导轨上。 Terminal:with general-purpose mounting feet,can be installed on tracks NS32 or NS35	JUT1-2.5/2	灰色 (GY) 3010101025	JUT1-2.5/2L	灰色 (GY) 3010101026
(1) 端板 End plate	G-JUT1-2.5/4	3010102004	G-JUT1-2.5/4	3010102004
(2) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit	JFB2-2.5 JFB3-2.5 JFB10-2.5	3010103013 3010103014 3010103003	JFB2-2.5 JFB3-2.5 JFB10-2.5	3010103013 3010103014 3010103003
(3) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。 Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.	JEB2-2.5 JEB3-2.5 JEB10-2.5	3010104002 3010104003 3010104004	JEB2-2.5 JEB3-2.5 JEB10-2.5	3010104002 3010104003 3010104004
(4) 绝缘隔片: 用于相邻联络件的电气隔离; 可事后插入; 不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.	JS-KK3	3010106001	JS-KK3	3010106001
(5) 补偿端板: 与普通端子相邻排列时, 用来抵消层间错位, 厚 2.5mm。 Compensation header: when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm	DG-JUT1-2.5/4	3010102005	DG-JUT1-2.5/4	3010102005
(6) 补偿端板: 与普通端子相邻排列时, 用来抵消层间错位, 厚 2.5mm。 Compensation header: when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm	DP-JUT1-2.5/4	3010102006	DP-JUT1-2.5/4	3010102006
(7) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	ZB5	3010108003	ZB5	3010108003

# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)



### JUT1-4/2/GY

双层接线端子 Double-layer type wiring terminal

### JUT1-4/2L/GY

双层互连接线端子 Double-layer interconnection terminal

厚 / 宽 / 高	6.2/56/62/69.5			
Thickness/Width/Height	6.2/56/62/69.5			
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)
	Rigid cable	Soft cable	(A)	(V)
AWG:24-12	0.2-4	0.2-4	32	500
IEC 60947-7-1				

厚 / 宽 / 高	6.2/56/62/69.5			
Thickness/Width/Height	6.2/56/62/69.5			
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)
	Rigid cable	Soft cable	(A)	(V)
AWG:24-12	0.2-4	0.2-4	32	500
IEC 60947-7-1				

JUT1

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
端子带通用安装在 NS32 型, 或 NS35 型导轨上。 Terminal:with general-purpose mounting feet,can be installed on tracks NS32 or NS35	JUT1-4/2	灰色 (GY) 3010101027	JUT1-4/2L	灰色 (GY) 3010101028
(1) 端板 End plate	G-JUT1-2.5/4	3010102004	G-JUT1-2.5/4	3010102004
(2) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit	JFB2-4 JFB3-4 JFB10-4	3010103016 3010103017 3010103002	JFB2-4 JFB3-4 JFB10-4	3010103016 3010103017 3010103002
(3) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。 Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.	JEB2-4 JEB3-4 JEB10-4	3010104005 3010104006 3010104007	JEB2-4 JEB3-4 JEB10-4	3010104005 3010104006 3010104007
(4) 绝缘隔片: 用于相邻联络件的电气隔离; 可事后插入; 不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.	JS-KK3	3010106001	JS-KK3	3010106001
(5) 补偿端板: 与普通端子相邻排列时, 用来抵消层间错位, 厚 2.5mm。 Compensation header: when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm	DG-JUT1-2.5/4	3010102005	DG-JUT1-2.5/4	3010102005
(6) 补偿端板: 与普通端子相邻排列时, 用来抵消层间错位, 厚 2.5mm。 Compensation header: when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm	DP-JUT1-2.5/4	3010102006	DP-JUT1-2.5/4	3010102006
(7) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.	ZB6	3010108002	ZB6	3010108002

# Industrial Distribution Terminal Blocks Screw type(Universal)

工业配电接线端子 - 螺钉类 (通用型)



## JUT1-2.5/2Q/GY 上下层均可桥接

Could bridge-connected at upper or lower layer

厚 / 宽 / 高 \ 高 Thickness/Width/Height/ \ Height	5.2/67/62/69.5			
刚性导线 (mm <sup>2</sup> ) Rigid cable	柔性导线 (mm <sup>2</sup> ) Soft cable	I (A)	U (V)	
AWG:24-12	0.2-4	0.2-2.5	24	500
IEC 60947-7-1				

## JUT1-4/2Q/GY 上下层均可桥接

Could bridge-connected at upper or lower layer

厚 / 宽 / 高 \ 高 Thickness/Width/Height/ \ Height	6.2/67/62/69.5			
刚性导线 (mm <sup>2</sup> ) Rigid cable	柔性导线 (mm <sup>2</sup> ) Soft cable	I (A)	U (V)	
AWG:24-12	0.2-4	0.2-4	32	500
IEC 60947-7-1				

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUT1-2.5/2Q	灰色 (GY) 3010101029	JUT1-4/2Q	灰色 (GY) 3010101030
G-JUT1-2.5/4Q	3010102007	G-JUT1-2.5/4Q	3010102007
JFBN2-2.5	3010103062	JFB2-4	3010103016
JFBN3-2.5	3010103067	JFB3-4	3010103017
JFBN10-2.5	3010103004	JFB10-4	3010103002
JEB2-2.5	3010104002	JEB2-4	3010104005
JEB3-2.5	3010104003	JEB3-4	3010104006
JEB10-2.5	3010104004	JEB10-4	3010104007
JS-KK3	3010106001	JS-KK3	3010106001
DP-JUT1-2.5/4Q	3010102009	DP-JUT1-2.5/4Q	3010102009
ZB5	3010108003	ZB6	3010108002

JUT1



# 应用领域广泛... 应用经验丰富...



## 汽车制造业

汽车工业中连续生产线上所使用的生产设备都很重要。UTL产品为设备提供了可靠性。无螺钉连接技术可以应付特殊车辆所提出的苛刻要求。如轨装式接线端子、端子排、MCS多用途连接器系列在汽车制造行业中具有非常高的可应用性：如用在冲压、车架、制造、组装以及喷漆车间的开关控制柜中。抗振动、免维护的笼式弹簧连接技术可节省双倍费用；布线时节约大量时间；同时免去定时的维护工作。

## 机械设备

制造机械设备常常是用于出口，并且在设备到达后短期内就要运行起来。经过长时间的运输过程后，这些机械设备必须能马上投入使用而不必花费时间和精力去检查接线是否松动。

## 楼宇自动化

现代和创新的楼宇技术要求在费用、灵活性以及拓展方面能够有更多的空间。快速、灵活、免维修等特性是一个项目成功实施和运转的关键。

- UTL适用于楼宇自动化中的接插式连接。是专业安装过程中的即插即用式解决方案。
- UTL用于建筑物布线的紧凑型轨装式接线端子。
- UTL建筑物电气安装用连接器，是建筑物布线领域的经典产品。接线盒用导线连接器和照明器具用连接器保证了快速、可靠的连接。

## 过程控制

过程和工程设备需要具备极高的灵活性、实用性及安全可靠性。组件若在爆炸危险领域应用就必须通过相关认证。设备的安置也要灵活，这样才能满足不同的应用要求。使用UTL产品可以确保系统的安全可靠。

## 电力应用

发电行业的主要目的就是对企业和个人家庭进行可靠、稳定的供电。而UTL产品可以为此提供非常高的质量保证和安全保障。在日趋激烈的行业竞争中，经济因素在决策过程中扮演着日益重要的角色。快速安装、免维护和可靠性，UTL都可以做到。在数十年的设备运行过程中都能维持绝对的可靠性、耐久性、且便于维护、这是在各种应用环境中对连接器产品的最高要求，此外，在户外环境中通过配电柜可以抵御气候带来的影响。

## 交通

各种领域的交通设备都有着共同的特点：极端的环境影响着元器件的应用。对于客车车辆应用，元件使用环境温度一般都在-40℃到+85℃；对于船舶应用，元件要承受强烈的震动；而在电梯应用中，大量的承载也对元件产生强烈的震动冲击。在很多情况下，这些不良影响会一起发生。但交通设备不能因为接线端子松动这样的小问题而给乘客造成不便，如导致延误或被困电梯等事故。

# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)

实现小型化是端子发展的必然趋势，MBK 小型端子的特点是结构紧凑，可以很方便地实现空间，电流与截面的最优组合。

The miniaturization is doomed to be the development trend of terminal, MBK miniature terminal owns characteristics of compact structure, which would realize simply the best combination of space, current and section



### JUT1-2.5E/GY

### JUT1-4E/GY

JUT1-2.5E/GY				JUT1-4E/GY			
厚 / 宽 / 高		5.2/28/32		厚 / 宽 / 高		6.2/2	
Thickness/Width/Height				Thickness/Width/Height			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)
Rigid cable	Soft cable			Rigid cable	Soft cable		
AWG:24-12	0.2-4	0.2-2.5	24 380	AWG:24-10	0.2-6	0.2-4	32 500
IEC 60947-7-1				IEC 60947-7-1			

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
端子带通用安装在 NS32 型, 或 NS35 型导轨上。 Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35.		JUT1-2.5E	灰色 (GY) 3010101042	JUT1-4E	灰色 (GY) 3010101043
(1) 端板 End plate		G-JUT1-2.5/4E	3010102015	G-JUT1-2.5/4E	3010102015
(2) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit		JFB2-2.5 JFB3-2.5 JFB10-2.5	3010103013 3010103014 3010103003	JFB2-4 JFB3-4 JFB10-4	3010103016 3010103017 3010103002
(3) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。 Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.		JEB2-2.5 JEB3-2.5 JEB10-2.5	3010104002 3010104003 3010104004	JEB2-4 JEB3-4 JEB10-4	3010104005 3010104006 3010104007
(4) 分组隔片: 用于端子组间的视角及电气隔离。 Segment spacer: for visual and electric separation between neighboring terminal groups.		JAP-E		JAP-E	
(5) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		ZB5	3010108003	ZB6	3010108002
(6) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定作用 (JUT2 系列通用) Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT2 series)		E/1E	3010110002	E/1E	3010110002
(7) 安装导轨 (NS15/5.5) Installment track (NS15/5.5)		NC15/5.5-STEEL	3010113003	NC15/5.5-STEEL	3010113003

JUT1

# Screw Type Ground terminal(Universal)

## 螺钉类接地端子 (通用型)



本系列端子默认颜色: 黄绿两色 (PE)

### JUT1-1.5PE

厚 / 宽 / 高 \ 高 Thickness/Width/Height/ \ Height	4.2/42.5/42/49.5	
刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) Rigid cable Soft cable	0.14-1.5	0.14-1.5
AWG:26-16	IEC 60947-7-2	

JUT1

JUT1 通用型接地端子系列产品主要用于接地功能, 或接零功能, 具有相应规格接线端子的电流承载能力。其低接触电阻, 防腐蚀连接点, 黄绿标志均能满足有关技术标准的规定。

JUT1 universal landing terminal serminal series product is mainly for landing or connecting to neutral,it possesses current load capabilitu of corresponding specification wiring terminal.It's low-connection resistance,anti-corrosion connection point and yellow/green mark all can meet the regulated demand of relative technical standard.

### 说明 Specification 简图 Schematic Drawing

接地端子: 带黄绿色绝缘外壳, 可安装在 NS32 □>型, 或 NS35 □>型导轨上。  
Landing terminal:with yellow/green insulation outer-case, it can be installed in the NS32 □> type or NS35 □> type track.

(1) 边插式联络件: 全绝缘 2 位;  
全绝缘 3 位; 全绝缘 10 位。  
Side adaptor:Full insulation in 2 digit. Full insulation.in 3 digit. Full insulation in 10 digit.



(2) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



### 型号 Model 订货号 Order Number

JUT1-1.5PE 黄 + 绿 (PE) 3010101013

ZB4 3010108001



### JUT1-2.5B/PE

### JUT1-2.5PE

### JUT1-4PE

厚 / 宽 / 高 \ 高 Thickness/Width/Height/ \ Height	6.2/42.5/52/49.5	
刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) Rigid cable Soft cable	0.2-4	0.2-2.5
AWG:24-12	IEC 60947-7-2	

厚 / 宽 / 高 \ 高 Thickness/Width/Height/ \ Height	5.2/42.5/47/54.5	
刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) Rigid cable Soft cable	0.2-4	0.2-2.5
AWG:24-12	IEC 60947-7-2	

厚 / 宽 / 高 \ 高 Thickness/Width/Height/ \ Height	6.2/42.5/47/54.5	
刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) Rigid cable Soft cable	0.2-6	0.2-4
AWG:24-10	IEC 60947-7-2	

### 型号 Model 订货号 Order Number

JUT1-2.5B/PE 黄 + 绿 (PE) 3010101014

### 型号 Model 订货号 Order Number

JUT1-2.5PE 黄 + 绿 (PE) 3010101015

### 型号 Model 订货号 Order Number

JUT1-4PE 黄 + 绿 (PE) 3010101016

JEB2-4 3010104005  
JEB3-4 3010104006  
JEB10-4 3010104007

JEB2-2.5 3010104002  
JEB3-2.5 3010104003  
JEB10-2.5 3010104004

JEB2-4 3010104005  
JEB3-4 3010104006  
JEB10-4 3010104007

ZB6 3010108002

ZB5 3010108003

ZB6 3010108002

# Screw Type Ground terminal(Universal)

## 螺钉类接地端子 (通用型)



**JUT1-6PE**

**JUT1-10PE**

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 8.2/42.5/47/54.5  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
AWG:24-8 0.2-10 0.2-6  
IEC 60947-7-2

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 10.2/42.5/47/54.5  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
AWG:20-6 0.5-16 0.5-10  
IEC 60947-7-2

**说明 Specification 简图 Schematic Drawing**

接地端子: 带黄绿色绝缘外壳, 可安装在 NS32 型, 或 NS35 型导轨上。  
Landing terminal: with yellow/green insulation outer-case, it can be installed in the NS32 type or NS35 type track.

(1) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。  
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



(2) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



**型号 Model 订货号 Order Number**

JUT1-6PE 黄 + 绿 (PE) 3010101017

JEB2-6 3010104008  
JEB3-6 3010104009  
JEB10-6 3010104010

ZB8 3010108004

**型号 Model 订货号 Order Number**

JUT1-10PE 黄 + 绿 (PE) 3010101018

JEB2-10 3010104011  
JEB3-10 3010104012  
JEB10-10 3010104013

ZB10 3010108005



**JUT1-16PE**

**JUT1-35PE**

**JUT1-50PE**

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 12.2/42.5/54/61.5  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
AWG:12-4 2.5-25 4-16  
IEC 60947-7-2

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 12.5/50/62/69.5  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
AWG:14-2 2.5-35 2.5-35  
IEC 60947-7-2

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 20/70.5/83.5/91  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
AWG:6-0 16-50 25-50  
IEC 60947-7-2

**型号 Model 订货号 Order Number**

JUT1-16PE 黄 + 绿 (PE) 3010101019  
黄 + 绿 (PE)-M101 3010101211

JEB2-16 3010104014  
JEB3-16 3010104015  
JEB10-16 3010104001

ZB12 3010108150

**型号 Model 订货号 Order Number**

JUT1-35PE 黄 + 绿 (PE) 3010101020  
黄 + 绿 (PE)-M101 3010101214

JEB2-35 3010104016  
JEB3-35 3010104017  
JEB10-35 3010104018

ZB16 3010108150

**型号 Model 订货号 Order Number**

JUT1-50PE 黄 + 绿 (PE) 3010101021

ZB16 3010108150

JUT1

# Screw Type Ground terminal(Universal)

## 螺钉类接地端子 (通用型)



### JUT1-2.5E/PE

小型接地端子 Miniature landing terminal

厚 / 宽 / 高	4.2/42.5/42/49.5	
Thickness/Width/Height	mm / Height	
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )
	Rigid cable	Soft cable
AWG:24-12	0.2-4	0.2-2.5
IEC 60947-7-2		

JUT1

JUT1 通用型接地端子系列产品主要用于接地功能, 或接零功能, 具有相应规格接线端子的电流承载能力。其低接触电阻, 防腐蚀连接点, 黄绿标志均能满足有关技术标准的规定。

JUT1 universal landing terminal serminal series product is mainly for landing or connecting to neutral,it possesses current load capabilitu of corresponding specification wiring terminal.It's low-connection resistance,anti-corrosion connection point and yellow/green mark all can meet the regulated demand of relative technical standard.

#### 说明 Specification 简图 Schematic Drawing

接地端子: 带黄绿色绝缘外壳, 可安装在 NS32 型, 或 NS35 型导轨上。  
Landing terminal:with yellow/green insulation outer-case, it can be installed in the NS32 type or NS35 type track.

(1) 边插式联络件: 全绝缘 2 位;  
全绝缘 3 位; 全绝缘 10 位。  
Side adaptor:Full insulation in  
2 digit. Full insulation.in 3 digit.  
Full insulation in 10 digit.



(3) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



#### 型号 Model 订货号 Order Number

JUT1-2.5E/PE 黄 + 绿 (PE) 3010101045  
可安装在 NS15 型导轨上  
can be insttled on tracks NS15 type

JEB2-2.5 3010104002  
JEB3-2.5 3010104003  
JEB10-2.5 3010104004

ZB5 3010108003



### JUT1-4/2-2PE

二进二出接地端子 Two-in two-out landing terminal

### JUT1-35B/PE

厚 / 宽 / 高	6.2/63.5/47/54.5	
Thickness/Width/Height	mm / Height	
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )
	Rigid cable	Soft cable
AWG:24-12	0.2-4	0.2-4
IEC 60947-7-2		

厚 / 宽 / 高	15.2/55/51/58.5	
Thickness/Width/Height	mm / Height	
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )
	Rigid cable	Soft cable
AWG:14-2	2.5-35	2.5-35
IEC 60947-7-2		

#### 说明 Specification 简图 Schematic Drawing

接地端子: 带黄绿色绝缘外壳, 可安装在 NS32 型, 或 NS35 型导轨上。  
Landing terminal:with yellow/green insulation outer-case, it can be installed in the NS32 type or NS35 type track.

(1) 边插式联络件: 全绝缘 2 位;  
全绝缘 3 位; 全绝缘 10 位。  
Side adaptor:Full insulation in  
2 digit. Full insulation.in 3 digit.  
Full insulation in 10 digit.



(3) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



#### 型号 Model 订货号 Order Number

JUT1-4/2-2PE 黄 + 绿 (PE) 3010101035

JEB2-4 3010104005  
JEB3-4 3010104006  
JEB10-4 3010104007

ZB6 3010108002

#### 型号 Model 订货号 Order Number

JUT1-35BPE 黄 + 绿 (PE) 3010101024

JEB2-35 3010104016  
JEB3-35 3010104017  
JEB10-35 3010104018

ZB16 3010108150

# Industrial Distribution Terminal Blocks

## Fuse type terminal series

### 工业配电接线端子 - 保险丝型端子系列

本系列端子默认颜色: 黑色 (BK)  
支持客户定制颜色。

JUT1-4RD 保险丝形接线端子: 采用分断悬壁来接入 G 型保险丝, 操作十分方便, 外壳采用全封闭, 安全可靠, 带发光显示的端子会给出保险丝的通断信号。该类端子的电流由安装的保险丝决定, 电压由选择的发光显示决定。

JUT1-4RD Fuse-type wiring terminal series: adopting broken bracket to connect into G type fuse without any difficulty, and the outer-case adopts whole-seal structure with security and reliability properties, the luminous terminal would give on-off signal of fuse. The current of this type terminal is determined by installed fuse, and the voltage is determined by selected luminous display.



#### JUT1-4RD/BK

##### 保险丝型接线端子 Fuses-type wiring terminal

厚 / 宽 / 高	8.2/7.2.5/56.5/64		
Thickness/Width/Height	8.2/7.2.5/56.5/64		
适用于 G 型保险丝规格	G type fuse specification 5×25		
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	U
	Rigid cable	Soft cable	(V)
AWG:24-12	0.2-4	0.2-4	AC 800
IEC 60947-7-1			

#### JUT1-10RD/BK

##### 螺帽式保险丝端子 Nur fuse-type terminal

厚 / 宽 / 高	12/6/2/59/66.5		
Thickness/Width/Height	12/6/2/59/66.5		
适用于 G 型保险丝规格	G type fuse specification 5×25		
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	U
	Rigid cable	Soft cable	(V)
AWG:20-6	0.5-16	0.5-10	AC 800
IEC 60947-7-1			

#### 说明 Specification 简图 Schematic Drawing

端子带通用安装在 NS32 型, 或 NS35 型导轨上。  
Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35

#### 型号 Model 订货号 Order Number

JUT1-4RD	黑色 (BK)	3010101031
	灰色 (GY)	3010101071
	绿色 (GN)	3010101121
	红色 (RD)	3010101122
	黄色 (YE)	3010101123

#### 型号 Model 订货号 Order Number

JUT1-10RD	黑色 (BK)	3010101032
	灰色 (GY)	3010101203

JUT1-4RD/LED24	黑色 (BK)	3010101047
带发光显示适用于电压	灰色 (GY)	3010101331
the product with luminous display is applied to voltage of AC/DC:15-30V		
电流 current: 3.5-8.1mA		

JUT1-10RD/LED24	黑色 (BK)	3010101049
带发光显示适用于电压		
the product with luminous display is applied to voltage of AC/DC:15-30V		
电流 current: 1-2.5mA		

JUT1-4RD/LA250	黑色 (BK)	3010101048
带发光显示适用于电压	灰色 (GY)	3010101078
the product with luminous display is applied to voltage of AC/DC:110-250V		
电流 current: 0.5-1mA		

JUT1-10RD/LA250	黑色 (BK)	3010101050
带发光显示适用于电压		
the product with luminous display is applied to voltage of AC/DC:110-250V		
电流 current: 0.5-1mA		

(1) 边插式联络件: 全绝缘 2 位;  
全绝缘 3 位; 全绝缘 10 位。  
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



JEB2-6	3010104008
JEB3-6	3010104009
JEB10-6	3010104010

JEB2-16	3010104014
JEB3-16	3010104015
JEB10-16	3010104001

(2) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。  
Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit



JFB2-16	3010103026
JFB3-16	3010103027
JFB10-16	3010103007

(3) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



ZB8	3010108004
-----	------------

ZB8	3010108004
-----	------------

# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)



本系列端子默认颜色: 灰色 (GY)  
支持客户定制颜色

### JUK1-1.5/GY

厚 / 宽 / 高	4.2/42.5/42/49.5		
Thickness/Width/Height	mm/mm/mm		
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)
Rigid cable	Soft cable	17.5	500
AWG:26-16	0.14-1.5	0.14-1.4	
IEC 60947-7-1			

### JUK1

#### 实用特征

端子具有通用安装脚能方便快速的安装在 U 型导轨 NS35 及 G 型导轨 NS32 上;

封闭型的螺钉引导孔即方便螺丝刀操作, 又可防止螺丝旋松后跌落机外;

电位分配可通过接入端子中央的中心联络件或插入锥形接线孔的边插联络件来实现;

对多个截面的端子配备了通用附件, 如: 端板、分组隔板、隔片等;

绝缘外壳采用机械强度高、电气特性好、弹性极佳的进口工程塑料—聚酰胺 (尼龙) 66;

顶部二端采用白色标记采列, 可实现统一标识。

#### Features:

Terminals with general-purpose mounting feet, which enables quick installation on U shaped track NS35 and G shaped track NS32;

Closed bolt leading hole will not only facilitate operation of screwdrivers, also prevent the bolt from dropping out;

Electric potential distribution is realized by either connecting central adaptor to the center of terminal or inserting a side adaptor to the cone jack;

General auxiliaries, such as end plate, segment spacer, and spacer, are attached for terminal with multiple sections;


The insulating shell is made of imported engineering plastic-polyamide(Nylon)66, which is of high mechanical intensity, good electric property, and super flexibility;

Two ends on the top with white marking system to realize uniformed sign.


#### 说明 Specification 简图 Schematic Drawing

端子带通用安装在 NS32 □ 型, 或 NS35 □ 型导轨上。  
Terminal: with general-purpose mounting feet, can be installed on tracks NS32 □ or NS35 □

(1) 端板 End plate




(2) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。  
Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit



(3) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。  
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



(4) 绝缘隔片: 用于相邻联络件的电气隔离; 可事后插入; 不占导轨任何空间。  
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.



(5) 分组隔片: 用于端子组间的视角及电气隔离。  
Segment spacer: for visual and electric separation between neighboring terminal groups.



(6) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



(7) 标记夹: 用来对端子排进行标示, 卡在终端固定件上, 高度可调, 书写面积: 44×7 (JUT1 系列通用)  
Mark clip: for identification of terminals insert to terminal fastener, with adjustable height and writing area of 44x7 mm<sup>2</sup> (general used for JUT1 series)



(8) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定件作用 (JUT1 系列作用)  
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT1 series)



型号 Model	订货号 Order Number
JUK1-1.5-GY	灰色 (GY) 30102030083
G-JUT1-1.5/2.5B	3010204002
JEB2-1.5	3010103033
JEB3-1.5	3010103034
JEB10-1.5	3010103001
JAP	3010107001
ZB4	3010108001
KLM-A	3010109001
E/1	3010110001



### JUK1-2.5B/GY

### JUK1-2.5/GY

### JUK1-4/GY

厚 / 宽 / 高 / 高	6.2/42.5/42/49.5			
Thickness/Width/Height/Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:24-12	0.2-4	0.2-2.5	32	690
IEC 60947-7-1				

厚 / 宽 / 高 / 高	5.2/42.5/47/54.5			
Thickness/Width/Height/Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:24-12	0.2-4	0.2-2.5	32	800
IEC 60947-7-1				

厚 / 宽 / 高 / 高	6.2/42.5/47/54.5			
Thickness/Width/Height/Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:24-10	0.2-6	0.2-4	41	800
IEC 60947-7-1				

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUK1-2.5B-GY	灰色 (GY) 3010203058 灰色 (GY)-M102 3010203081	JUK1-2.5-GY	灰色 (GY) 3010203049 灰色 (GY)-M101 3010203080	JUK1-4-GY	灰色 (GY) 3010203050 蓝色 (BE) 3010203126 灰色 (GY)-M101 3010203127
G-JUK1-1.5/2.5B	3010204002	G-JUK1-2.5/10	3010204006	G-JUK1-2.5/10	3010204006
JFB2-4	3010103016	JFB2-2.5	3010103013	JFB2-4	3010103016
JFB3-4	3010103017	JFB3-2.5	3010103014	JFB3-4	3010103017
JFB10-4	3010103002	JFB10-2.5	3010103003	JFB10-4	3010103002
JEB2-4	3010104005	JEB2-2.5	3010104002	JEB2-4	3010104005
JEB3-4	3010104006	JEB3-2.5	3010104003	JEB3-4	3010104006
JEB10-4	3010104007	JEB10-2.5	3010104004	JEB10-4	3010104007
JS-KK3	3010106001	JS-K	3010106002	JS-K	3010106002
JAP	3010107001	JAP	3010107001	JAP	3010107001
ZB6	3010108002	ZB5	3010108003	ZB6	3010108002
KLM-A	3010109001	KLM-A	3010109001	KLM-A	3010109001
E/1	3010110001	E/1	3010110001	E/1	3010110001

JUK1



# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)



本系列端子默认颜色: 灰色 (GY)  
支持客户定制颜色

### JUK1-6/GY

厚 / 宽 / 高	8.2/42.5/47/54.5		
Thickness/Width/Height	mm / mm / mm		
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I U
	Rigid cable	Soft cable	(A) (V)
AWG:24-8	0.2-10	0.2-6	57 800
IEC 60947-7-1			

### JUK1

#### 实用特征

端子具有通用安装脚能方便快速的安装在 U 型导轨 NS35 及 G 型导轨 NS32 上;

封闭型的螺钉引导孔即方便螺丝刀操作, 又可防止螺丝旋松后跌落机外;

电位分配可通过接入端子中央的中心联络件或插入锥形接线孔的边插联络件来实现;

对多个截面的端子配备了通用附件, 如: 端板、分组隔板、隔片等;

绝缘外壳采用机械强度高、电气特性好、弹性极佳的进口工程塑料—聚酰胺 (尼龙) 66;

顶部二端采用白色标记采列, 可实现统一标识。

#### Features:

Terminals with general-purpose mounting feet, which enables quick installation on U shaped track NS35 and G shaped track NS32;

Closed bolt leading hole will not only facilitate operation of screwdrivers, also prevent the bolt from dropping out;

Electric potential distribution is realized by either connecting central adaptor to the center of terminal or inserting a side adaptor to the cone jack;

General auxiliaries, such as end plate, segment spacer, and spacer, are attached for terminal with multiple sections;


The insulating shell is made of imported engineering plastic-polyamide(Nylon)66, which is of high mechanical intensity, good electric property, and super flexibility;

Two ends on the top with white marking system to realize uniformed sign.


#### 说明 Specification 简图 Schematic Drawing

端子带通用安装在 NS32 □ 型, 或 NS35 □ 型导轨上。  
Terminal: with general-purpose mounting feet, can be installed on tracks NS32 □ or NS35 □

(1) 端板 End plate




(2) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。  
Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit



(3) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。  
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



(4) 绝缘隔片: 用于相邻联络件的电气隔离; 可事后插入; 不占导轨任何空间。  
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.



(5) 分组隔片: 用于端子组间的视角及电气隔离。  
Segment spacer: for visual and electric separation between neighboring terminal groups.



(6) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



(7) 标记夹: 用来对端子排进行标示, 卡在终端固定件上, 高度可调, 书写面积: 44×7 (JUT1 系列通用)  
Mark clip: for identification of terminals insert to terminal fastener, with adjustable height and writing area of 44×7 mm<sup>2</sup> (general used for JUT1 series)



(8) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定件作用 (JUT1 系列作用)  
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT1 series)



型号 Model	订货号 Order Number
JUK1-6-GY	灰色 (GY) 蓝色 (BE)
	3010203095 3010203102
G-JUK1-2.5/10	3010204006
JFB2-6	3010103022
JFB3-6	3010103023
JFB10-6	3010103005
JEB2-6	3010104008
JEB3-6	3010104009
JEB10-6	3010104010
JS-K	3010106002
JAP	3010107001
ZB8	3010108004
KLM-A	3010109001
E/1	3010110001

# Industrial Distribution Terminal Blocks Screw type(Universal)

工业配电接线端子 - 螺钉类 (通用型)



**JUK1-10/GY**

**JUK1-16/GY**

**JUK1-16N-M2**

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	10.2/42.5/47/54.5		
刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) Rigid cable Soft cable	I	U	
AWG:20-6 IEC 60947-7-1	0.5-16 0.5-10	76	800

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	12.2/42.5/54/59		
刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) Rigid cable Soft cable	I	U	
AWG:12-4 IEC 60947-7-1	2.5-25 4-16	101	800

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	12.2/62.5/65/66.4		
刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) Rigid cable Soft cable	I	U	
AWG:10-6 IEC 60947-7-1	6-16 6-16	76	1000

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUK1-10-GY	灰色 (GY) 蓝色 (BE)	3010203067 3010203124	JUK1-16-GY	灰色 (GY)	3010203068
G-JUT1-2.5/10	3010204006	G-JUT1-16	3010102003	JUK1-16N-DK/GY-M2	灰色 (GY) 3010203114
JFB2-10	3010103024	JFB2-16	3010103026	JFB2-16	3010103026
JFB3-10	3010103025	JFB3-16	3010103027	JFB3-16	3010103027
JFB10-10	3010103006	JFB10-16	3010103007	JFB10-16	3010103007
JEB2-10	3010104011	JEB2-16	3010104014	JEB2-16	3010104014
JEB3-10	3010104012	JEB3-16	3010104015	JEB3-16	3010104015
JEB10-10	3010104013	JEB10-16	3010104001	JEB10-16	3010104001
JSK	3010106002	JSK	3010106002	JSK	3010106002
JAP	3010107001	JAP	3010107001	JAP	3010107001
ZB10	3010108005	ZB12	3010108128	ZB12	3010108128
KLM-A	3010109001	KLM-A	3010109001	KLM-A	3010109001
E/1	3010110001	E/1	3010110001	E/1	3010110001

JUK1

# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)



### JUK1-35/GY

厚 / 宽 / 高	15.2/50/62/69.5		
Thickness/Width/Height	15.2/50/62/69.5		
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U
Rigid cable	Soft cable	(A)	(V)
AWG:18-0	0.75-35	0.75-35	105 1000
IEC 60947-7-1			

JUK1

### 说明 Specification 简图 Schematic Drawing

### 型号 Model 订货号 Order Number

端子带通用安装在 NS32 型, 或 NS35 型导轨上。  
Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35.

JUK1-35-GY 灰色 (GY) 3010203069  
蓝色 (BE) 3010203125

(1) 端板 End plate



封闭型外壳, 不用端板。  
Sealed outer-case, don't need end plate.

(2) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。  
Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit




JFB2-35 3010103008  
JFB3-35 3010103009  
JFB10-35 3010103012

(3) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。  
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



JEB2-35 3010104016  
JEB3-35 3010104017  
JEB10-35 3010104018

(4) 绝缘隔片: 用于相邻联络件的电气隔离; 可事后插入; 不占导轨任何空间。  
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.



JSK 3010106002

(5) 分组隔片: 用于端子组间的视角及电气隔离。  
Segment spacer: for visual and electric separation between neighboring terminal groups.



(6) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



ZB16 3010108150

(7) 标记夹: 用来对端子排进行标示, 卡在终端固定件上, 高度可调, 书写面积: 44x7 (JUT1 系列通用)  
Mark clip: for identification of terminals insert to terminal fastener, with adjustable height and writing area of 44x7 mm<sup>2</sup> (general used for JUT1 series)



KLM-A 3010109001

(8) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定作用 (JUT1 系列作用)  
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT1 series)



E/1 3010110001

# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)



JUK1 双层接线端子：具有通用端子在相同的空间位置上两倍的接线容量，其上下两层在位置上错开了2.5 mm 的空间，不仅在视角上条理分明，同时在上层接线的情况下，螺丝刀能在下层区域内很方便的完成接线作业。

JUK1 double-layer wiring terminal: it owns twice wiring capacity of universal terminal at the same space position, its upper-lower two storey has 2.5 mm space staggered, therefore, not only is the visual angle clear, but also the screwdriver can simply finish wiring operation at lower space in case of being connected in upper levels.

### JUK1-2.5/2-GY

#### 双层接线端子 Double-layer type wiring terminal

厚 / 宽 / 高	5.2/56/62/69.5	
Thickness/Width/Height	5.2/56/62/69.5	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I U
Rigid cable	Soft cable	(A) (V)
AWG:24-12	0.2-4	0.2-2.5 32 500
IEC 60947-7-1		

### JUK1-4/2-GY

#### 双层接线端子 Double-layer type wiring terminal

厚 / 宽 / 高	5.2/56/62/69.5	
Thickness/Width/Height	5.2/56/62/69.5	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I U
Rigid cable	Soft cable	(A) (V)
AWG:24-12	0.2-4	0.2-4 32 500
IEC 60947-7-1		

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
端子带通用安装在 NS32 型, 或 NS35 型导轨上。 Terminal:with general-purpose mounting feet,can be installed on tracks NS32 or NS35		JUK1-2.5/2-GY	灰色 (GY) 3010203052	JUK-4/2-GY	灰色 (GY) 3010203056
(1) 端板 End plate		G-JUK1-2.5/4	3010204005	G-JUK1-2.5/4	3010204005
(2) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit		JFB2-2.5 JFB3-2.5 JFB10-2.5	3010103013 3010103014 3010103003	JFB2-4 JFB3-4 JFB10-4	3010103016 3010103017 3010103002
(3) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。 Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.		JEB2-2.5 JEB3-2.5 JEB10-2.5	3010104002 3010104003 3010104004	JEB2-4 JEB3-4 JEB10-4	3010104005 3010104006 3010104007
(4) 绝缘隔片: 用于相邻联络件的电气隔离; 可事后插入; 不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.		JS-KK3	3010106001	JS-KK3	3010106001
(5) 补偿端板: 与普通端子相邻排列时, 用来抵消层间错位, 厚 2.5mm。 Compensation header: when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm		DG-JUT1-2.5/4	3010102005	DG-JUT1-2.5/4	3010102005
(6) 补偿端板: 与普通端子相邻排列时, 用来抵消层间错位, 厚 2.5mm。 Compensation header: when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm		DP-JUT1-2.5/4	3010102006	DP-JUT1-2.5/4	3010102006
(7) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		ZB5	3010108003	ZB6	3010108002

JUK1

# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)



JUK1 双层接线端子: 具有通用端子在相同的空间位置上两倍的接线容量, 其上下两层在位置上错开了 2.5 mm 的空间, 不仅在视觉上条理分明, 同时在上层接线的情况下, 螺丝刀能在下层区域内很方便的完成接线作业。

JUK1 double-layer wiring terminal: it owns twice wiring capacity of universal terminal at the same space position, its upper-lower two storey has 2.5 mm space staggered, therefore, not only is the visual angle clear, but also the screwdriver can simply finish wiring operation at lower space in case of being connected in upper levels.

### JUK1-2.5/2L/GY

#### 双层接线端子 Double-layer type wiring terminal

厚 / 宽 / 高 / 高	5.2/56/62/69.5			
Thickness/Width/Height/ Height				
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)
	Rigid cable	Soft cable		
AWG:24-12	0.2-4	0.2-2.5	32	500
IEC 60947-7-1				

### JUK1-2.5/2Q/GY

#### 双层接线端子 Double-layer type wiring terminal

厚 / 宽 / 高 / 高	5.2/67/62/69.5			
Thickness/Width/Height/ Height				
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)
	Rigid cable	Soft cable		
AWG:24-12	0.2-4	0.2-2.5	32	500
IEC 60947-7-1				

## JUK1

### 说明 Specification 简图 Schematic Drawing

端子带通用安装在 NS32 型, 或 NS35 型导轨上。  
Terminal: with general-purpose mounting feet, can be installed on tracks NS32 or NS35

### 型号 Model 订货号 Order Number

JUK1-2.5/2L-GY 灰色 (GY) 3010203061

### 型号 Model 订货号 Order Number

JUK1-2.5/2Q-GY 灰色 (GY) 3010203057


(1) 端板 End plate



G-JUK1-2.5/4 3010204005

G-JUT1-2.5/4Q 3010102007

(2) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。  
Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit



JFB2-2.5 3010103013  
JFB3-2.5 3010103014  
JFB10-2.5 3010103003

JFBN2-2.5 3010103062  
JFBN3-2.5 3010103067  
JFBN10-2.5 3010103004

(3) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。  
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



JEB2-2.5 3010104002  
JEB3-2.5 3010104003  
JEB10-2.5 3010104004

JEB2-2.5 3010104002  
JEB3-2.5 3010104003  
JEB10-2.5 3010104004

(4) 绝缘隔片: 用于相邻联络件的电气隔离; 可事后插入; 不占导轨任何空间。  
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.



JS-KK3 3010106001

JS-KK3 3010106001

(5) 补偿端板: 与普通端子相邻排列时, 用来抵消层间错位, 厚 2.5mm。  
Compensation header: when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm



DG-JUT1-2.5/4 3010102005

(6) 补偿端板: 与普通端子相邻排列时, 用来抵消层间错位, 厚 2.5mm。  
Compensation header: when laid adjacently to common terminal, it can offset error between layers, with thickness of 2.5mm



DP-JUT1-2.5/4 3010102006

DP-JUT1-2.5/4Q 3010102009

(7) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



ZB5 3010108003

ZB5 3010108003

# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)

本系列端子默认颜色: 黑色 (BK)  
支持客户定制颜色。

JUK-4RD 保险丝形接线端子: 采用分断悬壁来接入 G 型保险丝, 操作十分方便, 外壳采用全封闭, 安全可靠, 带发光显示的端子会给出保险丝的通断信号。该类端子的电流由安装的保险丝决定, 电压由选择的发光显示决定。

JUK-4RD Fuse-type wiring terminal series: adopting broken bracket to connect into G type fuse without any difficulty, and the outer-case adopts whole-seal structure with security and reliability properties, the luminous terminal would give on-off signal of fuse. The current of this type terminal is determined by installed fuse, and the voltage is determined by selected luminous display.



### JUK1-4RD/BK

#### 保险丝型接线端子 Fuses-type wiring terminal

厚 / 宽 / 高	8.2/72.5/56.5/64		
Thickness/Width/Height	Height		
适用于 G 型保险丝规格	G type fuse specification 5×25		
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	U	
Rigid cable	Soft cable	(V)	
AWG:24-12	0.2-4	0.2-4	AC 800
IEC 60947-7-1			

型号 Model	订货号 Order Number
----------	------------------

端子带通用安装在 NS32 型, 或 NS35 型导轨上。  
Terminal with general-purpose mounting feet, can be installed on tracks NS32 or NS35

型号 Model	订货号 Order Number
----------	------------------

JUK1-4RD/BK	黑色 (BK)	3010203065
	灰色 (GY)	3010203070

JUK1-4RD/LED24	黑色 (BK)	3010203062
带发光显示适用于电压 the product with luminous display is applied to voltage of AC/DC:15-30V 电流 current: 3.5-8.1mA		

JUK1-4RD/LA250	灰色 (GY)	3010203063
带发光显示适用于电压 the product with luminous display is applied to voltage of AC/DC:110-250V 电流 current: 0.5-1mA		

(1) 边插式联络件: 全绝缘 2 位;  
全绝缘 3 位; 全绝缘 10 位。  
Side adaptor: Full insulation in  
2 digit. Full insulation in 3 digit.  
Full insulation in 10 digit.



JEB2-6	3010104008
JEB3-6	3010104009
JEB10-6	3010104010

(2) 中心联络件: 用于端子中央, 四线横向  
向桥接, 可分 2-位, 3-位, 5-位, 10-位。  
Central adaptor: used at the center  
of terminal for transverse bridge  
connection, which is divided into: 2-  
digit, 3-digit, 5-digit, and 10-digit



(3) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



ZB8	3010108004
-----	------------

JUK1

# Industrial Distribution Terminal Blocks Screw type(Universal)

## 工业配电接线端子 - 螺钉类 (通用型)



本系列端子默认颜色: 灰色 (GY)  
支持客户定制颜色

### JUK1-6S/GY

厚 / 宽 / 高	8.2/72/51.5/59		
Thickness/Width/Height	8.2/72/51.5/59		
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I U
	Rigid cable	Soft cable	(A) (V)
AWG:20-8	0.5-10	0.5-6	57 400
IEC 60947-7-1			

### JUK1

#### 实用特征

端子具有通用安装脚能方便快速的安装在 U 型导轨 NS35 及 G 型导轨 NS32 上;

封闭型的螺钉引导孔即方便螺丝刀操作, 又可防止螺丝旋松后跌落机外;

电位分配可通过接入端子中央的中心联络件或插入锥形接线孔的边插联络件来实现;

对多个截面的端子配备了通用附件, 如: 端板、分组隔板、隔片等;

绝缘外壳采用机械强度高、电气特性好、弹性极佳的进口工程塑料—聚酰胺 (尼龙) 66;

顶部二端采用白色标记采列, 可实现统一标识。

#### Features:

Terminals with general-purpose mounting feet, which enables quick installation on U shaped track NS35 and G shaped track NS32;

Closed bolt leading hole will not only facilitate operation of screwdrivers, also prevent the bolt from dropping out;

Electric potential distribution is realized by either connecting central adaptor to the center of terminal or inserting a side adaptor to the cone jack;

General auxiliaries, such as end plate, segment spacer, and spacer, are attached for terminal with multiple sections;

The insulating shell is made of imported engineering plastic-polyamide(Nylon)66, which is of high mechanical intensity, good electric property, and super flexibility;

Two ends on the top with white marking system to realize uniformed sign.


#### 说明 Specification 简图 Schematic Drawing

端子带通用安装在 NS32 □ 型, 或 NS35 □ 型导轨上。  
Terminal: with general-purpose mounting feet, can be installed on tracks NS32 □ or NS35 □

(1) 端板 End plate




(2) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。  
Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit



(3) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。  
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



(4) 绝缘隔片: 用于相邻联络件的电气隔离; 可事后插入; 不占导轨任何空间。  
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.



(5) 分组隔片: 用于端子组间的视角及电气隔离。  
Segment spacer: for visual and electric separation between neighboring terminal groups.



(6) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



(7) 标记夹: 用来对端子排进行标示, 卡在终端固定件上, 高度可调, 书写面积: 44×7 (JUT1 系列通用)  
Mark clip: for identification of terminals insert to terminal fastener, with adjustable height and writing area of 44x7 mm<sup>2</sup> (general used for JUT1 series)



(8) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定件作用 (JUT1 系列作用)  
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT1 series)



#### 型号 Model 订货号 Order Number

JUK1-6S-GY 灰色 (GY) -M102 3010203082  
红色 (RD) 3010203090

G-JUT1-6S 3010204003

JFB10-6S/S(短) 3010103048  
JFB10-6S/L(长) 3010103049

JEB2-6 3010104008  
JEB3-6 3010104009  
JEB10-6 3010104010

JAP/6S 3010107004

ZB8 3010108004

# Screw Type Ground terminal(Universal)

## 螺钉类接地端子（通用型）



本系列端子默认颜色：黄绿两色（PE）

### JUK1-1.5PE

厚 / 宽 / 高	4.2/42.5/42/49.5	
Thickness/Width/Height	mm/mm/mm	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	
Rigid cable	Soft cable	
AWG:26-16	0.14-1.5	0.14-1.5
IEC 60947-7-2		

JUK 通用型接地端子系列产品主要用于接地功能，或接零功能，具有相应规格接线端子的电流承载能力。其低接触电阻，防腐蚀连接点，黄绿标志均能满足有关技术标准的规定。

JUK universal landing terminal series product is mainly for landing or connecting to neutral, it possesses current load capability of corresponding specification wiring terminal. Its low-connection resistance, anti-corrosion connection point and yellow/green mark all can meet the regulated demand of relative technical standard.

### 说明 Specification 简图 Schematic Drawing

接地端子：带黄绿色绝缘外壳，可安装在 NS32 型或 NS35 型导轨上。  
Landing terminal: with yellow/green insulation outer-case, it can be installed in the NS32 type or NS35 type track.

(1) 边插式联物件：全绝缘 2 位；全绝缘 3 位；全绝缘 10 位。  
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



(2) 标记条：有横向和竖向两种字体，10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



### 型号 Model 订货号 Order Number

JUK1-1.5PE 黄 + 绿 (PE) 3010203025

ZB4 3010108001

JUK1



### JUK1-2.5B/PE

厚 / 宽 / 高	6.2/42.5/42/49.5	
Thickness/Width/Height	mm/mm/mm	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	
Rigid cable	Soft cable	
AWG:24-12	0.2-4	0.2-2.5
IEC 60947-7-2		



### JUK1-2.5PE

厚 / 宽 / 高	6.2/42.5/42/49.5	
Thickness/Width/Height	mm/mm/mm	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	
Rigid cable	Soft cable	
AWG:24-12	0.2-4	0.2-2.5
IEC 60947-7-2		



### JUK1-4PE

厚 / 宽 / 高	6.2/42.5/47/54.5	
Thickness/Width/Height	mm/mm/mm	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	
Rigid cable	Soft cable	
AWG:24-10	0.2-6	0.2-4
IEC 60947-7-2		

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUK1-2.5B/PE	黄 + 绿 (PE) 3010203026	JUK1-2.5PE	黄 + 绿 (PE) 3010203027	JUK1-4PE	黄 + 绿 (PE) 3010203028
JEB2-4	3010104005	JEB2-2.5	3010104002	JEB2-4	3010104005
JEB3-4	3010104006	JEB3-2.5	3010104003	JEB3-4	3010104006
JEB10-4	3010104007	JEB10-2.5	3010104004	JEB10-4	3010104007
ZB6	3010108002	ZB5	3010108003	ZB6	3010108002



# Screw Type Ground terminal(Universal)

## 螺钉类接地端子 (通用型)



**JUK1-6PE**

**JUK1-10PE**

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height  
8.2/42.5/47/54.5  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
AWG:24-8 0.2-10 0.2-6  
IEC 60947-7-2

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height  
10.2/42.5/47/54.5  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
AWG:20-6 0.5-16 0.5-10  
IEC 60947-7-2

JUK1

**说明 Specification 简图 Schematic Drawing**

接地端子: 带黄绿色绝缘外壳, 可安装在 NS32 型, 或 NS35 型导轨上。  
Landing terminal: with yellow/green insulation outer-case, it can be installed in the NS32 type or NS35 type track.

(1) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位。  
Side adaptor: Full insulation in 2 digit. Full insulation in 3 digit. Full insulation in 10 digit.



**型号 Model 订货号 Order Number**

JUK1-6PE	黄 + 绿 (PE)	3010203029
JEB2-6		3010104008
JEB3-6		3010104009
JEB10-6		3010104010

**型号 Model 订货号 Order Number**

JUK1-10PE	黄 + 绿 (PE)	3010203030
JEB2-10		3010104011
JEB3-10		3010104012
JEB10-10		3010104013

(2) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



ZB8		3010108004
-----	--	------------

ZB10		3010108005
------	--	------------



**JUK1-16PE**

**JUK1-35PE**

**JUK1-50PE**

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height  
12.2/42.5/54/61.5  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
AWG:12-4 2.5-25 4-16  
IEC 60947-7-2

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height  
15.2/50/62/69.5  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
AWG:18-0 0.75-50 0.75-35  
IEC 60947-7-2

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height  
20.2/71.3/77.4/84.9  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
AWG:6-0 16-50 25-50  
IEC 60947-7-2

**型号 Model 订货号 Order Number**

JUK1-16PE	黄 + 绿 (PE)	3010203031
JEB2-16		3010104014
JEB3-16		3010104015
JEB10-16		3010104001

**型号 Model 订货号 Order Number**

JUK1-35PE	黄 + 绿 (PE)	3010203032
JEB2-35		3010104016
JEB3-35		3010104017
JEB10-35		3010104018

**型号 Model 订货号 Order Number**

JUK1-50PE	黄 + 绿 (PE)	3010203033
-----------	------------	------------

ZB12		3010108128
------	--	------------

ZB16		3010108150
------	--	------------

ZB16		3010108150
------	--	------------

# Industrial Distribution Terminal Blocks Screw type(Combination type)

## 工业配电接线端子 - 螺钉类 (组合型)



本系列端子默认颜色: 米黄色 (CM)  
支持客户定制颜色

JUT2-2.5/CM		JUT2-4/CM	
厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	6.2/41.5/42.5/50	厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	6.5/42/47.5/55
额定截面积 Rated section:2.5mm <sup>2</sup>	I U (A) (V) 24 800	额定截面积 Rated section:4mm <sup>2</sup>	I U (A) (V) 32 800
AWG:24-12 IEC 60947-7-1		AWG:24-14 IEC 60947-7-1	

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
端子带通用安装在 NS32 型, 或 NS35 型导轨上。 Terminal:with general-purpose mounting feet,can be installed on tracks NS32 or NS35		JUT2-2.5	米黄色 (CM) 3010301001 蓝色 (BE) 3010301025 灰色 (GY) 3010301042 米黄色 (CM)-M101 3010301093	JUT2-4	米黄色 (CM) 3010301002 蓝色 (BE) 3010301026
(1) 端板 End plate		G-JUT2-2.5	3010302001	G-JUT2-4/10	3010302002
(2) 分组隔板: 用于端子组间的视角及电气隔离。 Insulating spacer: for visual and electric separation between neighboring terminal groups.		TW2.5	3010305001	TW4/10	3010305002
(3) 绝缘隔片: 用于相邻联接件的电气隔离; 可事后插入; 不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.		ST2.5/35	3010306001	ST2.5/35	3010306001
(4) 中心联接件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into:2-digit,3-digit,5-digit,and 10-digit		JQ2-2.5 JQ3-2.5 JQ10-2.5	3010303001 3010303002 3010303003	JQ2-4 JQ3-4 JQ10-4	3010303004 3010303005 3010303006
(5) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		DEK5	3010307001	DEK5	3010307001
(6) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定作用 (JUT2 系列作用) Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination(universal for JUT2 series)		E/2	3010308002	E/2	3010308002
(7) 安装导轨 (NS35/7.5) Installment track(NS35/7.5)		NS35/7.5	3010113001	NS35/7.5	3010113001
(8) 终端固定件 Terminal fixed component		E/4	3010603001	E/4	3010603001
(9) 安装轨 (NS35/7.5) Installment track(NS35/7.5)		NS32/15	3010113010	NS32/15	3010113010

JUT2

# Industrial Distribution Terminal Blocks Screw type(Combination type)

## 工业配电接线端子 - 螺钉类 (组合型)



### JUT2-4K/CM 开关型接线端子 Switch type terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	6.5/46/38/45.5
额定截面积 Rated section:4mm <sup>2</sup>	I U (A) (V)
AWG:24-10	10 250
IEC 60947-7-1	

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number
---------------------------------------	----------	------------------

端子带通用安装在 NS32 型, 或 NS35 型导轨上。  
Terminal:with general-purpose mounting feet,can be installed on tracks NS32 or NS35

JUT2-4K	米黄色 (CM)	3010301012
---------	----------	------------

JUT2

(1) 端板 End plate



G-JUT2-4K	3010302010
-----------	------------

(2) 分组隔板: 用于端子组间的视角及电气隔离。  
Insulating spacer: for visual and electric separation between neighboring terminal groups.



TW-4K	
-------	--

(3) 绝缘隔片: 用于相邻联格件的电气隔离; 可事后插入; 不占导轨任何空间。  
Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.



(4) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。  
Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into:2-digit,3-digit,5-digit,and 10-digit



(5) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



DEK5	3010307001
------	------------

(6) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定件作用 (JUT2 系列作用)  
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination(universal for JUT2 series)



E/2	3010308002
-----	------------

(7) 安装导轨 (NS35/7.5)  
Installment track(NS35/7.5)



NS35/7.5	3010113001
----------	------------

(8) 终端固定件  
Terminal fixed component



E/4	3010603001
-----	------------

(9) 安装轨 (NS35/7.5)  
Installment track(NS35/7.5)



NS32/15	3010113010
---------	------------

# Industrial Distribution Terminal Blocks Screw type(Combination type)

## 工业配电接线端子 - 螺钉类 (组合型)



**JUT2-6/CM**










**JUT2-6S1/CM**  
试验型接线端子 Test type terminal

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height  
额定截面积 Rated section:6mm<sup>2</sup>  
AWG:24-10  
IEC 60947-7-1

8/42/47.5/55  
I U  
(A) (V)  
41 800

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height  
额定截面积 Rated section:6mm<sup>2</sup>  
AWG:24-8  
IEC 60947-7-1

8/65/48.2/55.7

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
<p>端子带通用安装在 NS32 型, 或 NS35 型导轨上。 Terminal:with general-purpose mounting feet,can be installed on tracks NS32 or NS35</p>	JUT2-6	米黄色 (CM) 蓝色 (BE) 灰色 (GY) 3010301003 3010301029 3010301031	JUT2-6S1	米黄色 (CM) 3010301011
<p>(1) 端板 End plate</p> 	G-JUT2-4/10	3010302002	G-JUT2-6S1	3010302009
<p>(2) 分组隔板: 用于端子组间的视角及电气隔离。 Insulating spacer: for visual and electric separation between neigh-boring terminal groups.</p> 	TW4/10	3010305002	TW-6S1	
<p>(3) 绝缘隔片: 用于相邻联络件的电气隔离; 可事后插入; 不占导轨任何空间。 Insulating spacer: for electric separation of two neighboring adaptors; they may be inserted afterwards, and not occupy any space of track.</p> 	ST2.5/35	3010306001	ST-6S1	
<p>(4) 边插式联络件: 全绝缘 2 位; 全绝缘 3 位; 全绝缘 10 位 Side adaptor: Full insulation in 2digit;Full insulation in 3digit;Full insulation in 10 digit</p> 	JQ2-6 JQ3-6 JQ10-6	3010303007 3010303008 3010303009	JQ2-6 JQ3-6 JQ10-6	3010104008 3010104009 3010104010
<p>(5) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.</p> 	DEK5	3010307001	DEK5	3010307001
<p>(6) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定件作用 (JUT2 系列作用) Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination(universal for JUT2 series)</p> 	E/2	3010308002	E2	3010308002
<p>(7) 安装导轨 (NS35/7.5) Installment track(NS35/7.5)</p> 	NS35/7.5	3010113001	NS35/7.5	3010113001
<p>(8) 终端固定件 Terminal fixed component</p> 	E/4	3010603001	E/4	3010603001
<p>(9) 安装轨 (NS35/7.5) Installment track(NS35/7.5)</p> 	NS32/15	3010113010	NS32/15	3010113010

JUT2

# Industrial Distribution Terminal Blocks Screw type(Combination type)

工业配电接线端子 - 螺钉类 (组合型)



**JUT2-10/CM**

**JUT2-16/CM**

**JUT2-35/CM**

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	10/42/47.5/55	厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	12/50/53.5/61	厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	18/58/63.5/71
额定截面积 Rated section:10mm <sup>2</sup>	I U (A) (V) 57 800	额定截面积 Rated section:16mm <sup>2</sup>	I U (A) (V) 76 800	额定截面积 Rated section:4mm <sup>2</sup>	I U (A) (V) 125 800
AWG:20-6		AWG:12-4		AWG:18-0	
IEC 60947-7-1		IEC 60947-7-1		IEC 60947-7-1	

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
------------------	----------------------	----------	------------------	----------	------------------

JUT2-10	米黄色 (CM) 蓝色 (BE) 灰色 (GY)	3010301004 3010301033 3010301034	JUT2-16	米黄色 (CM) 灰色 (GY) 蓝色 (BE)	3010301005 3010301028 3010301035	JUT2-35	米黄色 (CM) 蓝色 (BE) 灰色 (GY)	3010301006 3010301032 3010301036
---------	--------------------------------	--	---------	--------------------------------	--	---------	--------------------------------	--

G-JUT2-4/10	3010302002	G-JUT2-16	3010302003	G-JUT2-35	3010302004
-------------	------------	-----------	------------	-----------	------------

TW4/10	3010305002	TW16		TW-35	
--------	------------	------	--	-------	--

ST2.5/35	3010306001	ST2.5/35	3010306001	ST2.5/35	3010306001
----------	------------	----------	------------	----------	------------

JQ2-10	3010303010	JQ2-16	3010303013	JQ2-35	3010303016
JQ3-10	3010303011	JQ3-16	3010303014	JQ3-35	3010303017
JQ10-10	3010303012	JQ10-16	3010303015		3010303030

DEK5	3010307001	DEK5	3010307001	DEK5	3010307001
------	------------	------	------------	------	------------

E/2	3010308002	E/2	3010308002	E/2	3010308002
-----	------------	-----	------------	-----	------------

NS35/7.5	3010113001	NS35/7.5	3010113001	NS35/7.5	3010113001
----------	------------	----------	------------	----------	------------

E/4	3010603001	E/4	3010603001	E/4	3010603001
-----	------------	-----	------------	-----	------------

NS32/15	3010113010	NS32/15	3010113010	NS32/15	3010113010
---------	------------	---------	------------	---------	------------

JUT2

# Industrial Distribution Terminal Blocks Screw type(Combination type)

## 工业配电接线端子 - 螺钉类 (组合型)



### JUT2-70/CM

### JUT2-4/2/CM 双层接线端子 Double-layer wiring terminal

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height  
额定截面积 Rated section:70mm<sup>2</sup>  
AWG:2-0  
IEC 60947-7-1

22/75/80/87.5  
I U  
(A) (V)  
192 800

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height  
额定截面积 Rated section:4mm<sup>2</sup>  
AWG:24-10  
IEC 60947-7-1

6.2/54/60/67.5  
I U  
(A) (V)  
32 500

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
端子带通用安装在 NS32 型, 或 NS35 型导轨上。 Terminal:with general-purpose mounting feet,can be installed on tracks NS32 or NS35		JUT2-70	米黄色 (CM) 3010301007	JUT2-4/2	米黄色 (CM) 灰色 (GY) 3010301008 3010301072
(1) 端板 End plate		G-JUT2-70	3010302005	G-JUT2-4/2	3010302006
(2) 分组隔板: 用于端子组间的视角及电气隔离。 Insulating spacer: for visual and electric separation between neighboring terminal groups.					
(3) 中心联络件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。 Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into:2-digit,3-digit,5-digit,and 10-digit				JQ2-4/2 JQ3-4/2 JQ10-4/2	3010303018 3010303019 3010303020
(4) 标记条: 有横向和竖向两种字体, 10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		DEK5	3010307001	DEK5	3010307001
(5) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定件作用 (JUT2 系列作用) Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination(universal for JUT2 series)		E/2	3010308002	E/2	3010308002
(6) 安装导轨 (NS35/7.5) Installment track(NS35/7.5)		NS35/7.5	3010113001	NS35/7.5	3010113001
(7) 终端固定件 Terminal fixed component		E/4	3010603001	E/4	3010603001
(8) 安装轨 (NS35/7.5) Installment track(NS35/7.5)		NS32/15	3010113010	NS32/15	3010113010

JUT2

# Industrial Distribution Terminal Blocks Screw type(Combination type)

## 工业配电接线端子 - 螺钉类 (组合型)



### JUT2-4/2L/CM

双层互连接线端子 Double-layer interconnection terminal

### JUT2-2.5E/CM

小型接线端子 Miniature wiring terminal series

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 6.2/54/60/67.5  
额定截面面积 Rated section:4mm<sup>2</sup>  
AWG:24-10  
IEC 60947-7-1

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 5/22.5/25  
额定截面面积 Rated section:2.5mm<sup>2</sup>  
AWG:24-12  
IEC 60947-7-1

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
---------------------------------------	----------	------------------	----------	------------------

端子带通用安装在 NS32 型, 或 NS35 型导轨上。  
Terminal:with general-purpose mounting feet,can be installed on tracks NS32 or NS35

JUT2-4/2L 米黄色 (CM) 3010301009

JUT2-2.5E 米黄色 (CM) 3010301013

(1) 端板 End plate



G-JUT2-4/2 3010302006

G-JUT2-2.5E 3010302014

(2) 分组隔板: 用于端子组间的视角及电气隔离。  
Insulating spacer: for visual and electric separation between neighboring terminal groups.



(3) 中心联接件: 用于端子中央, 四线横向桥接, 可分 2-位, 3-位, 5-位, 10-位。  
Central adaptor: used at the center of terminal for transverse bridge connection, which is divided into: 2-digit, 3-digit, 5-digit, and 10-digit



JQ2-4/2 3010303018  
JQ3-4/2 3010303019  
JQ10-4/2 3010303020

说明: 该端子由端子和固定件两部分组成, 结构紧凑, 无须安装轨, 螺栓穿过固定件可直接安装在电气柜的壁上, 而且固定件位置可根据需要放在前后任意位置, 所占空间小, 标记清晰。

Instruction: this terminal is composed of terminal and fixed component, with compact structure and without installment track, the screw bolt could be directly installed onto electrical cupboard's wall through fixed component, moreover, the position of fixed component can be laid anywhere according to demand, and it takes up small space and the mark is clear.

(4) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.




DEK5 3010307001

(5) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定件作用 (JUT2 系列作用)  
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination (universal for JUT2 series)



E/2 3010308002

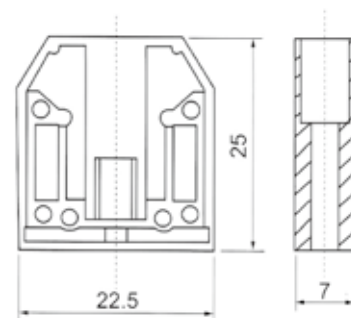

(6) 安装导轨 (NS35/7.5)  
Installment track (NS35/7.5)



NS35/7.5 3010113001

(7) 终端固定件  
Terminal fixed component



E/4 3010603001

(8) 安装轨 (NS35/7.5)  
Installment track (NS35/7.5)



NS32/15 3010113010

G-JUT2-2.5E 固定件型号  
fixed component type 5 103 224 订货号  
order number

# Scerw type Ground terminal(Combination type)

## 螺钉类 - 接地端子（组合型）



本系列端子默认颜色：黄绿两色（PE）

### JUT2-2.5PE

厚 / 宽 / 高 \ 高  
Thickness/Width/Height/ \ Height 6.2/39.1/42.5/50  
额定截面积 Rated section:2.5mm<sup>2</sup>  
AWG:24-12  
IEC 60947-7-2

JUT2 接地型接线端子系列产品主要用于接地功能，或接零功能，具有相应规格接线端子的电流承载能力。  
JUT2 landing-type wiring terminal series product is mainly used for landing or connecting to neutral, it has the same current load capability of the same specification wiring terminal.

#### 说明 Specification 简图 Schematic Drawing

接地端子：可安装在 NS35 \ 型导轨上。  
Terminal: can be installed on tracks NS35 \ type.

(1) 标记条：有横向和竖向两种字体，10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



#### 型号 Model 订货号 Order Number

JUT1-2.5PE 黄 + 绿 (PE) 3010301014

DEK5 3010307001

JUT2



### JUT2-4PE

厚 / 宽 / 高 \ 高  
Thickness/Width/Height/ \ Height 6.8/40.3/47.2/55.2  
额定截面积 Rated section:4mm<sup>2</sup>  
AWG:24-8  
IEC 60947-7-2

### JUT2-6PE

厚 / 宽 / 高 \ 高  
Thickness/Width/Height/ \ Height 8/40.7/47.7/55.2  
额定截面积 Rated section:6mm<sup>2</sup>  
AWG:24-8  
IEC 60947-7-2

### JUT2-10PE

厚 / 宽 / 高 \ 高  
Thickness/Width/Height/ \ Height 10/40.3/47.7/55.2  
额定截面积 Rated section:10mm<sup>2</sup>  
AWG:20-6  
IEC 60947-7-2

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUT2-4PE	黄 + 绿 (PE) 3010301015	JUT2-6PE	黄 + 绿 (PE) 3010301016	JUT2-10PE	黄 + 绿 (PE) 3010301017
DEK5	3010307001	DEK5	3010307001	DEK5	3010307001



# Scerw type Ground terminal(Combination type)

螺钉类 - 接地端子 (组合型)



JUT2-16PE				JUT2-35PE				JUT2-70PE			
厚 / 宽 / 高 \ 高 Thickness/Width/Height/ \ Height		12.2/50.3/54.6/61.5		厚 / 宽 / 高 \ 高 Thickness/Width/Height/ \ Height		18/58/63.5/71		厚 / 宽 / 高 \ 高 Thickness/Width/Height/ \ Height		22/75.5/80/87.5	
额定截面积 Rated section:16mm <sup>2</sup>				额定截面积 Rated section:35mm <sup>2</sup>				额定截面积 Rated section:70mm <sup>2</sup>			
AWG:12-4 IEC 60947-7-2				AWG:18-0 IEC 60947-7-2				AWG:20-0 IEC 60947-7-2			
型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUT2-16PE	黄 + 绿 (PE) 3010301018	JUT2-35PE	黄 + 绿 (PE) 3010301019	JUT2-70PE	黄 + 绿 (PE) 3010301039	DEK5	3010307001	DEK5	3010307001	DEK5	3010307001

JUT2



JUT2 接线端子系列采用框式接线系统,该系统由压线框、螺钉、导电片组成。压线框是用淬火硬化并经镀锌纯化的优质钢板制成,能和谐的配合钢制螺钉将导线牢固的压紧。在拧紧螺钉的过程中,压线框上部带螺纹的舌片上弹起,产生一个对螺钉的反作用,实现自锁功能。通电后由于温升造成的导线直径的改变则由压线框本身的弹性来抵消,因此无需再次拧紧螺钉。

JUT2 wiring terminal series adopts frame-type wiringsystem,which is composed of wire-pressing frame,screw and electrical conduction slice,of which the wire-pressing frame made of super-quality steel through quenching hardening and galvanization deactivation,so it could be cooperated harmoniously with steel screw to press lead tightly. In the process of tightening screw,the tongue piece with screw line on top of wire-pressing frame would bounce upwards and produce reaction force on screw to realize self-lock function.After being electrified,the lead diameter's change resulting from temperature rising would be offset by wire-pressing frame's elasticity,which doesn't need to tighten screw again.

# Industrial Distribution Terminal Blocks

## Fuse type terminal series

### 工业配电接线端子 - 保险丝型端子系列



#### 保险丝型接线端子

保险丝型接线端子的电流由所安装的保险丝决定，电压由所选择的发光显示器决定。带发光显示的型号全在保险丝熔断时发出显示信号。

#### Fuse-type wiring terminal

The current of fuse terminal is determined by selected luminous displayer. The type with luminous indication would have indication signal when the fuse is broken down.

#### JUT2-4RD/CM 悬臂分断式保险丝型接线端子 Bracket broken fuse type of wiring terminal


厚 / 宽 / 高 / 高	8/58/44/51.5
Thickness/Width/Height/ Height	
适用于 G 型保险丝规格 G type fuse specification	5×25
额定截面积 Rated section:70mm <sup>2</sup>	U (V)
AWG:24-10	AC 500
IEC 60947-7-1	

#### 说明 Specification 简图 Schematic Drawing

端子带通用安装在 NS32 型，或 NS35 型导轨上。  
Terminal:with general-purpose mounting feet,can be installed on tracks NS32 or NS35

型号 Model	订货号 Order Number
JUT2-4RD	米黄色 (CM) 3010301010 灰色 (GY) 3010301040
JUT2-4RD/LED24	深灰色 (DK/GY) 3010301083 米黄色 (CM)-M101 3010301077
电压 /Voltage AV/DC:15-30V	
电流 Current:3.5-8.1mA	米黄色 (CM) 3010301022
JUT2-4RD/LA250	米黄色 (CM) 3010301023 灰色 (GY) 3010301030
电压 /Voltage AV/DC:110-250V	
电流 Current:0.5-1mA	

(1) 端板 End plate



G-JUT2-4RD 3010302007

(2) 边插式联络件:全绝缘 2 位;全绝缘 3 位;全绝缘 10 位

Side adaptor: Full insulation in 2digit;Full insulation in 3digit;Full insulation in 10 digit



(4) 标记条:有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



DEK5 3010307001

(5) 终端固定件: 标记夹和标记条可卡在它上进行标识。另对端子排终端起固定件作用 (JUT2 系列)  
Terminal fixed component: mark clamp and mark strip could be blocked onto it to mark it, additionally, it could be used as fixed component to terminal row's termination(universal for JUT2 series)



E/2 3010308002

(6) 安装导轨 (NS35/7.5)  
Installment track(NS35/7.5)



NS35/7.5 3010113001

(7) 终端固定件  
Terminal fixed component



E/4 3010603001

(8) 安装轨 (NS35/7.5)  
Installment track(NS35/7.5)



NS32/15 3010113010

JUT2

# INDUSTRIAL DISTRIBUTION TERMINAL BLOCKS


## 工业配电接线端子


### 弹簧类

端子一般主要有外壳，笼式弹簧和导电片 3 大部分组成，接线时，通过螺丝刀按压笼式弹簧，使弹簧接线口张开，插入导线松开螺丝刀即可。接线方便快捷，省时省力，免维护；具有优异的抗振动能力；同时最大化的接线空间，有效地节约了空间：左右中三侧均可放置标记条，标识清晰醒目，插拔式的桥接件装卸方便快捷，可轻松实现跨接，有效的节约了产品安装的时间。

### Spring model

This model terminal block mainly consists 3 parts including shell,cage-style spring and conducting strip.During the line connecting,the screwdriver will be used for pressing the cage-style spring so that the spring connecting portion will open,insert the wire.loose the screw driver,and then the whole processes are completed.This line connecting is quick,easy,time and efforts saving,and free of maintenance;it has agood anti-vibration property; meanwhile,its largest line-connecting space effectively saves the space; the tag can be put at the left side,right side or middle area,and the mark is noticeable and striking.Theplug-in style bridge part is easily assembled and dissembled, the connecting can be easily done,and the installation time can be effectively saved.

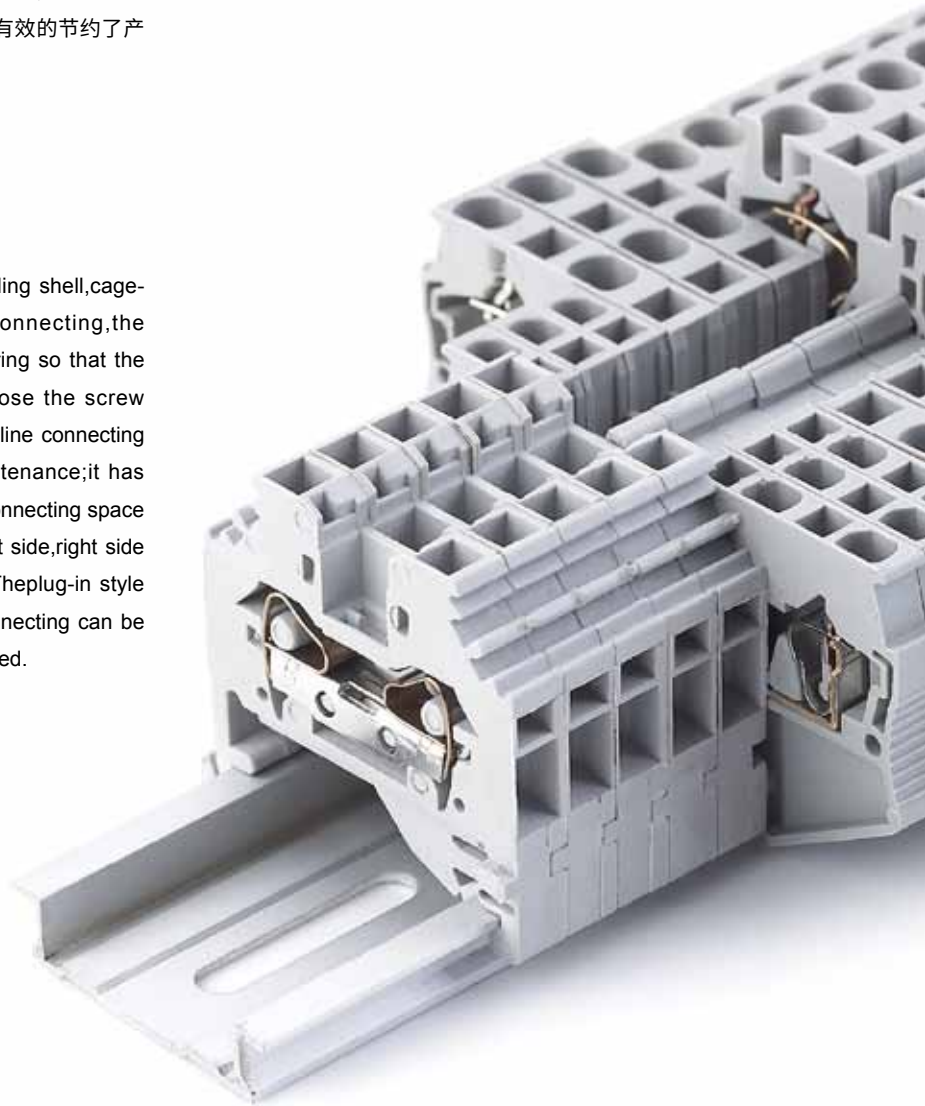

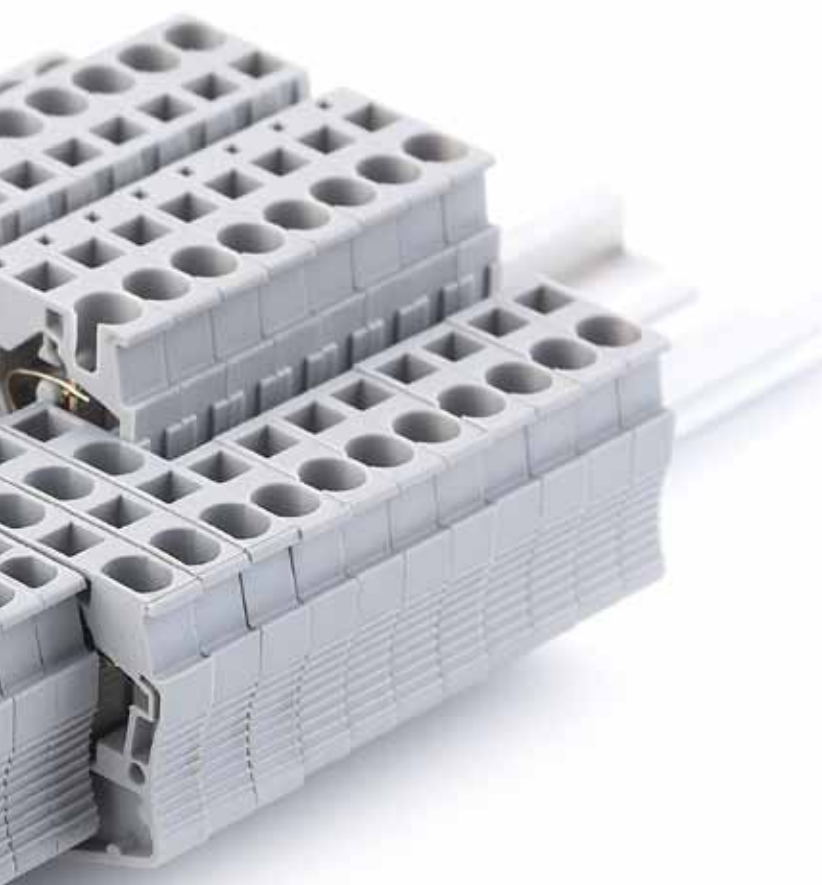

#### 回拉式弹簧端子

回拉式弹簧端子两侧各有两个的接线位，可解决电位分配问题。

使用回拉式弹簧端子可避免使用过多的桥接件，这样既可减短端子排的长度，使端子排结构布局清晰，又可节省接线费用。

#### Return-pulling spring terminal

Return-pulling spring terminal has two wiring position in both sides, which could resolve potential distribution question.

Using return-pulling type spring terminal could avoid using too many bridging components, which can shorten the length of terminal row, make terminal row's structure clearer and reduce wiring cost.

# Industrial Distribution Terminal Blocks

## Spring type terminal series

### 工业配电接线端子 - 弹簧类接线端子系列

本系列端子默认颜色：灰色 (GY)  
支持客户定制颜色



#### JUT3-1.5/GY 二导线贯通型接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高	4.2/48.5/36.5/44		
Thickness/Width/Height	mm		
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)
Rigid cable	Soft cable		
AWG:26-16	0.14-2.5	0.14-1.5	17.5 500
最大负载电流: 17.5A (1.5mm <sup>2</sup> 刚性导线)			
Maximum load current: 17.5A(1.5mm <sup>2</sup> rigid wire)			
IEC 60947-7-1			

JUT3

回拉式弹簧是从上面入线连结, 导线的入线口设在端子顶端, 其优点: 行线槽可靠近端子排安装, 能充分利用电气柜的空间, 提高了接线密度, 同时提供了观察接线位的良好角度, 方便接线。除此之外, 回拉式弹簧端子还具有如下特征:

清晰的标记系统:

最大的接线容量:

灵活的插拔式桥接件系统。

Return-pulling type spring terminal connects wire from upside, and the wire-in mouth of lead is set at the top of terminal, whose advantage is as follows: wire-crossing groove is installed adjacently to terminal row, which can make full use of space of electric cupboard, heighten wiring density, provide good angle for watching wiring position and simplify wiring operation.

Additionally, the return-pulling spring terminal owns following characteristics: clear mark system, maximum wiring capacity and flexible insert-pull type bridging component system.

#### 说明 Specification 简图 Schematic Drawing

回拉式弹簧接线端子: 可安装在 NS35 型导轨上。  
Return-pulling type spring terminal can be installed on tracks NS35 type.

(1) 端板 End plate



(2) 插拔式桥接件: 用于端子中央实现横向桥接  
齿背绝缘处可标识可分: 2-位、3-位、10-位  
Insert-pull type bridging component: used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit, 3-bit, 10-bit.



(3) 螺丝刀 Screwdriver



(4) 扁平标记条: 共 10 条, 每条 10 位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.



(5) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



(6) 终端固定件: 对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: imposing fixed function on terminal rows' termination the, mark clamp and mark strip can be blocked onto it for marking



型号 Model	订货号 Order Number
JUT3-1.5	灰色 (GY) 3010501001
	灰色 (GY) -M101 3010501083
	蓝色 (BE) 3010501031
G-JUT3-1.5/2.5	灰色 (GY) 3010502001
	蓝色 (BE) 3010502048
	橙色 (OR) 3010502049
	黄色 (YL) 3010502053
JFBS2-1.5	3010503029
JFBS3-1.5	3010503030
JFBS10-1.5	3010503031
STF0-0.4×2.5	3010113021
ZBFM4	3010505001
ZB4	3010108001
E/3	3010506001

# Industrial Distribution Terminal Blocks

## Spring type terminal series

工业配电接线端子 - 弹簧类接线端子系列



### JUT3-2.5/GY 二导线贯通型接线端子

#### Two-lead through-type wiring terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	4.2/48.5/36.5/44			
刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) Rigid cable Soft cable	I (A)	U (V)		
AWG:24-12 0.2-4 0.2-2.5	24	800		
最大负载电流: 31A (4mm <sup>2</sup> 刚性导线) Maximum load current: 31A(4mm <sup>2</sup> rigid wire) IEC 60947-7-1				

型号 Model	订货号 Order Number
JUT3-2.5	灰色 (GY) 3010501002
	灰色 (GY)-M101 3010501084
	蓝色 (BE) 3010501032
	橙色 (OR) 3010501033
	红色 (RD) 3010501070
黄色 (YL) 3010501116	
G-JUT3-1.5/2.5	灰色 (GY) 3010502001
	蓝色 (BE) 3010502048
	橙色 (OR) 3010502049
	黄色 (YL) 3010502053

JFBS2-2.5	3010503028
JFBS3-2.5	3010503032
JFBS10-2.5	3010503033

STF0-0.4×2.5	3010113021
--------------	------------

ZBFM5	3010505002
-------	------------

ZB5	3010108003
-----	------------

E/3	3010506001
-----	------------

### JUT3-4/GY 二导线贯通型接线端子

#### Two-lead through-type wiring terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	6.2/56/36.5/44			
刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) Rigid cable Soft cable	I (A)	U (V)		
AWG:24-10 0.5-6 0.5-4	32	800		
最大负载电流: 40A (6mm <sup>2</sup> 刚性导线) Maximum load current: 40A(6mm <sup>2</sup> rigid wire) IEC 60947-7-1				

型号 Model	订货号 Order Number
JUT3-4	灰色 (GY) 3010501003
	灰色 (GY)-M101 3010501085
	灰色 (GY)-M102 3010501102
	蓝色 (BE) 3010501034

G-JUT3-4	灰色 (GY) 3010502002
	蓝色 (BE) 3010502044

JFBS2-4	3010503034
JFBS3-4	3010503035
JFBS10-4	3010503036

STF2-0.8×4	3010113025
------------	------------

ZBFM6	3010505003
-------	------------

ZB6	3010108002
-----	------------

E/3	3010506001
-----	------------

### JUT3-6/GY 二导线贯通型接线端子

#### Two-lead through-type wiring terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	8.2/65.5/43.5/51			
刚性导线 (mm <sup>2</sup> ) 柔性导线 (mm <sup>2</sup> ) Rigid cable Soft cable	I (A)	U (V)		
AWG:24-8 0.5-10 0.5-6	41	1000		
最大负载电流: 52A (10mm <sup>2</sup> 刚性导线) Maximum load current: 52A(10mm <sup>2</sup> rigid wire) IEC 60947-7-1				

型号 Model	订货号 Order Number
JUT3-6	灰色 (GY) 3010501004
	灰色 (GY)-M101 3010501086
	蓝色 (BE)-M101 3010501071

G-JUT3-6	灰色 (GY) 3010502003
	蓝色 (BE) 3010502045

JFBS2-6	3010503037
JFBS3-6	3010503042
JFBS10-6	3010503048

STF2-0.8×4	3010113025
------------	------------

ZBFM8	3010505004
-------	------------

ZB8	3010505004
-----	------------

E/3	3010506001
-----	------------

JUT3

# Industrial Distribution Terminal Blocks

## Spring type terminal series

### 工业配电接线端子 - 弹簧类接线端子系列



#### JUT3-10/GY 二导线贯通型接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高	10.2/71.4/50.25/57.75	
Thickness/Width/Height	10.2/71.4/50.25/57.75	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I U
Rigid cable	Soft cable	(A) (V)
16-6	16-6	57 1000
最大负载电流: 56A (16mm <sup>2</sup> 刚性导线)		
Maximum load current: 56A(16mm <sup>2</sup> rigid wire)		
IEC 60947-7-1		

#### JUT3-16/GY 二导线贯通型接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高	12.2/80.4/51.1/62.25	
Thickness/Width/Height	12.2/80.4/51.1/62.25	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I U
Rigid cable	Soft cable	(A) (V)
16-4	16-4	76 1000
最大负载电流: 90A (25mm <sup>2</sup> 刚性导线)		
Maximum load current: 90A(25mm <sup>2</sup> rigid wire)		
IEC 60947-7-1		

#### 说明 Specification 简图 Schematic Drawing

#### 型号 Model 订货号 Order Number

#### 型号 Model 订货号 Order Number

回拉式弹簧接线端子: 可安装在 NS35 型导轨上。  
Retum-pulling type spring terminal  
can be installed on tracks NS35 type.

JUT3-10	灰色 (GY) 蓝色 (BE)	3010501061 3010501100
---------	--------------------	--------------------------

JUT3-16	灰色 (GY) 蓝色 (BE)	3010501062 3010501105
---------	--------------------	--------------------------

(1) 端板 End plate



G-JUT3-10	灰色 (GY) 蓝色 (BE)	3010502021 3010502046
-----------	--------------------	--------------------------

G-JUT3-16	灰色 (GY) 蓝色 (BE)	3010502022 3010502047
-----------	--------------------	--------------------------

(2) 插拔式桥接件: 用于端子中央实现横向桥接  
齿背绝缘处可标识可分: 2-位、3-位、10-位  
Insert-pull type bridging component: used  
to realize crosswise bridging at center of  
terminal,the mark of rail insulation can be  
divided into:2-bit,3-bit,10-bit.



JFBS2-10	3010503081
JFBS10-10	3010503117

JFBS2-16	3010503082
----------	------------

(3) 螺丝刀 Screwdriver



(4) 扁平标记条: 共 10 条, 每条 10 位  
可嵌入端子外侧标识槽进行标示。  
Flat mark strip:10 strips totally,10 bits  
per strip,it could be plugged in mark  
groove of terminal outer side for marking.



(5) 标记条: 有横向和竖向两种字体, 10 位。  
Mark bar: two character styles,  
with horizontal and vertical  
arrangements, ten spaced.



ZB10	3010108005
------	------------

ZB12	3010108128
------	------------

(6) 终端固定件: 对端子排终端其固定件作  
用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component:Imposing  
fixed function on terminal rows's  
termination the,mark clam pand mark  
strip can be blocked onto it for marking



E/B	3010506001
-----	------------

E/B	3010506001
-----	------------

JUT3

# Industrial Distribution Terminal Blocks

## Spring type terminal series

工业配电接线端子 - 弹簧类接线端子系列



### JUT3-35/GY 二导线贯通型接线端子

#### Two-lead through-type wiring terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height 16.2/99.8/59.1/66.6

刚性导线 (mm <sup>2</sup> ) Rigid cable	柔性导线 (mm <sup>2</sup> ) Soft cable	I (A)	U (V)
14-2	14-2	125	1000

最大负载电流: 125A (35mm<sup>2</sup> 刚性导线)  
Maximum load current: 125A(35mm<sup>2</sup> rigid wire)  
IEC 60947-7-1

型号 Model	订货号 Order Number
JUT3-35	灰色 (GY) 3010501063
	蓝色 (BE) 3010501106
G-JUT3-35	灰色 (GY) 3010502023
	蓝色 (BE) 3010502043
JFBS2-35	3010503083
ZB16	3010108150
E/B	3010506001

JUT3



# Industrial Distribution Terminal Blocks

## Spring type terminal series

### 工业配电接线端子 - 弹簧类接线端子系列



**JUT3-1.5/1-2/GY** 三导线贯通型接线端子  
Three-lead through-type wiring terminal

**JUT3-2.5/1-2/GY** 三导线贯通型接线端子  
Three-lead through-type wiring terminal

厚 / 宽 / 高	4.2/60.5/36.5/44			
Thickness/Width/Height	mm/mm/mm/mm			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:26-16	0.14-2.5	0.14-1.5	17.5	500
IEC 60947-7-1				

厚 / 宽 / 高	5.2/60.5/36.5/44			
Thickness/Width/Height	mm/mm/mm/mm			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	U	
Rigid cable	Soft cable	(A)	(V)	
AWG:24-12	0.2-4	0.2-2.5	24	800
IEC 60947-7-1				

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
<p>回拉式弹簧接线端子：可安装在 NS35 型导轨上。 Retum-pulling type spring terminal can be installed on tracks NS35 type.</p>		JUT3-1.5/1-2	灰色 (GY) 3010501005	JUT3-2.5/1-2	灰色 (GY) 3010501006 蓝色 (BE) 3010501027 灰色 (GY) -M101 3010501081
(1) 端板 End plate		G-JUT3-2.5/1-2	灰色 (GY) 3010502004	G-JUT3-2.5/1-2	灰色 (GY) 3010502004
(2) 插拔式桥接件：用于端子中央实现横向桥接 齿背绝缘处可标识可分：2-位、3-位、10-位 Insert-pull type bridging component: used to realize crosswise bridging at center of terinal,the mark of rail insulation can be divided into:2-bit,3-bit,10-bit.		JFBS2-1.5 3010503029 JFBS3-1.5 3010503030 JFBS10-1.5 3010503031		JFBS2-2.5 3010503028 JFBS3-2.5 3010503032 JFBS10-2.5 3010503033	
(3) 螺丝刀 Screwdriver		STF2-0.4×2.5 3010113021		STF2-0.6×3.5	
(4) 扁平标记条：共 10 条，每条 10 位 可嵌入端子外侧标识槽进行标示。 Flat mark strip:10 strips totally,10 bits per strip,it could be plugged in mark groove of terminal outer side for marking.		ZBFM4 3010505001		ZBFM5 3010505002	
(5) 标记条：有横向和竖向两种字体，10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		ZB4 3010108001		ZB5 3010108003	
(6) 终端固定件：对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。 Terminal fixed componernt:Imposing fixed functionon terminal rows' termination the,mark clam pand mark strip can be blocked onto it for marking		E/3 3010506001		E/3 3010506001	

JUT3

# Industrial Distribution Terminal Blocks

## Spring type terminal series

工业配电接线端子 - 弹簧类接线端子系列



**JUT3-6/1-2/GY** 二导线贯通型接线端子  
Two-lead through-type wiring terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	8.2/78/41.7/49.2			
刚性导线 (mm <sup>2</sup> ) Rigid cable	柔性导线 (mm <sup>2</sup> ) Soft cable	I (A)	U (V)	
24-8	24-10	40	800	
IEC 60947-7-1				

**JUT3-1.5/2-2/GY** 四导线贯通型接线端子  
Four-lead through-type wiring terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	5.2/72/36.5/44			
刚性导线 (mm <sup>2</sup> ) Rigid cable	柔性导线 (mm <sup>2</sup> ) Soft cable	I (A)	U (V)	
AWG:26-16	0.14-2.5	0.14-1.5	17.5	500
IEC 60947-7-1				

**JUT3-2.5/2-2/GY** 四导线贯通型接线端子  
Four-lead through-type wiring terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	5.2/72/36.5/44			
刚性导线 (mm <sup>2</sup> ) Rigid cable	柔性导线 (mm <sup>2</sup> ) Soft cable	I (A)	U (V)	
AWG:24-12	0.2-4	0.2-2.5	24	800
IEC 60947-7-1				

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUT3-6/1-2	灰色 (GY)	3010501044	JUT3-1.5/2-2	灰色 (GY)	3010501009
	蓝色 (BE)	3010501045		蓝色 (BE)	3010501053
G-JUT3-6/1-2	灰色 (GY)	3010502020	G-JUT3-2.5/2-2	灰色 (GY)	3010502006
				蓝色 (BE)	3010502018
JFBS2-6	3010503037	JFBS2-1.5	3010503029	JFBS2-2.5	3010503028
JFBS3-6	3010503042	JFBS3-1.5	3010503030	JFBS3-2.5	3010503032
JFBS10-6	3010503048	JFBS10-1.5	3010503031	JFBS10-2.5	3010503033
		STF2-0.4×2.5	3010113021	STF2-0.6×3.5	
ZBFM8	3010505004	ZBFM4	3010505001	ZBFM5	3010505002
ZB8	3010108004	ZB4	3010108001	ZB5	3010108003
E/3	3010506001	E/3	3010506001	E/3	3010506001

JUT3

# Industrial Distribution Terminal Blocks

## Spring type terminal series

### 工业配电接线端子 - 弹簧类接线端子系列

#### 四线回拉式弹簧端子

四线回拉式弹簧端子有三个电位相同的接线位，用 JUT3 的组合端子可对电位或才输入信号直行完美的分配。三线回拉式弹簧端子在中部设有两个桥接孔，通过它们可与相邻端子组成任意形成的跨接。

#### Four -lead return-puling terminal

Four -lead return-puling type spring terminalowns three wiring potentials with the same electrical potential, using JUT3 combination terminal could conduct perfect distribution of electrical potentials or input signals. Three-lead return-pulling type terminal owns two bridging hole in center section,through which bridging could of any form be realized with adjacent terminal.

#### 四线回拉式弹簧接地端子

四线回拉式弹簧接地端子与等额定截面积的贯通端子的轮廓与厚度相同。黄绿色的标志使之更清晰易辨。端板、标记条等与同类贯通端子使用。

#### Four -lead return-pulling type spring landing terminal

Four -lead return-pulling type spring landing terminal owns the same outline and thickness asthrough terminal with same rated section area, theyellow/green mark makes it clearer for beingdistinguished.

The end plate mark strip and the similar through terminal are universally used.



#### JUT3-4/2-2/GY 四导线贯通型接线端子

##### Four-lead through-type wiring terminal

厚 / 宽 / 高 / 高	6.2/87/36.5/44			
Thickness/Width/Height/Height				
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)
	Rigid cable	Soft cable	(A)	(V)
AWG:24-10	0.5-6	0.5-4	40	800
IEC 60947-7-1				

#### JUT3-1.5/2/GY 双层接线端子

##### Double-layer wiring terminal

厚 / 宽 / 高 / 高	4.2/67.5/49/56.5			
Thickness/Width/Height/Height				
	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)
	Rigid cable	Soft cable	(A)	(V)
AWG:26-16	0.14-2.5	0.14-1.5	17.5	500
IEC 60947-7-1				

### JUT3

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
回拉式弹簧接线端子：可安装在 NS35 型导轨上。 Return-puling type spring terminal can be installed on tracks NS35 type.		JUT3-4/2-2	灰色 (GY) 蓝色 (BE) 3010501026 3010501029	JUT3-1.5/2	灰色 (GY) 3010501012
(1) 端板 End plate		G-JUT3-4/2-2	灰色 (GY) 蓝色 (BE) 3010502007 3010502019	G-JUT3-2.5/2	灰色 (GY) 3010502008
(2) 插拔式桥接件：用于端子中央实现横向桥接 齿背绝缘处可标识可分：2-位、3-位、10-位 Insert-pull type bridging component: used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit, 3-bit, 10-bit.		JFBS2-4 JFBS3-4 JFBS10-4	3010503034 3010503035 3010503036	JFBS2-1.5 JFBS3-1.5 JFBS10-1.5	3010503029 3010503030 3010503031
(3) 螺丝刀 Screwdriver		STF2-0.8×4	3010113025	STF0-0.4×2.5	3010113021
(4) 扁平标记条：共 10 条，每条 10 位 可嵌入端子外侧标识槽进行标识。 Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.		ZBFM6	3010505003	ZBFM4	3010505001
(5) 标记条：有横向和竖向两种字体，10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		ZB6	3010108002	ZB4	3010108001
(6) 终端固定件：对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。 Terminal fixed component: Imposing fixed function on terminal rows's termination the, mark clam pand mark strip can be blocked onto it for marking		E/3	3010506001	E/3	3010506001

# Industrial Distribution Terminal Blocks

## Spring type terminal series

工业配电接线端子 - 弹簧类接线端子系列



JUT3-2.5/2/GY				JUT3-2.5/2-2X				JUT3-2.5/2L/GY							
双层接线端子		Double-layer wiring terminal		斜插四线接线端子		Diagonal four wire wiring terminal		双层接线端子		Double-layer wiring terminal					
厚 / 宽 / 高	厚 / 宽 / 高	厚 / 宽 / 高	厚 / 宽 / 高	厚 / 宽 / 高	厚 / 宽 / 高	厚 / 宽 / 高	厚 / 宽 / 高	厚 / 宽 / 高	厚 / 宽 / 高	厚 / 宽 / 高	厚 / 宽 / 高				
Thickness/Width/Height	Thickness/Width/Height	Thickness/Width/Height	Thickness/Width/Height	Thickness/Width/Height	Thickness/Width/Height	Thickness/Width/Height	Thickness/Width/Height	Thickness/Width/Height	Thickness/Width/Height	Thickness/Width/Height	Thickness/Width/Height				
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)				
Rigid cable	Soft cable	(A)	(V)	Rigid cable	Soft cable	(A)	(V)	Rigid cable	Soft cable	(A)	(V)				
AWG:24-12	0.2-4	0.2-2.5	24	500	AWG:24-12	0.2-4	0.2-2.5	24	500	AWG:24-12	0.2-4	0.2-2.5	24	500	
IEC 60947-7-1					IEC 60947-7-1					IEC 60947-7-1					
型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUT3-2.5/2	灰色 (GY) 蓝色 (BE) 红色 (RD)	3010501013 3010501042 3010501118	JUT3-2.5/2-2X	灰色 (GY)	3010501117	JUT3-2.5/2L	灰色 (GY)	3010501107	G-JUT3-2.5/2	灰色 (GY)	3010502008	JFBS2-2.5	3010503028	JFBS3-2.5	3010503032
												JFBS10-2.5	3010503038	JFBS2-2.5	3010503028
												JFBS3-2.5	3010503032	JFBS3-2.5	3010503032
												JFBS10-2.5	3010503038	JFBS10-2.5	3010503038
												STF1-0.6×3.5		STF1-0.6×3.5	
												STF1-0.6×3.5		STF1-0.6×3.5	
												ZBFM5	3010505002	ZBFM5	3010505002
												ZBFM5	3010505002	ZBFM5	3010505002
												ZB5	3010108003	ZB5	3010108003
												ZB5	3010108003	ZB5	3010108003
												E/3	3010506001	E/3	3010506001
												E/3	3010506001	E/3	3010506001

JUT3

# Industrial Distribution Terminal Blocks

## Spring type terminal series

### 工业配电接线端子 - 弹簧类接线端子系列

#### 双层回拉式弹簧子

双层回拉式弹簧子可在一个端子上接两个不同的电位，相对于额定截面和厚度相同的单层端子而言，双层接线节约了50%的导轨长度，双层端子的上下层均可桥接和标识，以完成不同的接线任务，并使导线回路归属关系清晰易辨。

#### Double-layer return-pulling spring terminal

Double-layer return-pulling spring terminal can be connected with two different potentials on one terminal, compared with single-layer terminal with the same rated section and thickness, the double-layer wiring could save 50% of track length, the upper/lower layer of double-layer terminal both can be bridge connected and marked in order to finish different wiring duty, making lead circuit ownership relationship clearer for being distinguished.



#### JUT3-2.5/3/GY

#### 双层接线端子 Double-layer wiring terminal

厚 / 宽 / 高	5.2/6.7.5/4.7.5/5.5			
Thickness/Width/Height	5.2/6.7.5/4.7.5/5.5			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)	
Rigid cable	Soft cable	24	500	
AWG:24-12	0.2-4	0.2-2.5		
IEC 60947-7-1				

#### JUT3-4/2/GY

#### 双层接线端子 Double-layer wiring terminal

厚 / 宽 / 高	6.2/8.3.5/4.9/5.6.5			
Thickness/Width/Height	6.2/8.3.5/4.9/5.6.5			
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I (A)	U (V)	
Rigid cable	Soft cable	32	500	
AWG:24-10	0.5-6	0.5-4		
IEC 60947-7-1				

#### 说明 Specification 简图 Schematic Drawing

回拉式弹簧接线端子：可安装在 NS35 型导轨上。  
Return-pulling type spring terminal can be installed on tracks NS35 type.

JUT3

(1) 端板 End plate



(2) 插拔式桥接件：用于端子中央实现横向桥接，齿背绝缘处可标识，分为：2-位、3-位、10-位。  
Insert-pull type bridging component: used to realize crosswise bridging at center of terminal, the mark of rail insulation can be divided into: 2-bit, 3-bit, 10-bit.



(3) 螺丝刀 Screwdriver



(4) 扁平标记条：共 10 条，每条 10 位，可嵌入端子外侧标识槽进行标识。  
Flat mark strip: 10 strips totally, 10 bits per strip, it could be plugged in mark groove of terminal outer side for marking.



(5) 标记条：有横向和竖向两种字体，10 位。  
Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.



(6) 终端固定件：对端子排终端其固定件作用。标记条和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing fixed function on terminal rows' termination, the mark clam pand mark strip can be blocked onto it for marking.



#### 型号 Model

#### 订货号 Order Number

JUT3-2.5/3

灰色 (GY)

3010501111

G-JUT3-2.5/3

灰色 (GY)

3010502063

JFBS2-2.5

3010503028

JFBS3-2.5

3010503032

JFBS10-2.5

3010503038

STF2-0.6×3.5

#### 型号 Model

#### 订货号 Order Number

JUT3-4/2

灰色 (GY)

3010501014

蓝色 (BE)

3010501028

G-JUT3-4/2

灰色 (GY)

3010502099

JFBS2-4

3010503034

JFBS3-4

3010503035

JFBS10-4

3010503036

STF2-0.8×4

3010113025

ZBFM5

3010505002

ZBFM6

3010505003

ZB5

3010108003

E/3

3010506001


E/3

3010506001

# Industrial Distribution Terminal Blocks

## Spring type terminal series


工业配电接线端子 - 弹簧类接线端子系列

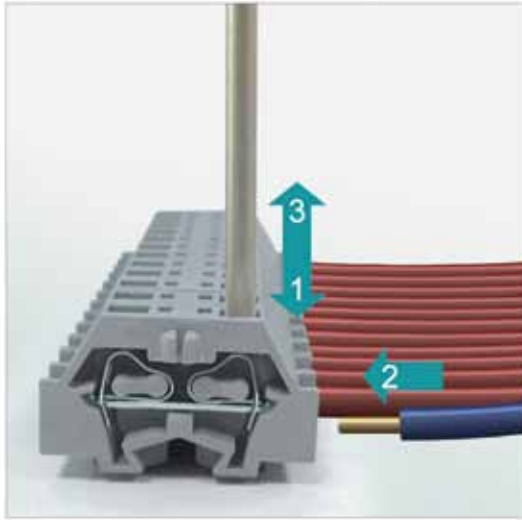


接线方法三步骤  
Three-step of wiring method



端板安装  
End plate installment



用不干胶标记条做标记  
Marked with non-dry glue identification strip



用跨接器进行跨界接  
Cross connection adaptor



边插安装  
Side-inserted installment





测试插头及其适配器的应用  
The application of test plug and its adapter

JUT3



型号 Model	JUT3-1.5F/GY	JUT3-2.5F/GY	JUT3-2.5F/2/GY	JUT3-4F/GY
订货号 Order Number	灰色 (GY) 3010501019 蓝色 (BE) 3010501022 橙色 (OR) 3010501023	灰色 (GY) 3010501020 橙色 (OR) 3010501025 绿色 (GN) 3010501035 灰色 (GY)-M101 3010501099 蓝色 (BE)-M101 3010501104	灰色 (GY) 3010501069 米黄色 (CM) 3010501087	灰色 (GY) 3010501021 橙色 (OR) 3010501036 蓝色 (BE) 3010501110
厚 / 宽 / 高 Thickness/Width/Height	5/25/17.2	6/28.4/18.2	10/28.4/18.2	7/33.5/23.2
额定截面 Rated section(mm <sup>2</sup> )	0.8-1.5	0.8-2.5	AWG:18-12	0.8-4
额定电压 Rated voltage(V)	400	500	500	690
额定电流 Rated current(A)	18	24	24	24
剥线长度 Line-shelling length(mm)	8-9	8-9	8-9	9-10

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
(1) 端板 End plate	 G-JUT3-1.5F	灰色 (GY) 3010502010	G-JUT3-2.5F	灰色 (GY) 3010502011 蓝色 (BE) 3010502013 米黄色 (CM) 3010502009 灰色 (GY)-M101 3010502040 蓝色 (BE)-M101 3010502042	G-JUT3-4F	灰色 (GY) 3010502012	

(2) 跨接器 Cross connection adaptor	 KJQ-1.5F	3010504011	KJQ-1.5F	3010504011	KJQ-1.5F	3010504011
-------------------------------------	--	------------	----------	------------	----------	------------

# Industrial Distribution Terminal Blocks

## Spring type terminal series

工业配电接线端子 - 弹簧类接线端子系列



型号 Model	JUT3-1.5W/GY		JUT3-2.5W/GY		JUT3-4W/GY	
订货号 Order Number	灰色 (GY)	3010501040	灰色 (GY)	3010501037	灰色 (GY)	3010501038
厚 / 宽 / 高 Thickness/Width/Height	4/43/38.3/45.8mm		5/42.77/38.2/45.7mm		6/42.2/40.4/47.9mm	
额定截面 Rated section(mm <sup>2</sup> )	0.08-1.5mm <sup>2</sup>		0.08-2.5mm <sup>2</sup>		0.08-4mm <sup>2</sup>	
额定电压 Rated voltage(V)	800V		800V		800V	
额定电流 Rated current(A)	18A		24A		32A	
剥线长度 Line-shelling length(mm)	8-9		8-9		8-9	
安装 Installing length(mm)	NS35		NS35		NS35	
中心联络件 Central adaptor	BE-1.5W		BE-2.5W	3010503057	BE-4W	3010503059
跨接联络件 Jumper connection	JC-1.5W		JC-2.5W	3010503062	JC-4W	3010503063

JUT3



型号 Model	JUT3-6W		JUT3-10W	
订货号 Order Number	灰色 (GY)	3010501041	灰色 (GY)	3010501072
厚 / 宽 / 高 Thickness/Width/Height	8/46.2/44.5/52mm		10/52/49.1/56.6mm	
额定截面 Rated section(mm <sup>2</sup> )	0.08-6mm <sup>2</sup>		0.08-10mm <sup>2</sup>	
额定电压 Rated voltage(V)	800V		800V	
额定电流 Rated current(A)	41A		57A	
剥线长度 Line-shelling length(mm)	12-13		12-13	
安装 Installing length(mm)	NS35		NS35	
中心联络件 Central adaptor	BE-6W	3010503060	BW-10W	3010503064
跨接联络件 Jumper connection	JC-6W	3010503061	JC-10W	3010503065

# Industrial Distribution Terminal Blocks

## Spring type terminal series

### 工业配电接线端子 - 弹簧类接线端子系列

本系列端子默认颜色：黄绿两色（PE）

#### 特征

与额定截面积相同的贯通端子的轮廓与厚度相一致；  
接地端子可直接与贯通端子相邻排列。当接地端子卡入导轨时就会自动与导轨电气相连，导轨即为接地总线；  
可标识，保证了导线与回路的归属关系清晰易辨。

#### Characteristic

Return-pulling type spring landing terminal owns following properties: its outline and thickness is the same as through terminal with the same rated section area, the landing terminal could be laid closnext to through terminal directly, when the landing terminal is plugged into track, it would be electrically connected with guide track auto matically, and the track is landing bus. The identification property ensures that the owner-ship relationship of lead and circuit is clear to distinguish.



#### JUT3-1.5PE 二导线贯通型接线端子

##### Two-lead through-type wiring terminal

厚 / 宽 / 高	4.2/48.5/36.5/44	
Thickness/Width/Height	mm/mm/mm	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	
Rigid cable	Soft cable	
AWG:24-16	0.14-2.5	0.14-1.5
IEC 60947-7-2		

#### JUT3-2.5PE 二导线贯通型接线端子

##### Two-lead through-type wiring terminal

厚 / 宽 / 高	4.2/48.5/36.5/44	
Thickness/Width/Height	mm/mm/mm	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	
Rigid cable	Soft cable	
AWG:24-12	0.2-4	0.2-2.5
IEC 60947-7-2		

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
回拉式弹簧接线端子：可安装在 NS35 型导轨上。 Return-pulling type spring terminal can be installed on tracks NS35 type.		JUT3-1.5PE	黄 + 绿 (PE) 3010501015	JUT3-2.5PE	黄 + 绿 (PE) 3010501016
(1) 端板 End plate		G-JUT3-1.5/2.5	灰色 (GY) 3010502001 蓝色 (BE) 3010502048 橙色 (OR) 3010502049 黄色 (YL) 3010502053	G-JUT3-1.5/2.5	灰色 (GY) 3010502001 蓝色 (BE) 3010502048 橙色 (OR) 3010502049 黄色 (YL) 3010502053

JUT3



#### JUT3-1.5/1-2PE 三导线贯通型接线端子

##### Three-lead through-type wiring terminal

厚 / 宽 / 高	4.2/60.5/36.5/44	
Thickness/Width/Height	mm/mm/mm	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	
Rigid cable	Soft cable	
AWG:24-16	0.14-2.5	0.14-1.5
IEC 60947-7-2		

#### JUT3-2.5/1-2PE 三导线贯通型接线端子

##### Three-lead through-type wiring terminal

厚 / 宽 / 高	5.2/60.5/36.5/44	
Thickness/Width/Height	mm/mm/mm	
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	
Rigid cable	Soft cable	
AWG:24-12	0.2-4	0.2-2.5
IEC 60947-7-2		

型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUT3-1.5/1-2PE	黄 + 绿 (PE) 3010501007	JUT3-2.5/1-2PE	黄 + 绿 (PE) 3010501008
G-JUT3-2.5/1-2	灰色 (GY) 3010502004	G-JUT3-2.5/1-2	灰色 (GY) 3010502004



# Industrial Distribution Terminal Blocks

## Spring type terminal series

### 工业配电接线端子 - 弹簧类接线端子系列

本系列端子默认颜色：黄绿两色（PE）

#### 特征

与额定截面相同的贯通端子的轮廓与厚度相一致；  
接地端子可直接与贯通端子相邻排列。当接地端子卡入导轨时就会自动与导轨电气相连，导轨即为接地总线；  
可标识，保证了导线与回路的归属关系清晰易辨。

#### Characteristic

Return-pulling type spring landing terminal owns following properties: its outline and thickness is the same as through terminal with the same rated section area, the landing terminal could be laid crosnext to through terminal directly, when the landing terminal is plugged into track, it would be electrically connected with guide track auto matically, and the track is landing bus. The identification property ensures that the owner-ship relationship of lead and circuit is clear to distinguish.



#### JUT3-1.5/2-2PE 四导线贯通型接线端子 Four-lead through-type wiring terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	4.2/72/36.5/44	
刚性导线 (mm <sup>2</sup> ) Rigid cable	0.14-2.5	
柔性导线 (mm <sup>2</sup> ) Soft cable	0.14-1.5	
AWG:26-16 IEC 60947-7-2		

#### JUT3-2.5/2-2PE 四导线贯通型接线端子 Four-lead through-type wiring terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	5.2/72/36.5/44	
刚性导线 (mm <sup>2</sup> ) Rigid cable	0.2-4	
柔性导线 (mm <sup>2</sup> ) Soft cable	0.2-2.5	
AWG:24-12 IEC 60947-7-2		

#### 说明 Specification 简图 Schematic Drawing

回拉式弹簧接线端子：可安装在 NS35 型导轨上。  
Return-pulling type spring terminal  
can be installed on tracks NS35 type.

#### 型号 Model 订货号 Order Number

JUT3-1.5/2-2PE 黄 + 绿 (PE) 3010501049

#### 型号 Model 订货号 Order Number

JUT3-2.5/2-2PE 黄 + 绿 (PE) 3010501011

JUT3

(1) 端板 End plate



G-JUT3-2.5/2-2 灰色 (GY) 3010502006  
蓝色 (BE) 3010502018

G-JUT3-2.5/2-2 灰色 (GY) 3010502006  
蓝色 (BE) 3010502018



#### JUT3-4/2-2PE 四导线贯通型接线端子 Four-lead through-type wiring terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	6.2/87/36.5/44	
刚性导线 (mm <sup>2</sup> ) Rigid cable	0.5-6	
柔性导线 (mm <sup>2</sup> ) Soft cable	0.5-4	
AWG:24-10 IEC 60947-7-2		

#### JUT3-4PE 二导线贯通型接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	6.2/56/36.5/44	
刚性导线 (mm <sup>2</sup> ) Rigid cable	0.5-6	
柔性导线 (mm <sup>2</sup> ) Soft cable	0.5-4	
AWG:24-10 IEC 60947-7-2		

#### JUT3-6PE 二导线贯通型接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	8.2/65.5/43.5/51	
刚性导线 (mm <sup>2</sup> ) Rigid cable	0.5-10	
柔性导线 (mm <sup>2</sup> ) Soft cable	0.5-4	
AWG:24-8 IEC 60947-7-2		

#### 型号 Model 订货号 Order Number

JUT3-4/2-2PE 黄 + 绿 (PE) 3010501043

#### 型号 Model 订货号 Order Number

JUT3-4PE 黄 + 绿 (PE) 3010501017

#### 型号 Model 订货号 Order Number

JUT3-6PE 黄 + 绿 (PE) 3010501018

G-JUT3-4/2-2 灰色 (GY) 3010502007  
蓝色 (BE) 3010502019

G-JUT3-4 灰色 (GY) 3010502002  
蓝色 (BE) 3010502044

G-JUT3-6 灰色 (GY) 3010502003  
蓝色 (BE) 3010502045

# Industrial Distribution Terminal Blocks

## Spring type terminal series

### 工业配电接线端子 - 弹簧类接线端子系列






#### JUT3-10PE 二导线贯通型接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 10.2/71.4/50.25/57.75  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
16-6 16-6  
IEC 60947-7-2

#### JUT3-16PE 二导线贯通型接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 12.2/80.4/51.1/58.6  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
16-4 16-4  
IEC 60947-7-2




说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
<p>回拉式弹簧接线端子：可安装在 NS35 型导轨上。 Return-pulling type spring terminal can be installed on tracks NS35 type.</p>	JUT3-10PE	黄 + 绿 (PE) 3010501064	JUT3-16PE	黄 + 绿 (PE) 3010501065
<p>(1) 端板 End plate</p> 	G-JUT3-10	灰色 (GY) 3010502021 蓝色 (BE) 3010502046	G-JUT3-16	灰色 (GY) 3010502022 蓝色 (BE) 3010502047
<p>(2) 标记条：有横向和竖向两种字体，10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.</p> 				
<p>(3) 终端固定件：对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。 Terminal fixed component: Imposing fixed function on terminal rows's termination the, mark clam pand mark strip can be blocked onto it for marking</p> 	E/B	3010110005	E/B	3010110005

JUT3



#### JUT3-35PE 二导线贯通型接线端子 Two-lead through-type wiring terminal

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 16.2/99.8/59.1/66.6  
刚性导线 (mm<sup>2</sup>) 柔性导线 (mm<sup>2</sup>)  
Rigid cable Soft cable  
14-2 14-2  
AWG: 16-6  
IEC 60947-7-2

说明 Specification 简图 Schematic Drawing	型号 Model	订货号 Order Number
<p>回拉式弹簧接线端子：可安装在 NS35 型导轨上。 Return-pulling type spring terminal can be installed on tracks NS35 type.</p>	JUT3-35PE	黄 + 绿 (PE) 3010501066
<p>(1) 端板 End plate</p> 	G-JUT3-35	灰色 (GY) 3010502023 蓝色 (BE) 3010502043
<p>(2) 标记条：有横向和竖向两种字体，10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.</p> 		
<p>(3) 终端固定件：对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。 Terminal fixed component: Imposing fixed function on terminal rows's termination the, mark clam pand mark strip can be blocked onto it for marking</p> 	E/B	3010110005

# Industrial Distribution Terminal Blocks

## Base type terminal series

工业配电接线端子 - 基座型接线端子系列



### JUT4B-4W

基座型二位接线端子 Base-type two-bit terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	6.2/26.3/32
接线容量 Wiring capacity: 0.5-6mm <sup>2</sup>	I U (A) (V) 36 600
AWG:20-8 IEC 60947-7-1	

型号 Model	订货号 Order Number
JUT4B-4W	橙色 (OR) 3010601019

### JUT4B-4/2/OR

基座型二位接线端子 Base-type two-bit terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	22/21/21
接线容量 Wiring capacity: 0.5-6mm <sup>2</sup>	I U (A) (V) 36 600
AWG:20-8 IEC 60947-7-1	

型号 Model	订货号 Order Number
JUT4B-4/2	橙色 (OR) 3010601013

### JUT4B-4/3/OR

基座型三位接线端子 Base-type three-bit terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	33/21/21
接线容量 Wiring capacity: 0.5-6mm <sup>2</sup>	I U (A) (V) 36 600
AWG:20-8 IEC 60947-7-1	

型号 Model	订货号 Order Number
JUT4B-4/3	橙色 (OR) 3010601002



### JUT4B-4/5/OR

基座型五位接线端子 Base-type five-bit terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	55/21/21
接线容量 Wiring capacity: 0.5-6mm <sup>2</sup>	I U (A) (V) 36 600
AWG:20-8 IEC 60947-7-1	

型号 Model	订货号 Order Number
JUT4B-4/5	橙色 (OR) 3010601014

### JUT4B-4/12/OR

基座型十二位接线端子 Base-type twelve-bit terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	132/21/21
接线容量 Wiring capacity: 0.5-6mm <sup>2</sup>	I U (A) (V) 36 600
AWG:20-8 IEC 60947-7-1	

型号 Model	订货号 Order Number
JUT4B-4/12	橙色 (OR) 3010601015

### JUT4BP-4/6/OR

六位接线端子 Six-bit terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	57/21/21
接线容量 Wiring capacity: 0.5-6mm <sup>2</sup>	I U (A) (V) 36 600
AWG:20-8 IEC 60947-7-1	

型号 Model	订货号 Order Number
JUT4BP-4/6	橙色 (OR) 3010601016



### JUT4BP-4/10/OR

十位接线端子 Ten-bit terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	81/21/21
接线容量 Wiring capacity: 0.5-6mm <sup>2</sup>	I U (A) (V) 36 600
AWG:20-8 IEC 60947-7-1	

型号 Model	订货号 Order Number
JUT4BP-4/10	橙色 (OR) 3010601017

### JUT4BP-4/12/OR

十二位接线端子 twelve-bit terminal

厚 / 宽 / 高 / 高 Thickness/Width/Height/ Height	93/21/21
接线容量 Wiring capacity: 0.5-6mm <sup>2</sup>	I U (A) (V) 36 600
AWG:20-8 IEC 60947-7-1	

型号 Model	订货号 Order Number
JUT4BP-4/12	橙色 (OR) 3010601018



### UDB1-25

基座型二位接线端子 Base-type two-bit terminal

间距	N/A
极数	1P
额定	690V/104A
线径	2-6AWG

型号 Model	订货号 Order Number
JUT3-4/2-2PE	灰色 (GY) 30801019 蓝色 (BE) 30801020 黄 + 绿 (YE+GN) 30801021

### UDB1-35/25

基座型二位接线端子 Base-type two-bit terminal

间距	N/A
极数	Free Assembly on din rail
额定	690V/125A
线径	1-4AWG

型号 Model	订货号 Order Number
JUT3-4PE	灰色 (GY) 30801022 蓝色 (BE) 30801023 黄 + 绿 (YE+GN) 30801024

# Industrial Distribution Terminal Blocks

## Thread type terminal series

### 工业配电接线端子 - 螺纹型接线端子系列

本系列端子默认颜色：灰色（PE）  
支持客户定制颜色。

导体截面 (mm<sup>2</sup>): Cu 2.5~50mm<sup>2</sup> Al 6~50mm<sup>2</sup>

导体尺寸 (AWG) : 1/0~6

材质：聚酰胺

安装类型：导轨安装

螺丝类型：内六角 Hexagon, 5mm<sup>2</sup>

工作温度 (C): -40 - +105°C

标准 :EN61238-1、EN60947-7-2

Conductor Cross-section(mm<sup>2</sup>): Cu 2.5~50mm<sup>2</sup>  
Al 6~50mm<sup>2</sup>

Conductor Size(AWG): 1/0~6

Housing: Polyamide

Mounting: DIN rail

Screw: Hexagon, 5mm

Operating Temperature(°C): -40-+105°C


Standard: EN61238-1, EN60947-7-2



JUT10-50/GY		JUT10-50/2GY		JUT10-50/03/GY		JUT10-95/GY	
厚 / 宽 / 高	17.7/51.2/45.3	厚 / 宽 / 高	29.8/49.2/45.3	厚 / 宽 / 高	49.6/51/43	厚 / 宽 / 高	42/89/51.5
Thickness/Width/Height		Thickness/Width/Height		Thickness/Width/Height		Thickness/Width/Height	
接线容量	2.5-50	接线容量	2.5-50	接线容量	2.5-50	接线容量	16-95
Wiring capacity: 0.5-6mm <sup>2</sup>		Wiring capacity: 0.5-6mm <sup>2</sup>		Wiring capacity: 0.5-6mm <sup>2</sup>		Wiring capacity: 0.5-6mm <sup>2</sup>	
I(A)	160	I(A)	160	I(A)	160	I(A)	245
U(V)	800	U(V)	800	U(V)	800	U(V)	800

说明 Specification	简图 Schematic Drawing	型号 Model		订货号 Order Number	
		灰色 (GY)	3011201001	灰色 (GY)	3011201014
		蓝色 (BE)	3011201002	蓝色 (BE)	3011201018
		黄 + 绿 (PE)	3011201003	黄 + 绿 (PE)	3011201019
		灰色 (GY)	3011201056	灰色 (GY)	3011201004
		蓝色 (BE)	3011201005	蓝色 (BE)	3011201005
		黄 + 绿 (PE)	3011201006	黄 + 绿 (PE)	3011201006

(1) 操作工具：内六角扳手 (mm)  
Operation tool: Allen wrench



5#

5#

(2) 终端固定件：对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing fixed function on terminal rows's termination the, mark clam pand mark strip can be blocked onto it for marking



E/3

E/3

E/3

E/3


JUT10



JUT10-95/2/GY		JUT10-150/GY		JUT10-240/GY	
厚 / 宽 / 高	42/89/51.5	厚 / 宽 / 高	28.6/98/60.5	厚 / 宽 / 高	37/130/66
Thickness/Width/Height		Thickness/Width/Height		Thickness/Width/Height	
接线容量	16-95	接线容量	35-150	接线容量	35-240
Wiring capacity: 0.5-6mm <sup>2</sup>		Wiring capacity: 0.5-6mm <sup>2</sup>		Wiring capacity: 0.5-6mm <sup>2</sup>	
I(A)	245	I(A)	320	I(A)	425
U(V)	800	U(V)	750	U(V)	800

说明 Specification	简图 Schematic Drawing	型号 Model		订货号 Order Number	
		灰色 (GY)	3011201015	灰色 (GY)	3011201007
		蓝色 (BE)	3011201016	蓝色 (BE)	3011201008
		黄 + 绿 (PE)	3011201017	黄 + 绿 (PE)	3011201009
		灰色 (GY)	3011201010	灰色 (GY)	3011201010
		蓝色 (BE)	3011201011	蓝色 (BE)	3011201011
		黄 + 绿 (PE)	3011201012	黄 + 绿 (PE)	3011201012

(1) 操作工具：内六角扳手 (mm)  
Operation tool: Allen wrench



6#

8#

10#

(2) 终端固定件：对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing fixed function on terminal rows's termination the, mark clam pand mark strip can be blocked onto it for marking



E/3

E/3

E/3

# JUT11 Power Distribution Terminal Block

## JUT11 系列通用端子

本系列端子默认颜色：蓝色盖板 (BE)  
支持客户定制颜色。



JUT11-80/BE			JUT11-125/BE			JUT11-160/BE		
80A IEC 60947-7-1 85Amp(UL 认证申请中 Applying) 模块化：单股进线，可用路线进行扩展， 可双倍中性线 Mouldar:Single-strand line,can be extended jumper,can be double neutral line			125A IEC 60947-7-1 150Amp(UL 认证申请中 Applying) 模块化：单股进线，可用路线进行扩展， 可双倍中性线 Mouldar:Single-strand line,can be extended jumper,can be double neutral line			160A IEC 60947-7-1 200Amp(UL 认证申请中 Applying) 模块化：单股进线，可用路线进行扩展， 可双倍中性线 Mouldar:Single-strand line,can be extended jumper,can be double neutral line		




型号 Model	订货号 Order Number	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
JUT11-80	蓝色 (BE) 3011301002	JUT11-125	蓝色 (BE) 3011301003	JUT11-160	蓝色 (BE) 3011301004

说明 Specification 简图 Schematic Drawing					说明 Specification 简图 Schematic Drawing					说明 Specification 简图 Schematic Drawing				
公制 Metric		mm <sup>2</sup>		I(N.m)	公制 Metric	mm <sup>2</sup>		I(N.m)	公制 Metric	mm <sup>2</sup>		I(N.m)		
	6...16	×1		3.5		10...35	×1	8.5		10...70	×1	8.5		
	2.5...6	×4		1.2		6...16**	×1	3.5		6...16**	×1	3.5		
	2.5...16	×2		3.5		2.5...16	×6	3.5		2.5...16	×6	3.5		
					** 或通用跳线 or niiversal jumper					** 或通用跳线 or niiversal jumper				
美规 U.S.	AMG		力矩 Torque		美规 U.S.	AMG		力矩 Torque	美规 U.S.	AMG		力矩 Torque		
	16...4	×1		19.5		8...1/0	×1	57		8...3/0	×1	75		
	16...8	×4		10.6		14...4	×1	31		14...4	×1	31		
	16...4	×2		19.5		14...4	×6	31		14...4	×6	31		

- I=80A IEC
- I=85A ULCSA
- Icw KA ms 3
- IPk KA: 22
- Ui: 1000V IEC
- Vir: 600V UL

- I=125A IEC
- I=150A ULCSA
- Icw KA ms 4.2
- IPk KA: 30
- Ui: 1000V IEC
- Vir: 600V UL

- I=160A IEC
- I=200A ULCSA
- Icw KA ms 11.8
- IPk KA: 30
- Ui: 1000V IEC
- Vir: 600V UL

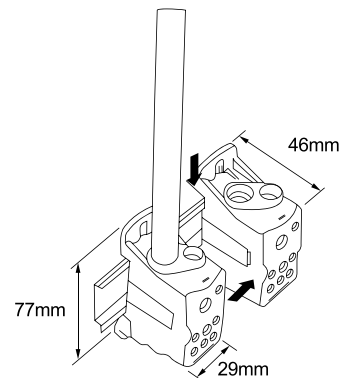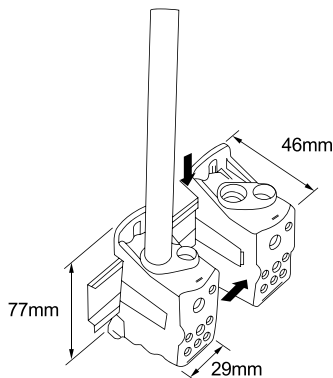

安装孔距 Mounting Holes: 54 mm

安装孔距 Mounting Holes: 64 mm

安装孔距 Mounting Holes: 64 mm

# JUT11 Power Distribution Terminal Block

## JUT11 系列通用端子



JUT11-250/BE			JUT11-400/BE			JUT11-500/BE		
250A IEC 60947-7-1 255Amp(UL 认证申请中 Applying) 模块化: 允许多极组合, 可用于单极, 二极, 三极, 四极 Mouldar: Allows a variety of combinations, can be used unipolar, bipolar, three poles, four poles			400A IEC 60947-7-1 335Amp(UL 认证申请中 Applying) 模块化: 允许多极组合, 可用于单极, 二极, 三极, 四极 Mouldar: Allows a variety of combinations, can be used unipolar, bipolar, three poles, four poles			500A IEC 60947-7-1 335Amp(UL 认证申请中 Applying) 模块化: 允许多极组合, 可用于单极, 二极, 三极, 四极 Mouldar: Allows a variety of combinations, can be used unipolar, bipolar, three poles, four poles		
型号 Model	订货号 Order Number		型号 Model	订货号 Order Number		型号 Model	订货号 Order Number	

JUT11-250 蓝色 (BE) 3011301005      JUT11-400 蓝色 (BE) 3011301006      JUT11-500 蓝色 (BE) 3011301007

说明 Specification 简图 Schematic Drawing				说明 Specification 简图 Schematic Drawing				说明 Specification 简图 Schematic Drawing			
公制 Metric		mm <sup>2</sup>	I(N.m)	公制 Metric		mm <sup>2</sup>	I(N.m)	公制 Metric		mm <sup>2</sup>	I(N.m)
美规 U.S.	AMG		力矩 Torque	美规 U.S.	AMG		力矩 Torque	美规 U.S.	AMG		力矩 Torque




- I=225A IEC
- I=255A ULCSA
- Icw KA ms 24.5
- IPk KA: 51
- Ui: 1000V IEC
- Vir: 600V UL

- I=400A IEC
- I=350A ULCSA
- Icw KA ms 24.5
- IPk KA: 51
- Ui: 1000V IEC
- Vir: 600V UL

- I=500A IEC
- I=335A ULCSA
- Icw KA ms 24.5
- IPk KA: 51
- Ui: 1000V IEC
- Vir: 600V UL

### TH 柔性母排

	4×15.5×0.8
	4×15.5×0.8
	2×20×1
	3×20×1
	4×20×1
	5×20×1
	6×2.0×1
	2×24×1
	3×24×1
	4×24×1
	5×24×1
	6×24×1
	8×24×1



安装孔距  
Install Aperture: 85×29mm

安装孔距  
Install Aperture: 85×29mm

安装孔距  
Install Aperture: 85×29mm

JUT11

# JUT11 Power Distribution Terminal Block

## JUT11 系列通用端子



本系列端子默认颜色：白色 (WT)  
支持客户定制颜色

### JUT11-200/1-9/WT

**集线盒接线端子：**  
产品设有 10 个接线孔位，主要应用于多根导线的汇流集中连接，可用于多根导线的电流汇总。

**产品应用领域：**  
防雷设备的导线连接；通讯、工业配电设备主线支线连接；一般民用入户线的分线连接等。电缆型仅适用于连接圆形电缆线。

Set box terminals:

The number of the product is equipped with 10 wiring, mainly used in wire junction.

Concentrated connection, can be used for many other one ground current summary.

Product application:


Lightning protection equipment wiring connection; Communications, industrial distribution equipment thread feeder, The connection; General civil RuHuXian ine connection, etc. Cable type is only at the connection round cable.

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 36/78.8/59.1  
接线容量  $1 \times 100\text{mm}^2; 9 \times 16\text{mm}^2$  (A) U(V)  
Connection capacity  $1 \times 100\text{mm}^2; 9 \times 16\text{mm}^2$  240 660  
IEC 60947-7-1

说明 Specification 简图 Schematic Drawing 型号 Model 订货号 Order Number

JUT11-200/1-9 灰色 (GY) 3011301032

(1) 操作工具：内六角扳手 (mm)  
Operation tool: Allen wrench








3#  
8#

(2) 终端固定件：对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing fixed function on terminal rows's termination the mark clamp and mark strip can be blocked onto it for marking



E/3 3010506001

(3) 外形尺寸  
External dimension

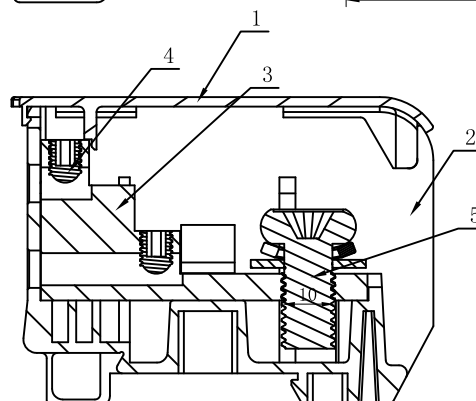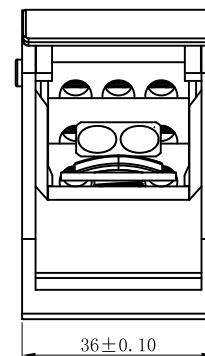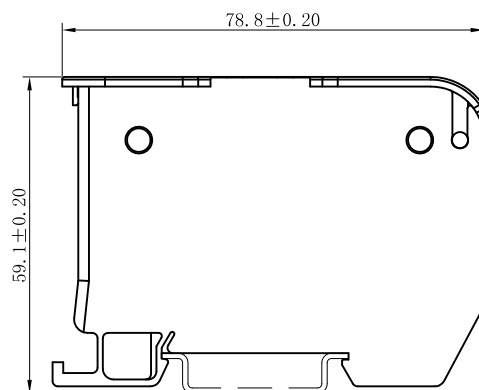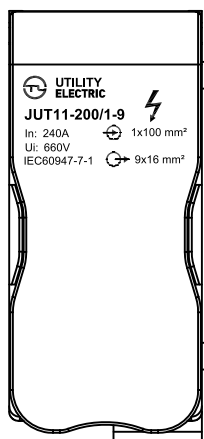

# Industrial Distribution Terminal Blocks

## Screw type terminal series

### 工业配电接线端子 - 螺钉类接线端子系列

本系列端子默认颜色：深灰色盖板 (DK/GY)  
支持客户定制颜色



#### JUT11-500C/DK/GY 集线盒接线端子 (电缆型) Junction box terminal block(Cable type)

厚 / 宽 / 高 / 高  
Thickness/Width/Height/ Height 49.5/100/55.2  
接线容量 1×100mm<sup>2</sup>;9×16mm<sup>2</sup> I(A) U(V)  
Connection capacity 1×100mm<sup>2</sup>;9×16mm<sup>2</sup> 500 1000  
IEC 60947-7-1

**集线盒接线端子：**  
产品设有 10 个接线孔位，主要应用于多根导线的汇流集中连接，可用于多根导线的电流汇总。  
**产品应用领域：**  
防雷设备的导线连接；通讯、工业配电设备主线支线连接；一般民用入户线的分线连接等。电缆型仅适用于连接圆形电缆线。

**Set box terminals:**

The number of the product is equipped with 10 wiring, mainly used in wire junction.

Concentrated connection, can be used for many other one ground current summary.


**Product application:**

Lightning protection equipment wiring connection; Communications, industrial distribution equipment thread feeder, The connection; General civil RuHuXian ine connection, etc. Cable type is only at the connection round cable.

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number
------------------	----------------------	----------	------------------

JUT11-500C	灰色 (GY)	3011701002
------------	---------	------------

(1) 操作工具：内六角扳手 (mm)  
Operation tool: Allen wrench








3#  
4#  
5#  
10#

(2) 终端固定件：对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component: Imposing fixed function on terminal rows's termination the, mark clam pand mark strip can be blocked onto it for marking



E/3	3010506001
-----	------------

(3) 外形尺寸  
External dimension

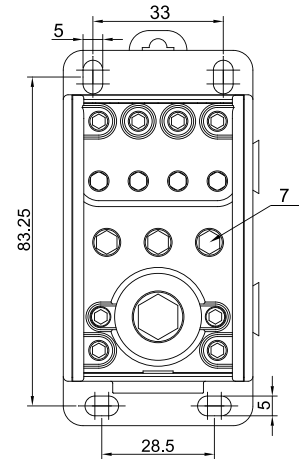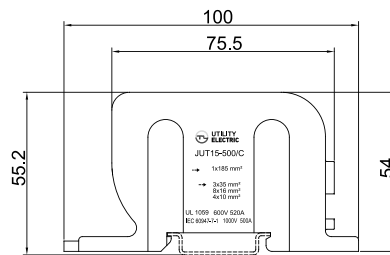

JUT11



# Industrial Distribution Terminal Blocks

## Screw type terminal series

### 工业配电接线端子 - 螺钉类接线端子系列



#### JUT11-500F/GY 集线盒接线端子 (柔性母排型) Junction box terminal block(Flexible bus bar)

厚 / 宽 / 高 / 高	49.5/100/55.2	
Thickness/Width/Height/ Height		
接线容量	50~150mm <sup>2</sup> (Cable)	I(A) U(V)
Connection capacity	10×30×1(Flexible busbars);	500 1000
IEC 60947-7-1	4×10mm <sup>2</sup> ;6×16mm <sup>2</sup> ; 3×35mm <sup>2</sup> 5×(6×15.5×0.8)	
	Flexible busbars	

**集线盒接线端子：**  
产品设有 10 个接线孔位，主要应用于多根导线的汇流集中连接，可用于多根导线的电流汇总。  
**产品应用领域：**  
防雷设备的导线连接；通讯、工业配电设备主线支线连接；一般民用入户线的分线连接等。电缆型仅适用于连接圆形电缆线。

**Set box terminals:**

The number of the product is equipped with 10 wiring, mainly used in wire junction.

Concentrated connection, can be used for many other one ground current summary.


**Product application:**

Lightning protection equipment wiring connection; Communications, industrial distribution equipment thread feeder,The connection;General civil RuHuXian ine connection,etc.Cable type is only at the connection round cable.

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number
------------------	----------------------	----------	------------------

JUT11-500F 灰色 (GY) 3011701001

(1) 操作工具：内六角扳手 (mm)  
Operation tool: Allen wrench








3#  
4#  
5#  
10#

(2) 终端固定件：对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。  
Terminal fixed component:Imposing fixed function on terminal rows's termination the,mark clam pand mark strip can be blocked onto it for marking



E/3 3010506001

(3) 外形尺寸  
External dimension

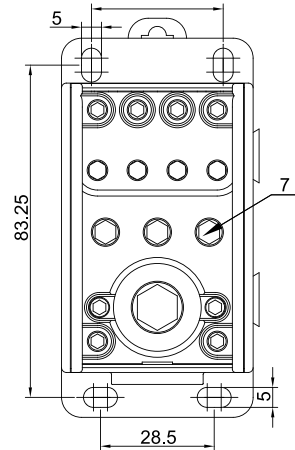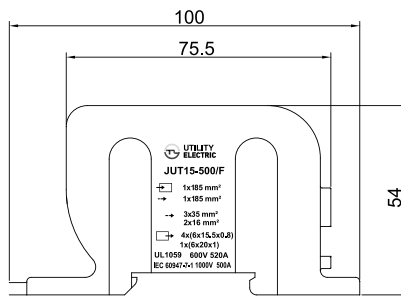

JUT11

# Spring classes Screw type

## 螺钉类 - 接线端子





本系列端子默认颜色：深白色 (GY)  
支持客户定制颜色

### JUT13-35/GY 一进四处分线端子 One into four out of the terminal

### JUT13-95/GY 一进四处分线端子 One into four out of the terminal

厚 / 宽 / 高	43/60/41
Thickness/Width/Height	
刚性导线 (mm <sup>2</sup> )	I U
Rigid cable	(A) (V)
柔性导线 (mm <sup>2</sup> )	
Soft cable	
12-2	125 630
IEC 60947-7-1	

厚 / 宽 / 高	56.3/80.5/60
Thickness/Width/Height	
柔性导线 (mm <sup>2</sup> )	I U
Soft cable	(A) (V)
10-000	232 630
IEC 60947-7-1	

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number	型号 Model	订货号 Order Number
可安装在 NS35 型导轨上。 can be installed on tracks NS35 type.		JUT13-35	灰色 (GY) 3011501001	JUT13-35PE	灰色 (GY) 3011501002
(1) 螺丝刀 (mm) Screwdriver		十字: 2# Cross 一字: 0.5×5.5 A word		十字: 2# Cross 一字: 1×6.5 A word	
(2) 操作工具: 套筒 Operation tool: The sleeve				S=14	
(3) 终端固定件: 对端子排终端其固定件作用。标记夹和标记条可卡在它上进行标识。 Terminal fixed component. Imposing fixed function on terminal rows's termination the, mark clam pand mark strip can be blocked onto it for marking		E/3	3010506001	E/3	3010506001

JUT13

# Industrial Distribution Terminal Blocks

## Screw type terminal series

### 工业配电接线端子 - 螺钉类接线端子系列



本系列端子默认颜色：灰色 (GY)  
支持客户定制颜色


导轨安装型 OT 端子连接器：  
该系列产品采用螺纹压接 OT 端子的方式完成导线之间的连接，应用于大电缆高电流之间的互联。可应用于低压电力输送、工业配电、建筑配线等领域。

Guide installation type OT terminal connector:  
This series of products is used to connect the wire between the wires and the connection between the wires, which is applied to the connection between high current and high current. It can be used in low voltage power transmission, industrial distribution, construction wiring and other fields.



型号 Model	JUT17-25/GY	JUT17-50/GY	JUT17-90/GY	JUT17-150/GY	JUT17-240/GY
端子类型 Terminal type	OT 端头连接器 OT end connector				
订货型号 Order Number	灰色 (GY) 3011801001	灰色 (GY) 3011801002	灰色 (GY) 3011801003	灰色 (GY) 3011801004	灰色 (GY) 3011801005
厚 (W)/ 宽 (L)/ 高 (H1):mm Thick (W)/width (L)/height (H1)	26/88/48	32/94/50	41/110/52	46.5/110/52	53.5/125/54
接线容量 Connection capacity	10-25mm <sup>2</sup>	20-50mm <sup>2</sup>	50-95mm <sup>2</sup>	95-150mm <sup>2</sup>	150-240mm <sup>2</sup>
OT 端子孔径 (mm) Terminal aperture(mm)	6	8	10	10	12
操作工具：扳手开口 (mm) Operation tool:wrench opening	10	13	17	17	19
I(A)	100	150	200	275	400
U(V)	1000	1000	1000	1000	1000

JUT17

说明 Specification	简图 Schematic Drawing	型号 Model	订货号 Order Number
(1) 螺丝刀刀厚 × 刀宽 (mm) Screwdriver Knife × width		1.2×10 2.0×12 2.5×14 2.5×14 2.5×14	
(2) 标记条：有横向和竖向两种字体，10 位。 Mark bar: two character styles, with horizontal and vertical arrangements, ten spaced.		ZB10	3010108005

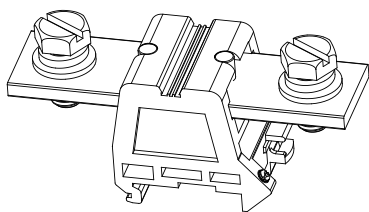

(3) 外形尺寸  
External dimension

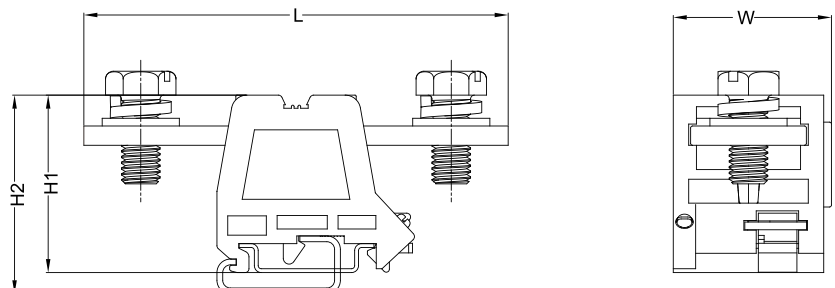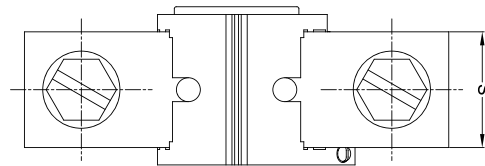

# JUT5 Series Industrial Distribution Terminal Block

## JUT5 系列工业配电接线端子

### 结构特征


JUT5 系列大电流接线分接端子由绝缘基座、接线框、防护罩三部分组成。接线框由导电夹、螺钉、螺母及支撑框组成。导电夹与导线接触面呈包容型的犬牙交错结构，具有接触面大，压接可靠的特点。通过不同形状的导电夹的相互组合，使其不仅具有通用型接线端子的一般功能，还可派生出大电流分接端子和母线排接线端子。能满足所有电控配电、成套装置中的大截面导线连接和导线的分接等各种用途。

本系列端子默认颜色：白色 (WT) 支持客户定制颜色

### Structure's properties


JUT5 series of great-current wiring/tapping terminal is composed of insulation base, wiring frame, protection cover. The wiring frame is composed of electrical conduction clamp, screw, nut and supporter frame, the conduction-clamp and lead contacted-face and reliable pressing/connection. With mutual combination of different-shape conduction clamp, this terminal not only owns common function of universal wiring terminal and bus row wiring terminal, which could realize big section lead connection in all electronic control distribution, complete sets appliance, tapping operation of lead etc.

图 1



一路电缆连接进线端或出线端  
1<sup>st</sup> circuit cable connecting with wire-in or wire-out terminal

图 2




一路铜排连接进线端或出线端  
1<sup>st</sup> circuit cable copper-row connecting with wire-in or wire-out terminal

图 3




二路电缆连接进线端或出线端  
2<sup>nd</sup> circuit cable connecting with wire-in or wire-out terminal

图 4



三路电缆连接一路进线二路出线  
3<sup>rd</sup> circuit cable connecting with 1<sup>st</sup> circuit wire-in/2<sup>nd</sup> circuit wire-out

图 5





四路电缆连接出线端  
4<sup>th</sup> circuit cable connecting with wire-out terminal

				型号 Model	形式 Mould	已上线范围 (mm <sup>2</sup> ) Wire-pressing scope (mm <sup>2</sup> )	外形尺寸 (厚 / 宽 / 高 mm) Appearance dimension (deep/with/high)					
<p>额定参数 rated parameter 电流 / 电压 160/1000 (A) current/voltage 接线容量 16-95(mm<sup>2</sup>) Wiring capacity A.W.G 4-000 安装螺钉 installment screw M5(mm)</p>	95	白色 (WT)	3010701001	95B	白色 (WT)	3010701002	95C	白色 (WT)	3010701003	95D	白色 (WT)	3010701004
				JUT5-95B/WT	一路进 (铜排) 一路出 (铜排) 图 2	1 <sup>st</sup> circuit in (copper row) 1 <sup>st</sup> circuit out (copper row)	铜排宽 ≤ 18 copper-plate's width ≤ 18	31 × N+9/115/76(93)				
				JUT5-95C/WT	一路进 (铜排) 一路出 (电缆) 图 2. 图 1	1 <sup>st</sup> circuit in (copper row) 1 <sup>st</sup> circuit out (cable)	进 (宽 ≤ 18) 出 16-95 in (width ≤ 18) out 16-95	31 × N+9/115/76(93)				
				JUT5-95D/WT	一路进 (电缆) 二路出 (电缆) 图 1. 图 3	1 <sup>st</sup> circuit in (cable) 2 <sup>nd</sup> circuit out (cable)	进 16-95 出 16-50 In 16-95 out 16-50	31 × N+9/115/76(105)				
<p>额定参数 rated parameter 电流 / 电压 160/1000 (A) current/voltage 接线容量 25-150(mm<sup>2</sup>) Wiring capacity A.W.G 2-300 安装螺钉 installment screw M5(mm)</p>	150	白色 (WT)	3010701011	150B	白色 (WT)	3010701012	150C	白色 (WT)	3010701013	150D	白色 (WT)	3010701014
				JUT5-150B/WT	一路进 (铜排) 一路出 (铜排) 图 2	1 <sup>st</sup> circuit in (copper row) 1 <sup>st</sup> circuit out (copper row)	铜排宽 ≤ 18 copper-plate's width ≤ 18	31 × N+9/115/88(105)				
				JUT5-150C/WT	一路进 (铜排) 一路出 (电缆) 图 2. 图 1	1 <sup>st</sup> circuit in (copper row) 1 <sup>st</sup> circuit out (cable)	进 (宽 ≤ 18) 出 25-150 in (width ≤ 18) out 25-150	31 × N+9/115/88(105)				
				JUT5-150D/WT	一路进 (电缆) 二路出 (电缆) 图 1. 图 3	1 <sup>st</sup> circuit in (cable) 2 <sup>nd</sup> circuit out (cable)	进 25-150 出 16-70 In 25-150 out 16-70	31 × N+9/115/103(120)				
<p>额定参数 rated parameter 电流 / 电压 400/1000 (A) current/voltage 接线容量 35-240(mm<sup>2</sup>) Wiring capacity A.W.G 2-400MCM 安装螺钉 installment screw M6(mm)</p>	240	白色 (WT)	3010701021	240B	白色 (WT)	3010701022	240C	白色 (WT)	3010701023	240D	白色 (WT)	3010701024
				JUT5-240B/WT	一路进 (铜排) 一路出 (铜排) 图 2	1 <sup>st</sup> circuit in (copper row) 1 <sup>st</sup> circuit out (copper row)	铜排宽 ≤ 25 copper-plate's width ≤ 25	46 × N+9/115/103(120)				
				JUT5-240C/WT	一路进 (铜排) 一路出 (电缆) 图 2. 图 1	1 <sup>st</sup> circuit in (copper row) 1 <sup>st</sup> circuit out (cable)	进 (宽 ≤ 18) 出 35-240 in (width ≤ 18) out 35-240	46 × N+9/115/103(120)				
				JUT5-240D/WT	一路进 (电缆) 二路出 (电缆) 图 1. 图 3	1 <sup>st</sup> circuit in (cable) 2 <sup>nd</sup> circuit out (cable)	进 35-240 出 35-240 In 35-240 out 35-240	62 × N+9/140/110(127)				
<p>额定参数 rated parameter 电流 / 电压 630/1000 (A) current/voltage 接线容量 50-300(mm<sup>2</sup>) Wiring capacity A.W.G 1-500MCM 安装螺钉 installment screw M6(mm)</p>	300	白色 (WT)	3010701031	300B	白色 (WT)	3010701032	300C	白色 (WT)	3010701033	300D	白色 (WT)	3010701034
				JUT5-300B/WT	一路进 (铜排) 一路出 (铜排) 图 2	1 <sup>st</sup> circuit in (copper row) 1 <sup>st</sup> circuit out (copper row)	铜排宽 ≤ 30 copper-plate's width ≤ 30	62 × N+10/140/110(127)				
				JUT5-300C/WT	一路进 (铜排) 一路出 (电缆) 图 2. 图 1	1 <sup>st</sup> circuit in (copper row) 1 <sup>st</sup> circuit out (cable)	进 (宽 ≤ 30) 出 50-300 in (width ≤ 30) out 50-300	62 × N+10/140/110(127)				
				JUT5-300D/WT	一路进 (电缆) 二路出 (电缆) 图 1. 图 3	1 <sup>st</sup> circuit in (cable) 2 <sup>nd</sup> circuit out (cable)	进 50-300 出 25-150 In 50-300 out 25-150	72 × N+9/140/137(166)				



# Industrial Distribution Terminal Blocks

## Base type terminal series

工业配电接线端子 - 基座型接线端子系列

		三大电流接线端子 3-bit great current wiring terminal		JUT6-603/BK		JUT6-1003/BK	
	订货型号 Order Number	黑色 (BK)	3010801001	黑色 (BK)	3010801002		
	电流 / 电压 (A/V) Current/Voltage(A/V)	76/690		101/690			
	极数 / 导线截面 (极 /mm <sup>2</sup> ) Pole quantity lead section	3/16 AWG:6		3/25 AWG:4			
	安装螺钉 (mm) Installment screw(mm)	M6		M6			
		四大电流接线端子 4-bit great current wiring terminal		JUT6-604/BK		JUT6-1004/BK	
	订货型号 Order Number	黑色 (BK)	3010801007	黑色 (BK)	3010801008		
	电流 / 电压 (A/V) Current/Voltage(A/V)	76/690		101/690			
	极数 / 导线截面 (极 /mm <sup>2</sup> ) Pole quantity lead section	4/16 AWG:6		4/25 AWG:4			
	安装螺钉 (mm) Installment screw(mm)	M6		M8			

### JUT7 螺钉式组合型接线端子排系列 JUT7 Screw combination-type wiring terminal row series

		螺钉式多极接线端子 Screw-type many-pole wiring terminal		JUT7-2.5/2C/BK		JUT7-2.5/3C/BK	
	订货型号 Order Number	黑色 (BK)	3010901001	黑色 (BK)	3010901002		
	L/W/ 宽 高 + 盖高 Thickness/W/Width 高 + 盖高 Height+Cover Height	20/840/34+2		25/6.7/40/34+2			
	电流 / 电压 (A/V) Current/Voltage(A/V)	24/690		24/690			
	极数 / 导线截面 (极 /mm <sup>2</sup> ) Pole quantity lead section	2/2.5 AWG:14		3/2.5 AWG:14			
		螺钉式单极接线端子 screw-type single-pole wiring terminal		JUT7-10C/BK		JUT7-16C/BK	
	订货型号 Order Number	黑色 (BK)	3010901005	黑色 (BK)	3010901006		
	L/W/ 宽 高 + 盖高 Thickness/W/Width 高 + 盖高 Height+Cover Height	15.5/13.5/45/8+2		22/18/56/8+2			
	电流 / 电压 (A/V) Current/Voltage(A/V)	57/690		76/690			
	极数 / 导线截面 (极 /mm <sup>2</sup> ) Pole quantity lead section	-/10 AWG:8		-/16 AWG:6			
		安装螺钉 (mm) Installment screw(mm)		M4		M6	

\*JUT7-2.5/2C 表示带盖罩, JUT7-2.5/2 表示不带盖罩。  
JUT7-2.5/2C means with-cover, JUT7-2.5/2 means without-cover

# Industrial Distribution Terminal Blocks

## Base type terminal series

工业配电接线端子 - 基座型接线端子系列


JUT6-1503/BK		JUT6-2003/BK		JUT6-3003/BK		JUT6-4003/BK	
黑色 (BK)	3010801003	黑色 (BK)	3010801004	黑色 (BK)	3010801005	黑色 (BK)	3010801006
150/690		232/690		309/690		101/690	
3/50 AWG:0		3/120 AWG:250MCM		3/1506 AWG:300MCM		3/240 AWG:500MCM	
M8		M8		M10		M12	
JUT6-1504/BK		JUT6-2004/BK		JUT6-3004/BK		JUT6-4004/BK	
黑色 (BK)	3010801009	黑色 (BK)	3010801010	黑色 (BK)	3010801011	黑色 (BK)	3010801012
150/690		232/690		309/690		415/690	
4/50 AWG:0		4/120 AWG:250		4/150 AWG:300MCM		4/240 AWG:500MAM	
M8		M8		M10		M12	

型号 Model	尺寸 Dimension				
	L	B	H	A	W
JUT6-603	86.5	42.7	31	25.5	17
JUT6-1003	86.5	55.2	36.3	28.0	22.5
JUT6-1503	115	67	40	30.5	25.3
JUT6-2003	133	72.1	44.4	34	28.3
JUT6-3003	164	89.4	50.6	47.5	30
JUT6-4003	164	89.4	50.6	47.5	36

型号 Model	尺寸 Dimension				
	L	B	H	A	W
JUT6-604	115	42.7	31	25.5	17
JUT6-1004	137.5	55.2	36.3	28.0	22.5
JUT6-1504	153	67	40	30.5	25.3
JUT6-2004	177	72.1	44.4	34	28.3
JUT6-3004	218	89.4	50.6	47.5	30
JUT6-4004	218	89.4	50.6	47.5	36

JUT6

JUT7-4/3C/BK		JUT7-6/3C/BK	
黑色 (BK)	3010901003	黑色 (BK)	3010901004
35/9.7/40/34+2		43/9.7/45/38+2	
32/690		41/690	
3/4	AWG:12	3/6	AWG:10
M3.5		M4	

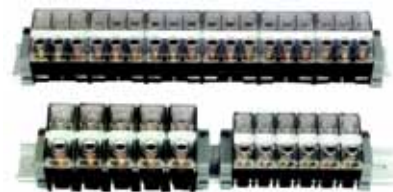

JUT7-35C/BK		JUT7-95C/BK		JUT7-150C/BK	
黑色 (BK)	3010901007	黑色 (BK)	3010901008	黑色 (BK)	3010901009
35/9.7/40/34+2		43/9.7/45/38+2		62/52.3/125/77+3.5	
32/690		41/690		309/690	
3/4	AWG:12	3/6	AWG:10	-/150	AWG:300MVM
M6		M8		M10	

固定件 / 安装轨 Fixed component/installment track



名称 appellation	型号 Model	订货号 Order Number
固定件 Fixed component	E7	3010903001
安装轨 Installment track	NS35/7.5-AL	3010113002

# Industrial Distribution Terminal Blocks

## Base type terminal series

### 工业配电接线端子 - 基座型接线端子系列

在电气设备的电气线路中,经常会将中线(N线)、地线(PE线)或相线(L线)接到中央汇流条上。因此必须对导线及端子与相应回的所属关系作出明确标识。

JUT8系列能从两个方面满足上述要求。

可对每个端子分别进行标识;


端子具有蓝色(N线)、黄绿线(PE线)、黑色(L线)三种标识。

In the electrical wire of electrical equipment,operator often connects neutral line(N), earth line(PE)or looks—line (L) onto center junction strip, so operator should clearly mark the ownership relationship of lead,terminal and corresponding circuit.JUT8 series could meet above demand from two aspects:

could mark separately every terminal;  
terminal has blue(neutral line), yellow/green (earth line), black(looks-line) three identifications.



L/N/PE 接线端子 L/N/PE wiring terminal

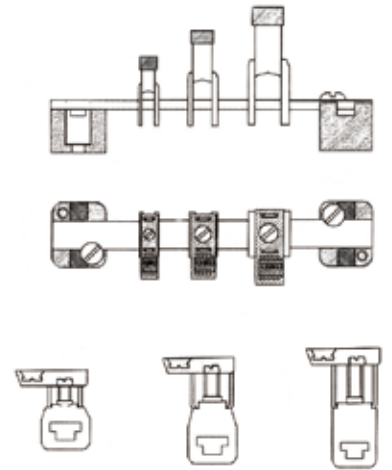


JUT8-4      JUT8-16      JUT8-35

JUT8-4			JUT8-16			JUT8-35		
刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I	刚性导线 (mm <sup>2</sup> )	柔性导线 (mm <sup>2</sup> )	I
Rigid cable	Soft cable	(A)	Rigid cable	Soft cable	(A)	Rigid cable	Soft cable	(A)
0.5-6	0.5-4	41	1.5-16	1.5-16	76	2.5-35	2.5-35	125
AWG:20-10 IEC 60947-7-1			AWG:16-4 IEC 60947-7-1			AWG:14-2 IEC 60947-7-1		

#### 说明 Specification 简图 Schematic Drawing

端子:铜制件、镀锡、悬挂在N线汇流条上。  
Terminal:made of copper,nickel plating suspend-connected on N line's junction strip

(1)N线汇流条:铜制件、镀锡,3x10mm,1m长。  
N line's junction strip,made of copper,nickel plation.3\* 10mm,with 1m length



(2)双垫块:由绝缘材料制成。  
Double-heel:made of insulation material



(3)垫块:由绝缘材料制成。  
Heel:made of insulation material



(4)支架:带通用安装脚可安装在C型,或L型导轨上。  
Support:with universal installment foot,it could ba in-stalled on C->5 type or L-type track.



(5)标记带:10位  
Mark strip:10bits



型号 Model		订货号 Order Number	
JUT8-4	黑色(BK) 蓝色(BE) 3011001001 3011001004	JUT8-16	黑色(BK) 蓝色(BE) 3011001002 3011001005
JUT8-35	黑色(BK) 蓝色(BE) 3011001003 3011001006	NUT3/10	3011002001
DKS-2	3011003002	DKS-2	3011003002
DKS	3011003001	DKS	3011003001
UTB1	3011004001	UTB1	3011004001
ZB6	3010108002	ZB6	3010108004

# End Stopper

## 导轨用终端固定件



E/1		E/1A		E/1B	
订货号 Order Number		订货号 Order Number		订货号 Order Number	
灰色 (GY)	3010110001	灰色 (GY)	3010110006	灰色 (GY)	3010110005
米黄色 (CM)	3010110004				
深灰色 (DK/GY)	3010110008				
黄色 (YL)	3010110023				



E/1E		E/2		E/3	
订货号 Order Number		订货号 Order Number		订货号 Order Number	
灰色 (GY)	3010110002	米黄色 (CM)	3010308002	灰色 (GY)	3010506001
		深灰色 (DK/GY)	3010308003		
		灰色 (GY)	3010308004		
		蓝色 (BE)	3010308005		

附件




























E/4		E/6A		E/6B	
订货号 Order Number		订货号 Order Number		订货号 Order Number	
半透明	3010603001	灰色 (GY)	3010110020	灰色 (GY)	3010110021



# End Plate

## 产品端板

				
G-JUT1-2.5S	G-JUT1-2.5/4	G-JUT1-2.5/10	G-JUT1-2.5/4Q	DP-JUT1-2.5/4Q
				
G-JUT1-4/1-2	G-JUT1-4/2-2	G-JUT1-6S	G-JUT2-2.5	DP-JUT2-4/2
				
TW	G-JUT2-4RD	G-JUT2-6S1	G-JUT2-16	DP-JUT2-35
				
TW2.5	TW4-10	G-JUT3-1.5/2.5	G-JUT3-2.5/2	DP-JUT3-2.5/1-2
				
G-JUT3-2.5/2-2	G-JUT3-4	G-JUT3-4/2-2	JAP-6S	JAP

附件

# Quick Tag Bar

## 快速标记条



**ZB4**

订货号 Order Number 3010108001



**ZB5**

订货号 Order Number 3010108003



**ZB6**

订货号 Order Number 3010108002



**ZB8**

订货号 Order Number 3010108004



**ZB10**

订货号 Order Number 3010108005



**DEK5**

订货号 Order Number 3010307001



**ZBFM4**

订货号 Order Number 3010505001



**ZBFM5**

订货号 Order Number 3010505002



**ZBFM6**

订货号 Order Number 3010505003



**ZBFM8**

订货号 Order Number 3010505004



**JUT4-B**

订货号 Order Number 3010601012



**JUT2-3B**

订货号 Order Number 3010301020

附件

# Installation Guide

## 安装导轨



**NS35/7.5**

订货号 Order Number 3010113001

**NS35/15**

订货号 Order Number 3010113083



**NS35/7.5**

订货号 Order Number 3010113002

**NS35/15**

订货号 Order Number 3230374



**NS32/15**

订货号 Order Number 3010113010



**NS32/15**

订货号 Order Number 3010113009



**NS15/5.5**

订货号 Order Number 3010113003

附件



**JUTDR2**

订货号 Order Number 3010113028

**JUTDR4**

订货号 Order Number 3010113029

导轨切割机的特点：设计新颖，结构合理、省力、特殊设计的刀模，使切断面平整、无毛刺。

用途：适用于钢或铝合金材质导轨的切断作业。

The properties of guide-track cut-off machine: creatable/new design,rational structure, economizing labor, the knife-model of special designcan mak cutting surface and non-rag.

Usage: used for cutting operation of steel or Al alloy guide track.

# 应用领域广泛... 应用经验丰富...

